


/ Descriptions

/ Features

/ Applications

/ Equivalent Circuit



/ Pinning



/  $h_{FE}$  Classifications & Marking

|  |  |  |
|--|--|--|
|  |  |  |
|  |  |  |

/ Absolute Maximum Ratings(Ta=25 )


|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |

/ Electrical Characteristics(Ta=25 )


|  |  |   |  |  |  |   |
|--|--|---|--|--|--|---|
|  |  |   |  |  |  |   |
|  |  | μ |  |  |  |   |
|  |  |   |  |  |  |   |
|  |  | μ |  |  |  |   |
|  |  |   |  |  |  | μ |
|  |  |   |  |  |  | μ |
|  |  |   |  |  |  |   |
|  |  |   |  |  |  |   |
|  |  |   |  |  |  |   |
|  |  |   |  |  |  |   |
|  |  |   |  |  |  |   |

2SB1566

/ Marking Instructions

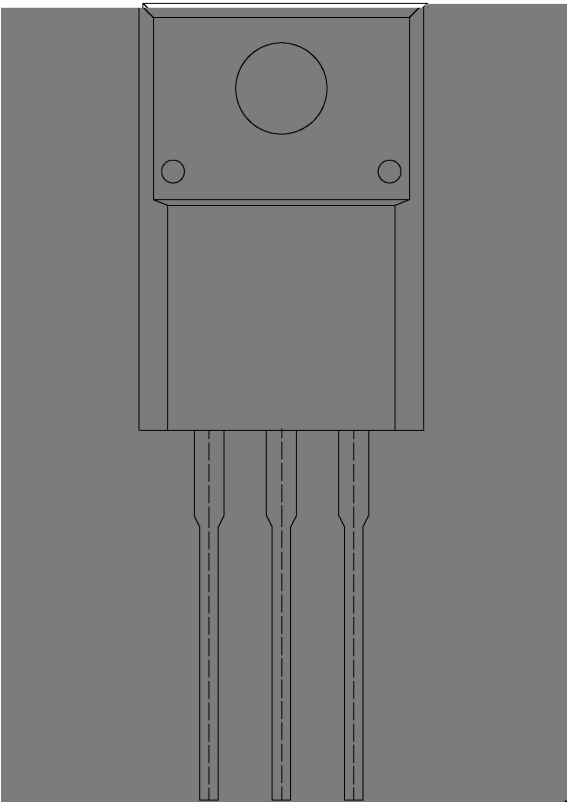

(     ) / Temperature Profile for Dip Soldering(Pb-Free)

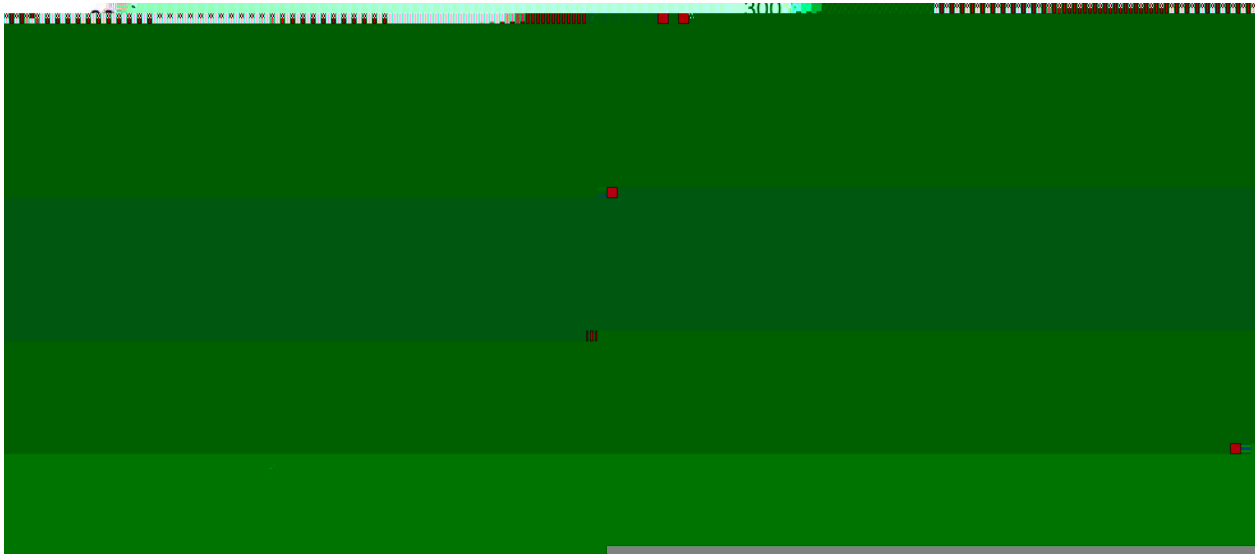

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.