

/ Descriptions


TO-3P          PNP

/ Features


60W                  2SD1047

/ Applications

/ Equivalent Circuit



/ Pinning




/  $h_{FE}$  Classifications & Marking


|  |  |
|--|--|
|  |  |
|--|--|




## I Electrical Characteristic Curve

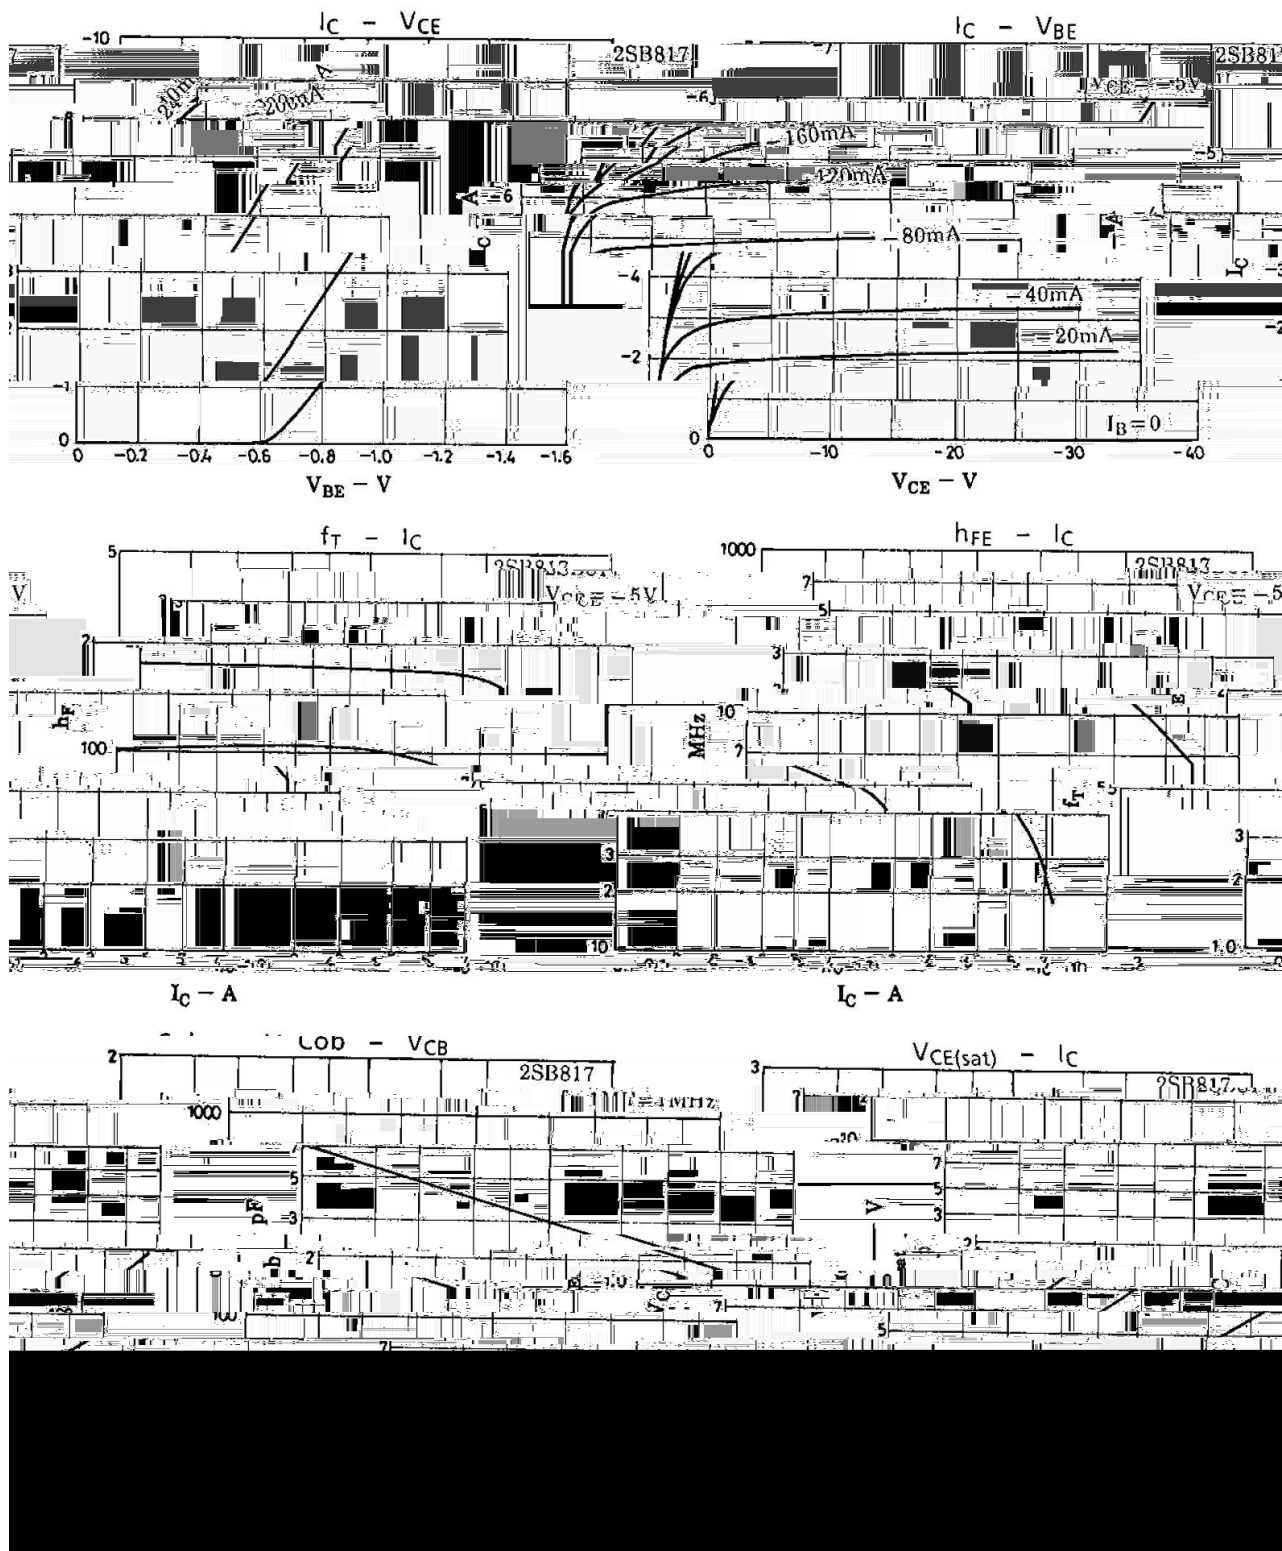


### / Electrical Characteristic Curve

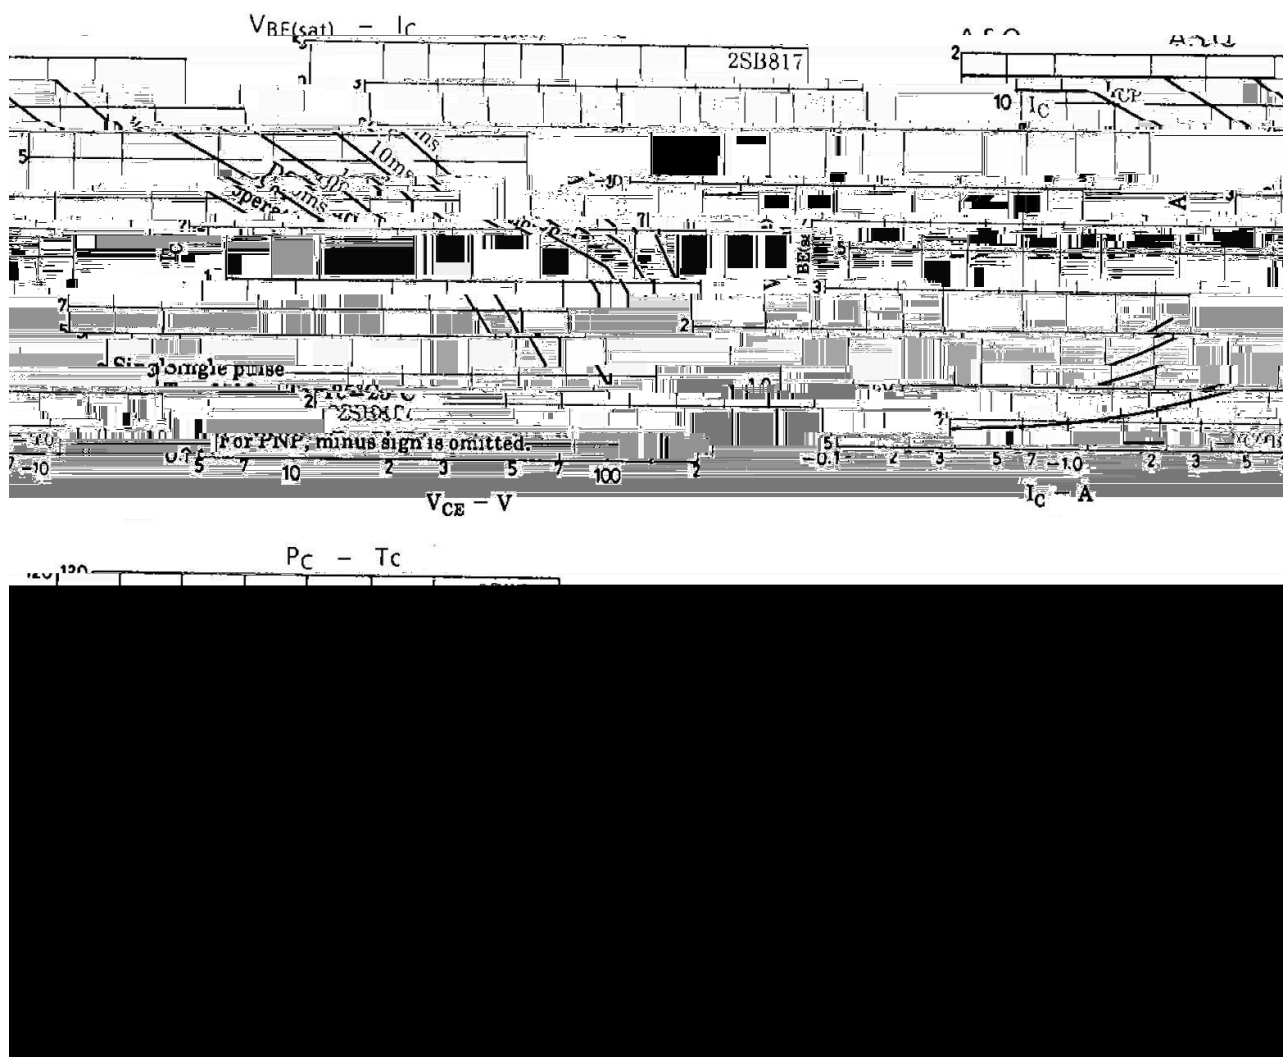

/ Package Dimensions

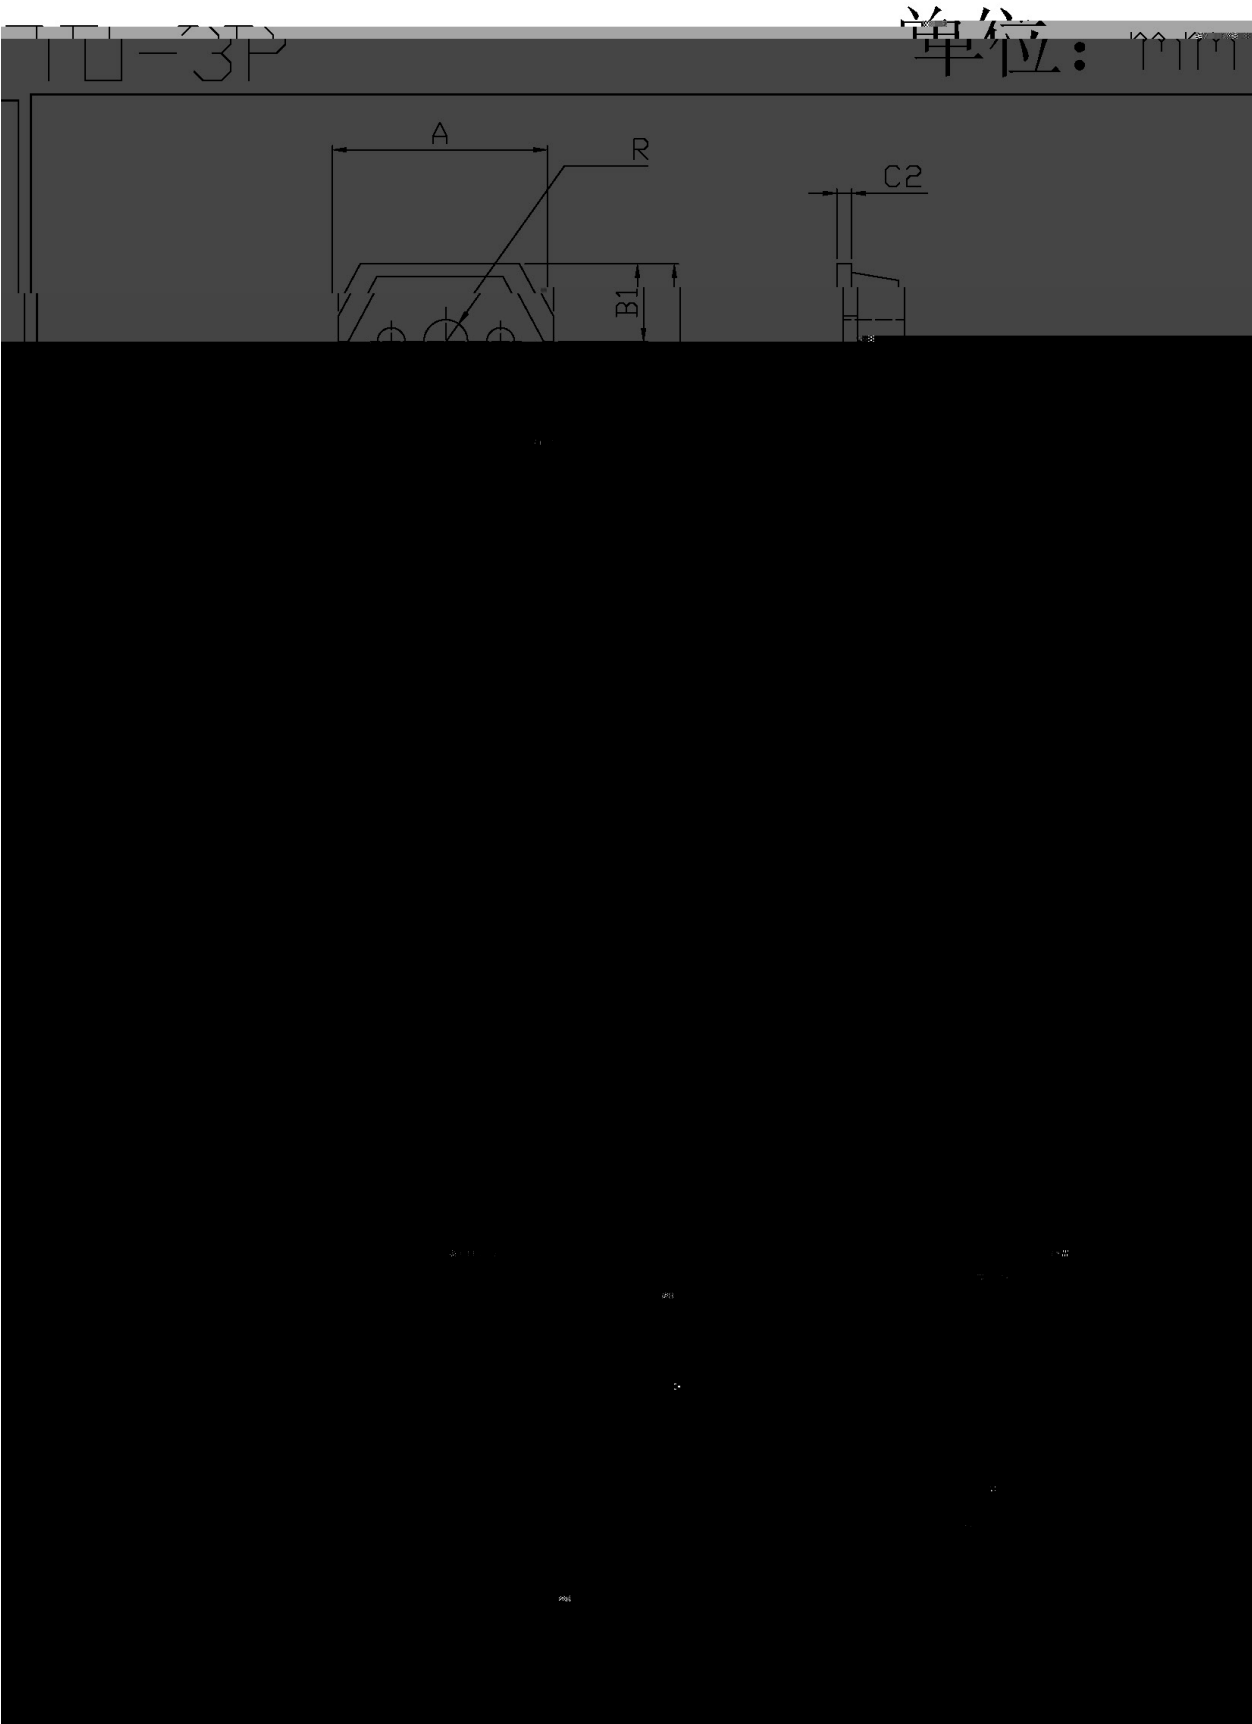

/ Marking Instructions

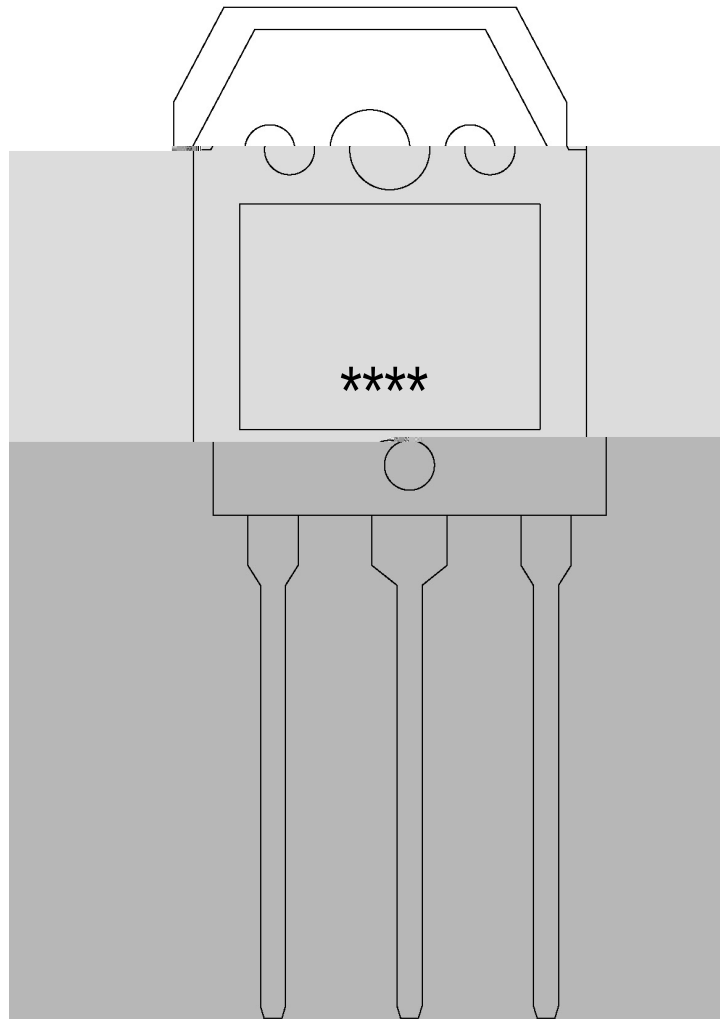


BR

B817

\*\*\*\*

( ) / Temperature Profile for Dip Soldering(Pb-Free)

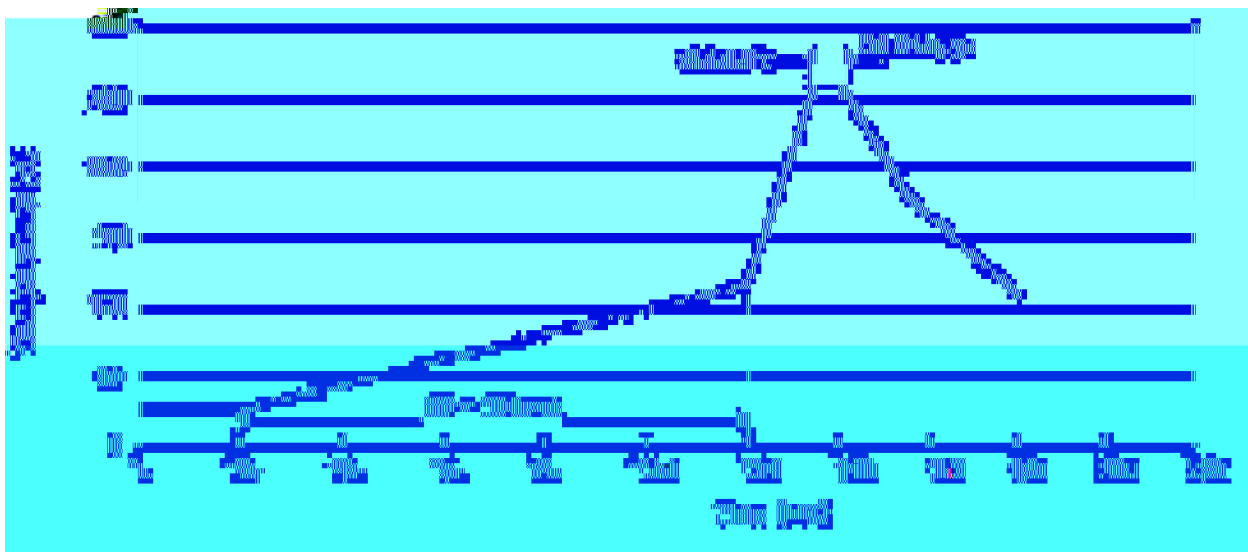 $\pm$  $\pm$  $\pm$  $\pm$ 

## / Resistance to Soldering Heat Test Conditions

 $\pm$  $\pm$ 

## / Packaging SPEC.

| 封装形式  | 包装数量               |                         |                        |                              |                        | 包装尺寸       |             |             |
|-------|--------------------|-------------------------|------------------------|------------------------------|------------------------|------------|-------------|-------------|
|       | Units/Tube<br>只/套管 | Tubes/Inner Box<br>套管/盒 | Units/Inner Box<br>只/盒 | Inner Boxes/Outer Box<br>盒/箱 | Units/Outer Box<br>只/箱 | Tube 套管    | Inner Box 盒 | Outer Box 箱 |
| TO-3P | 30                 | 15                      | 450                    | 5                            | 2250                   | 497.5×46×8 | 555×164×50  | 575×290×180 |

## / Notices