

/ Descriptions


TO-220 PNP

/ Features


， 2SD880

/ Applications

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking


/ Absolute Maximum Ratings(Ta=25)

	℃		
			℃
			℃


/ Electrical Characteristics(Ta=25)

						μ
						μ
						μ


/ Electrical Characteristic Curve

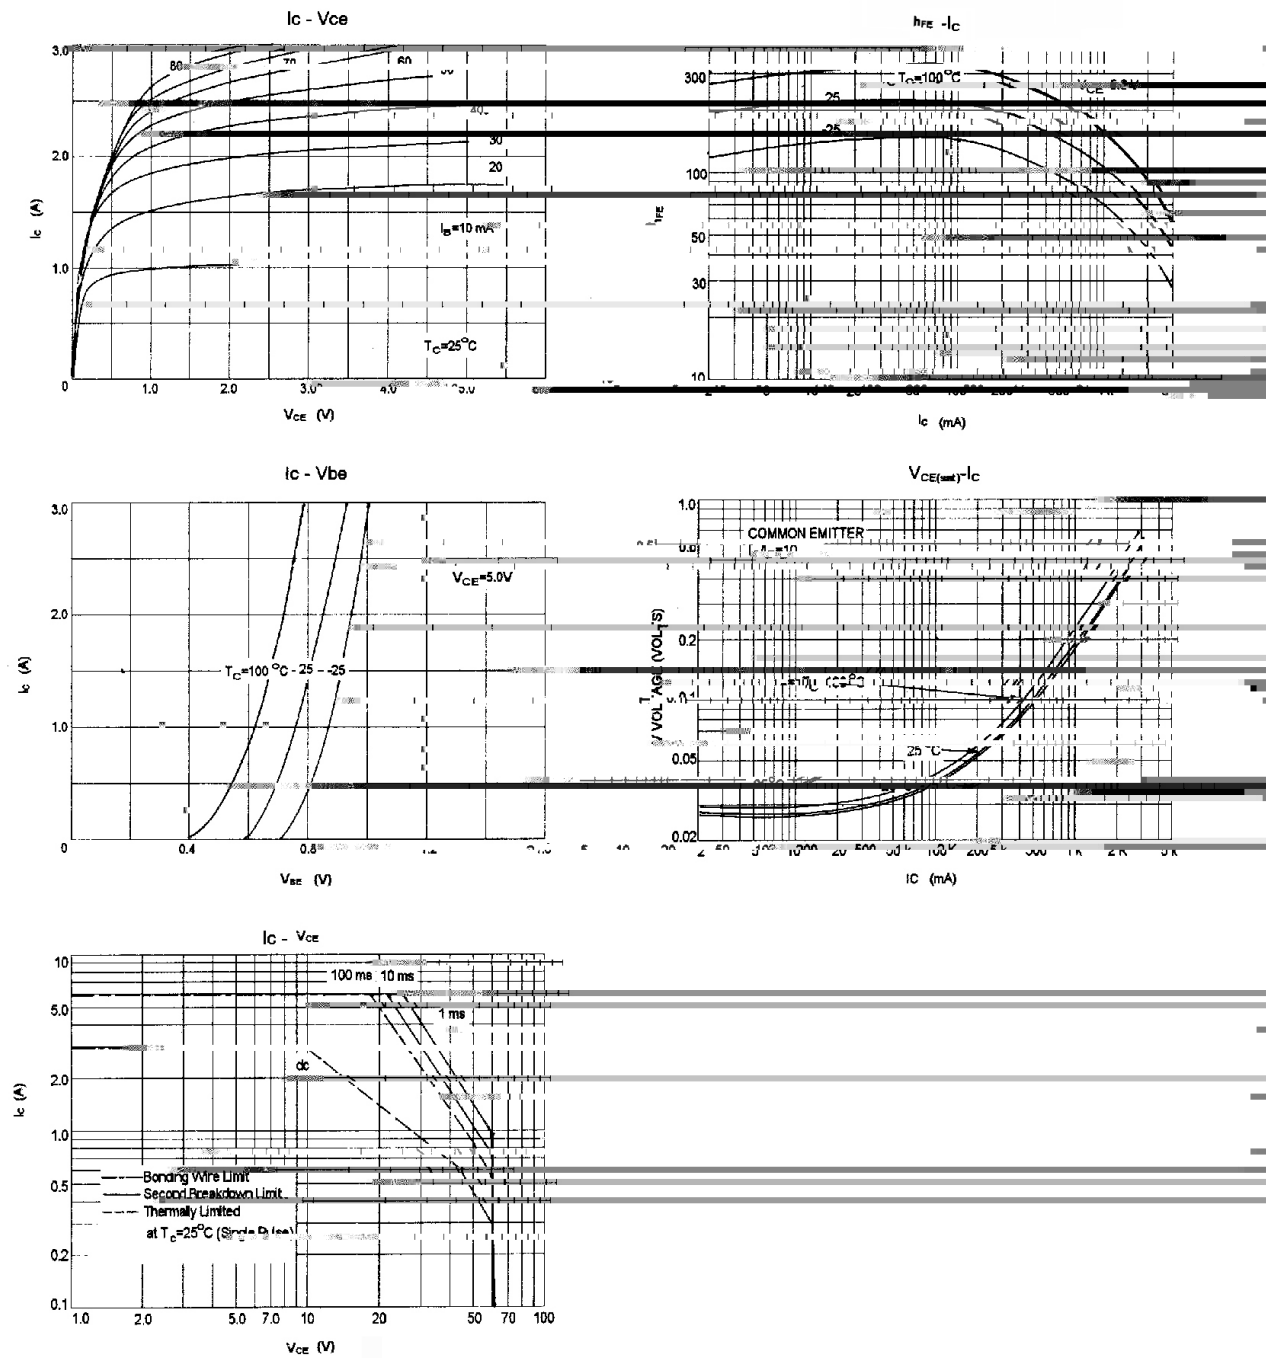

/ Package Dimensions

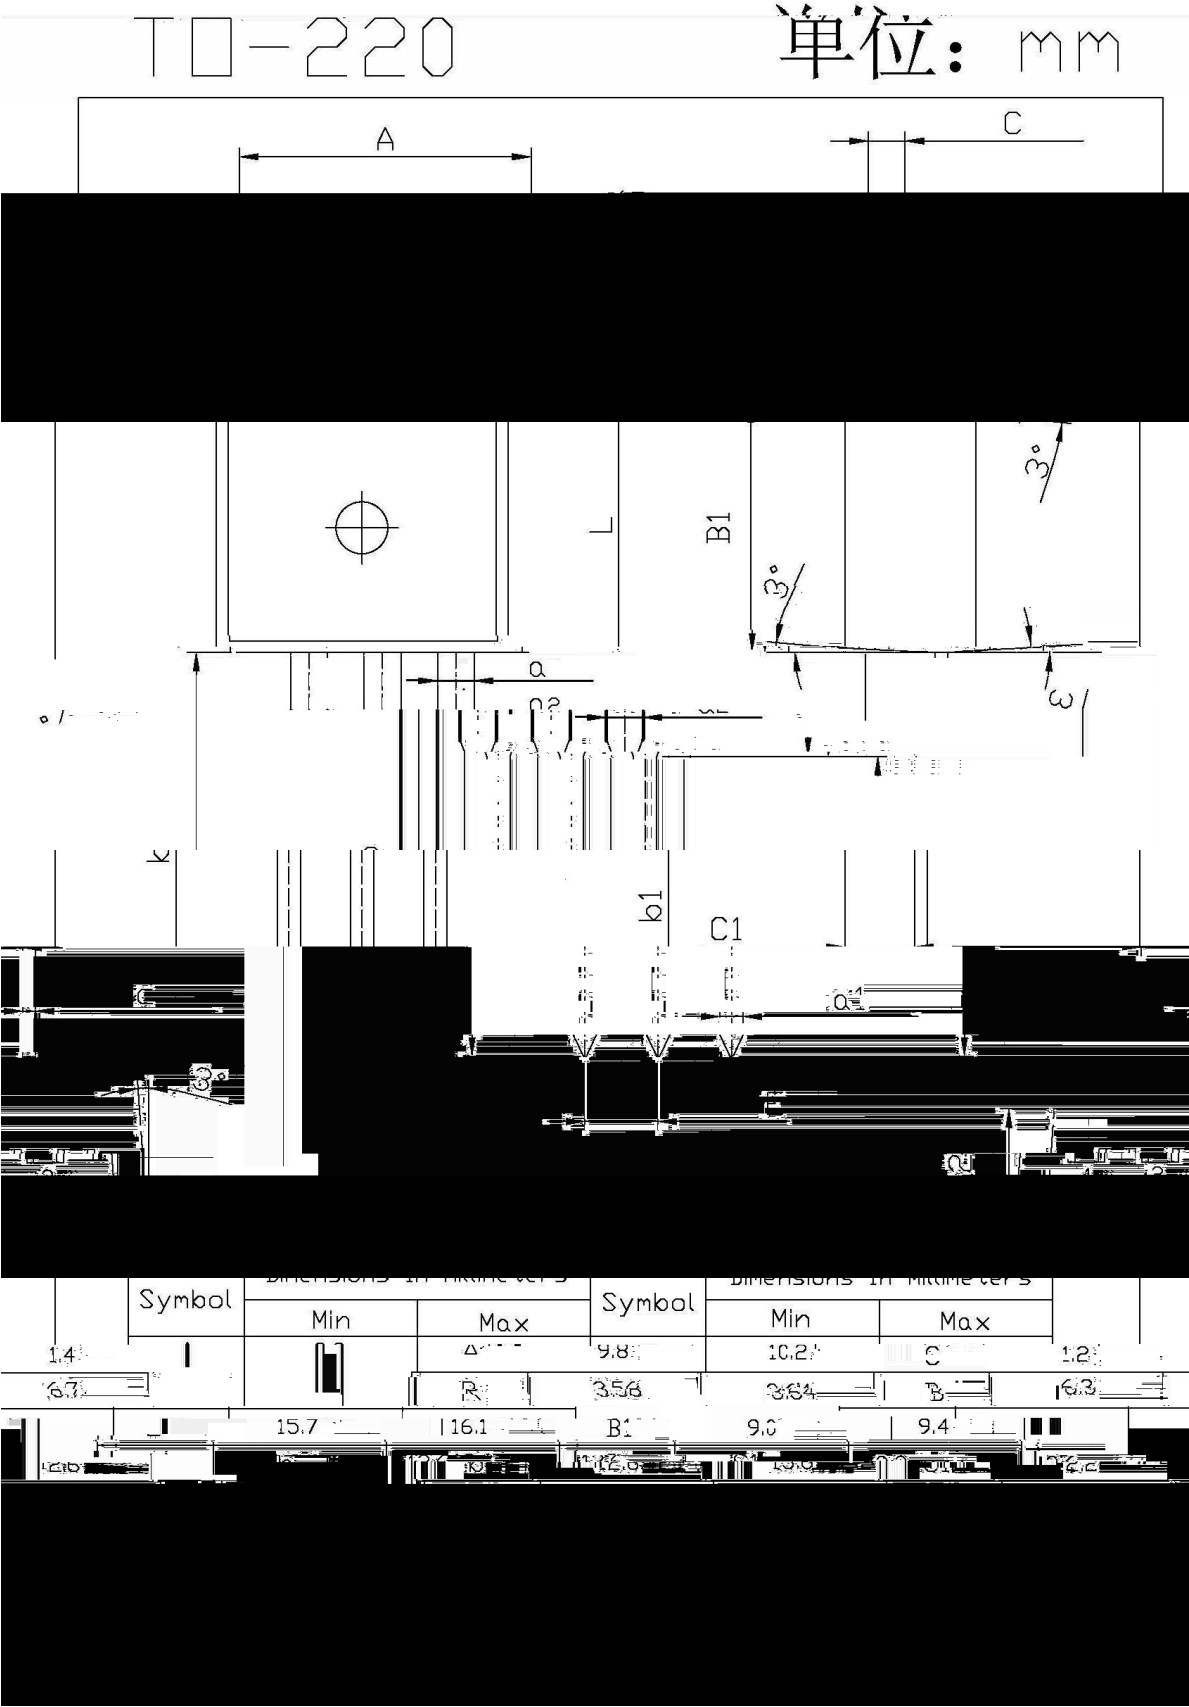

/ Marking Instructions

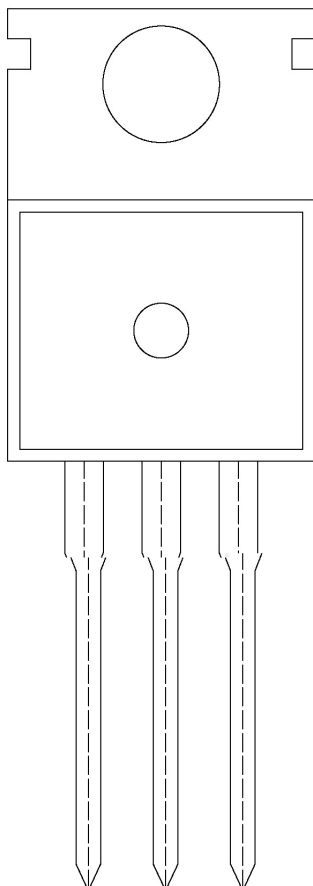


BR

B834

O:

 h_{FE}

() / Temperature Profile for Dip Soldering(Pb-Free)

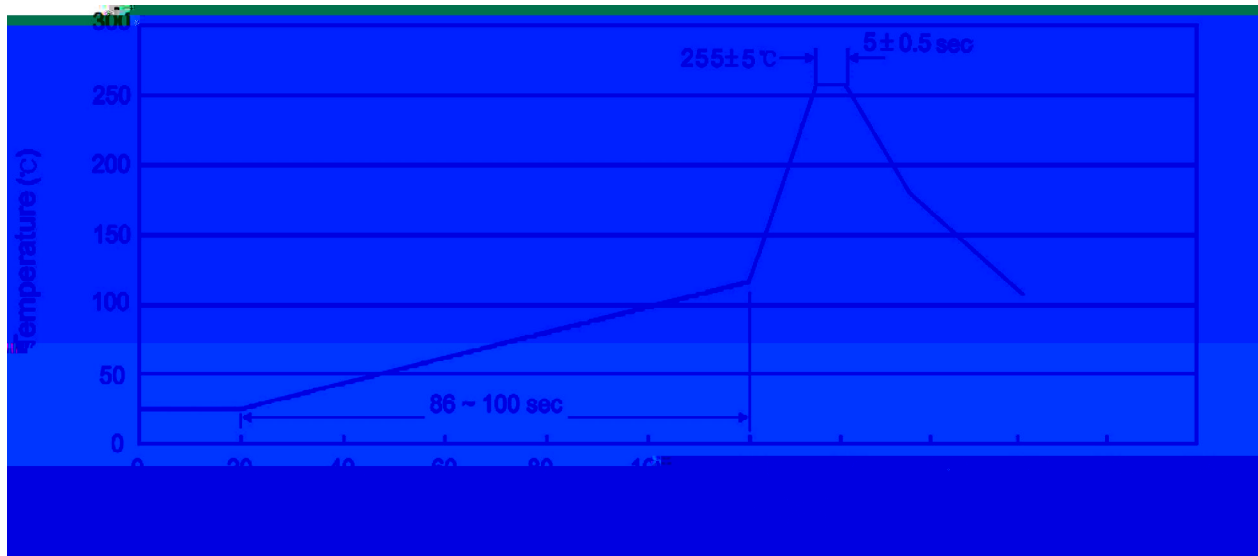 $\pm$ $\pm$ $\pm$ $\pm$

/ Resistance to Soldering Heat Test Conditions

 $\pm$ $\pm$

°C

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只袋	袋盒	只盒	盒箱	只箱	袋	盒	箱

封装形式	包装数量					包装尺寸		
	只 套管	套管 盒	只 盒	盒 箱	只 箱	套管	盒	箱

/ Notices