

/ Revised record

A	2018-11-7		78D05		
A	2020-4-8		$\Delta V_{Load} / \Delta V_{Line} = 80/40/60/30$ 100/50/100/50		

/ Descriptions

TO-263 Voltage Regulator in a TO-263 Plastic Package.


/ Features

1.0A,
3-Terminal regulators ,output current up to 1.0A, internal thermal overload protection and short-circuit limiting.

/ Applications

Voltage Regulator.

/ Equivalent Circuit or Application Circuit

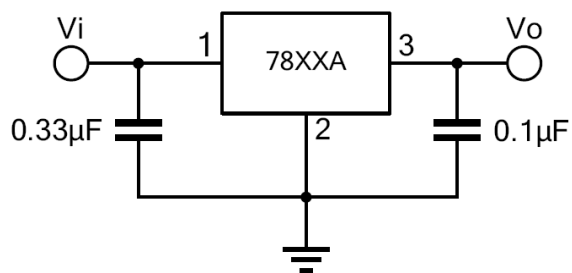

/ Pinning



PIN1 IN PIN 2 4 GND PIN 3 OUT


/ Marking


◦ See Marking Instructions.

/ Electrical Characteristic Curve




/ Package Dimensions

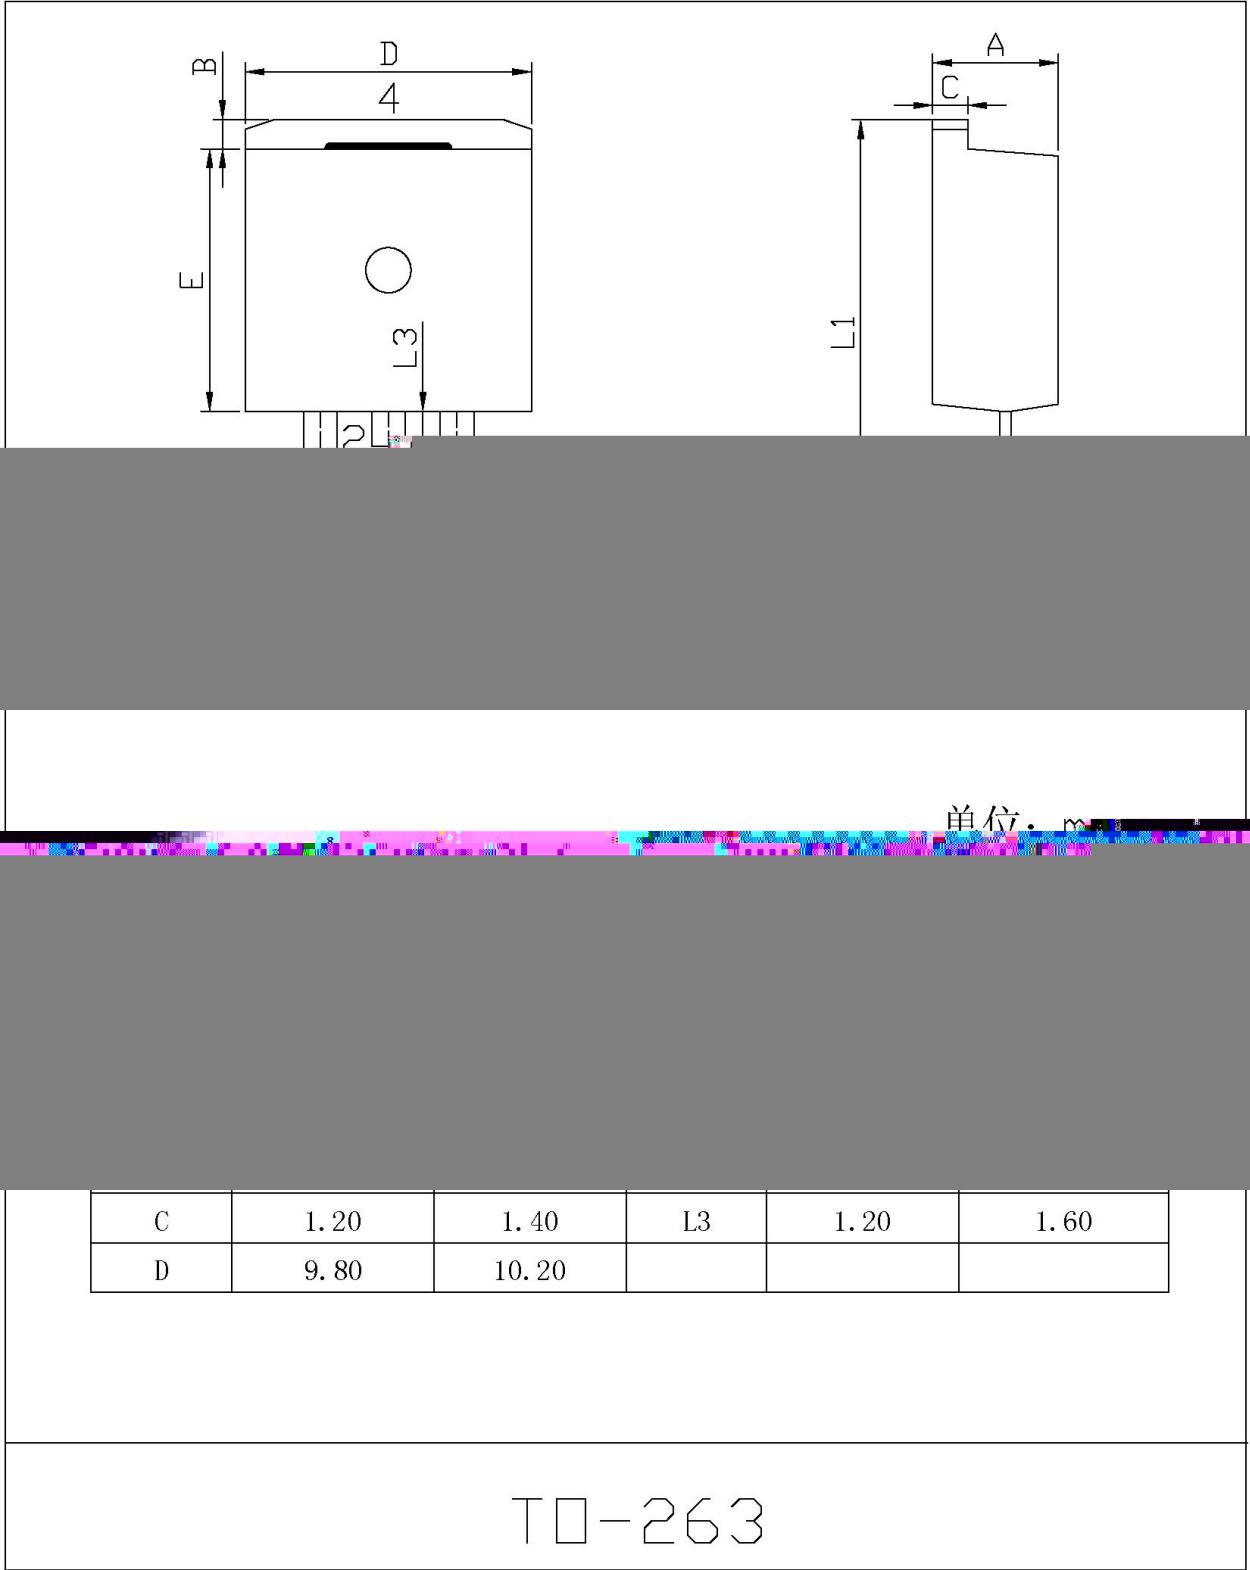

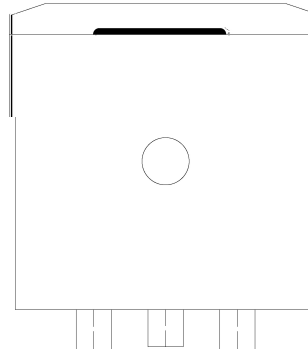

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

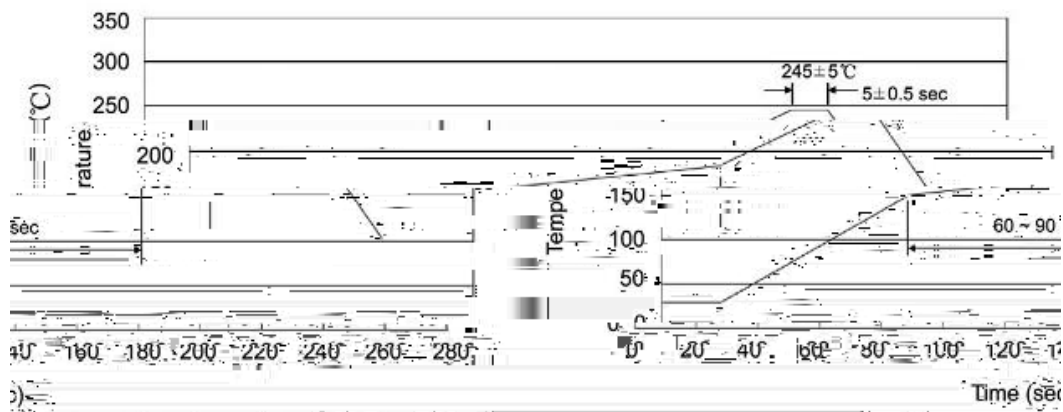

Note:

- | | | | | | |
|---|-------|-----|-----------|--------|---|
| 1 | 150 | 180 | 60 | 90sec; | 1.Preheating:150~180 , Time:60~90sec. |
| 2 | 245±5 | | 5±0.5sec; | | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

/ Resistance to Soldering Heat Test Conditions

260±5 10±1 sec. Temp:260±5℃ Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
TO-263	800	1	800	5	4,000	13" × 24	360×360×50	385×257×392

/ TUBE

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Tube 只/套管	Tubes/Inner Box 套管/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Tube 套管	Inner Box 盒	Outer Box 箱
TO-263	50	20	1,000	5	5,000	532×33×7.0	555×164×50	575×290×180

