


/ Descriptions


/ Features

/ Applications

/ / Equivalent Circuit or Application Circuit

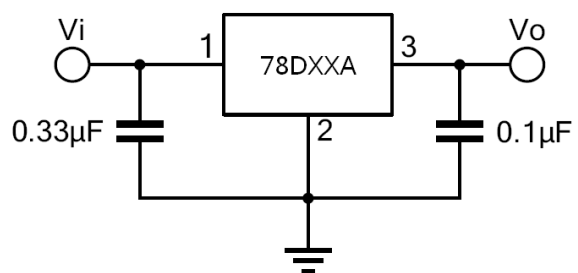

/ Pinning


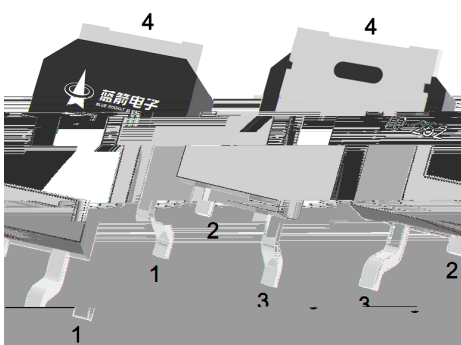


/ Marking


/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(Vi=23V,Io=500mA,Tj=-30 ~125 ,unless otherwise specified

/ Electrical Characteristic Curve

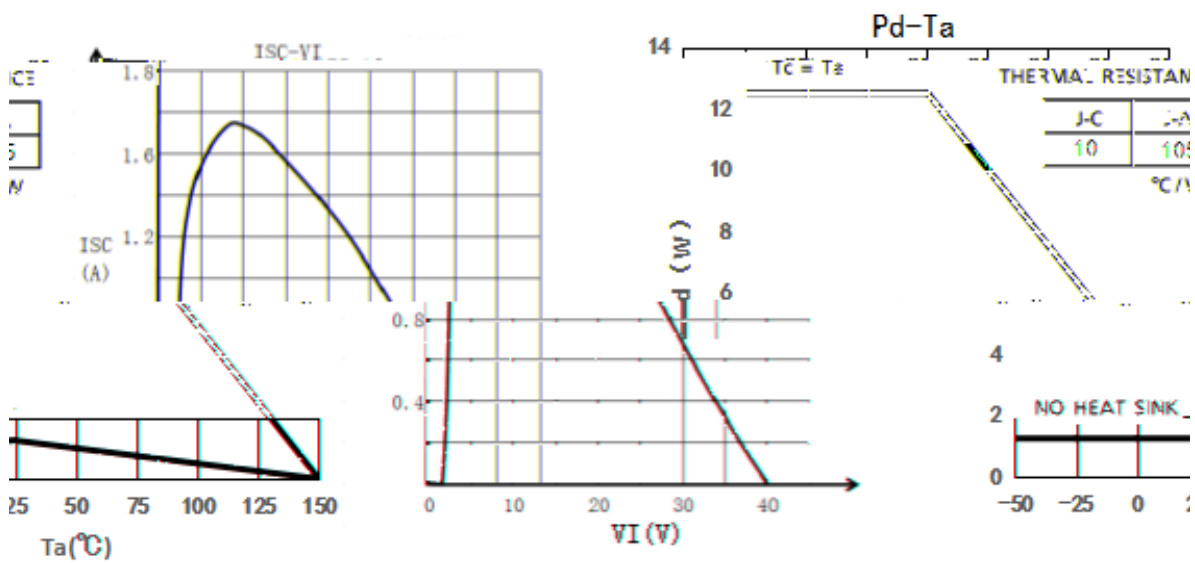

/ Package Dimensions

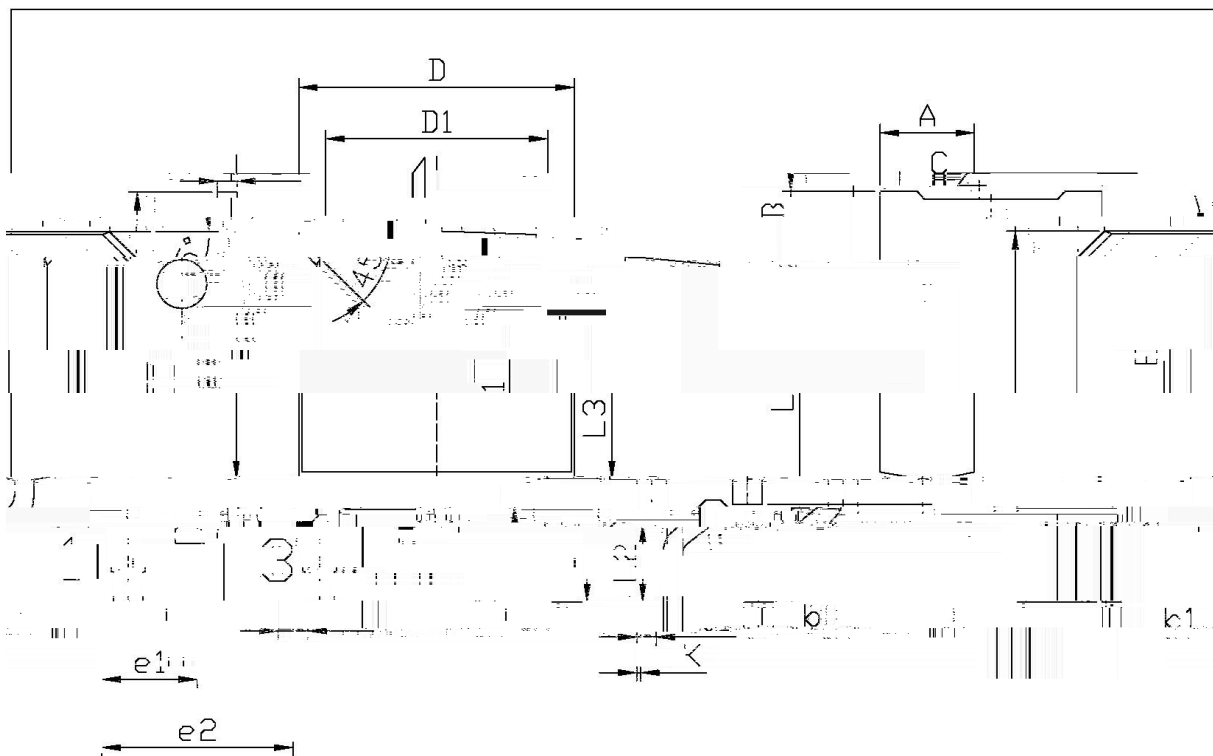


单位: mm


Symbol	Dimensions In Millimeters	Symbol	Dimensions In Millimeters
	5.95		6.25
	2.24		2.34
	0.60		0.65
	0.45		0.55
	0.55		0.45
	0.60		0.90
	0.00		0.10
	2.20		2.40
	0.95		1.25
	9.85		10.35
	1.2		1.70
	6.45		6.75
	5.10		5.50

$$T_0 \equiv 25\%$$

/ Marking Instructions

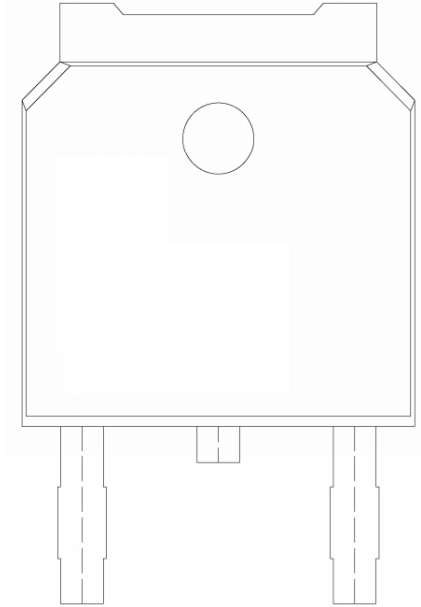

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

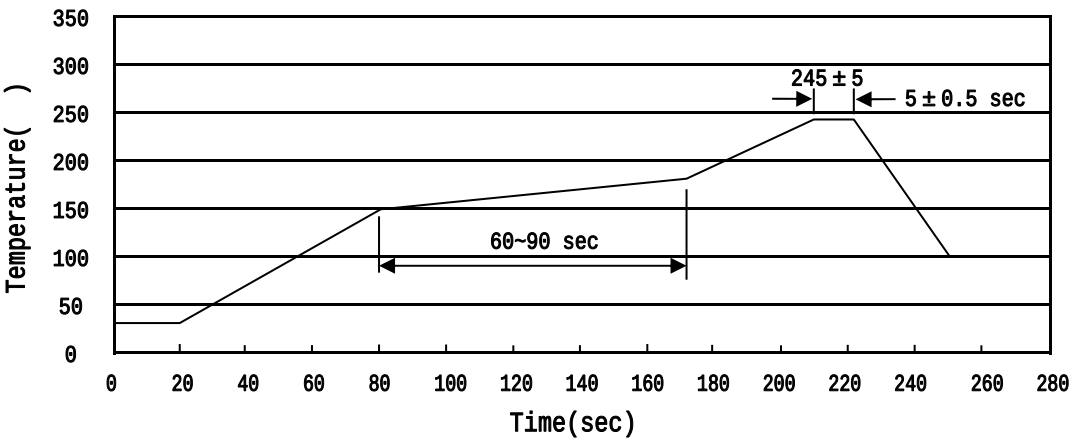

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box

78D15A



DATA SHEET

/ Notices