

/ Descriptions


/ Features

433V~4333V


4D

/ Applications

/ Equivalent Circuit



/ Pinning

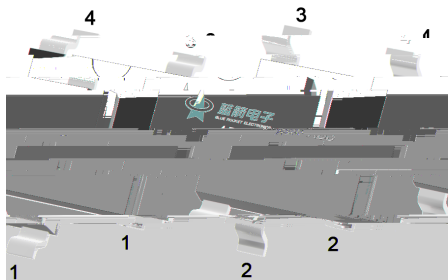

PIN	DESCRIPTION
1	Input Pin (~)
2	Input Pin (~)
3	Output Anode (+)
4	Output Cathode (-)



/ Marking

ABS1-10~ABS10-10



DATA SHEET

/ Electrical Characteristic Curve

Fig.1 Average Rectified Output Current Derating Curve



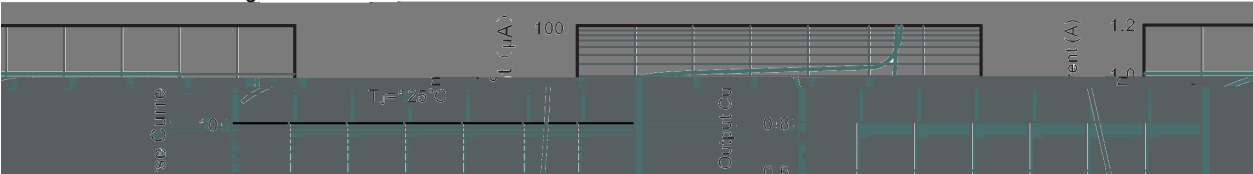


Fig.2 Typical Reverse Characteristics

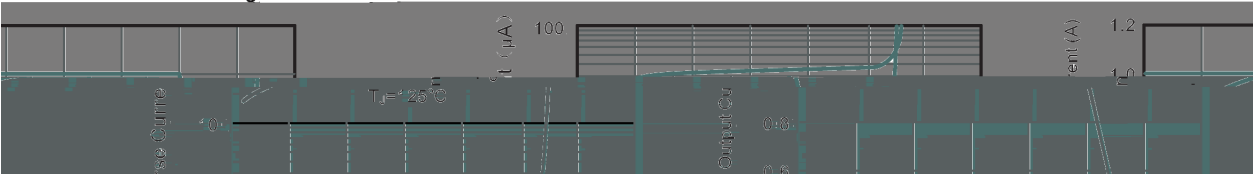

/ Package Dimensions

ABS/LBF

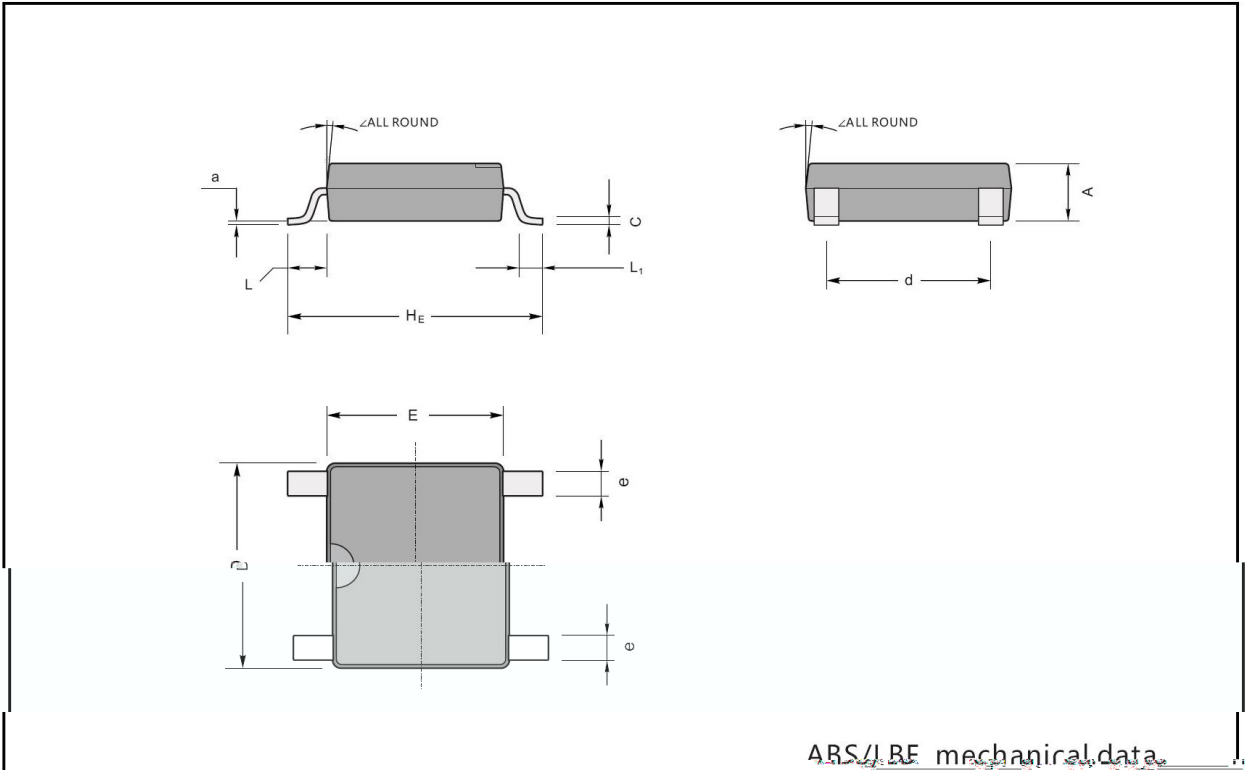


ABS/LBF mechanical data


UNIT	A	C	D	E	H _E	d	e	L	L ₁	a	∠

/ Marking Instructions

Marking

Type number	Marking code
ABS1-10	10T1
ABS2-10	10T2
ABS4-10	10T4
ABS6-10	10T6
ABS8-10	10T8
ABS10-10	10T10
	


/ Marking Instructions

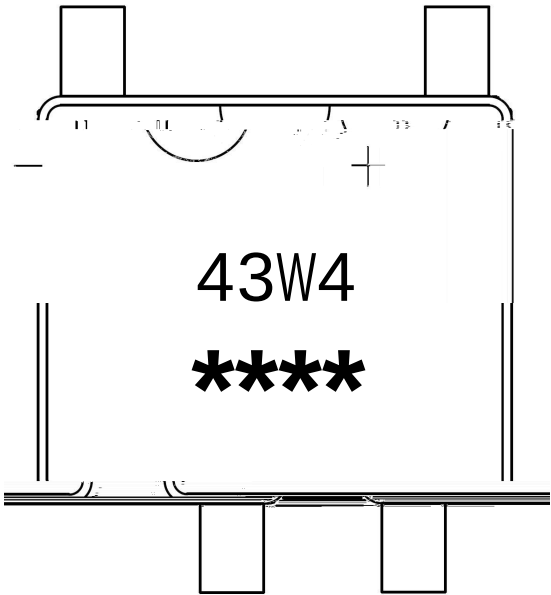

ω

ω

() /

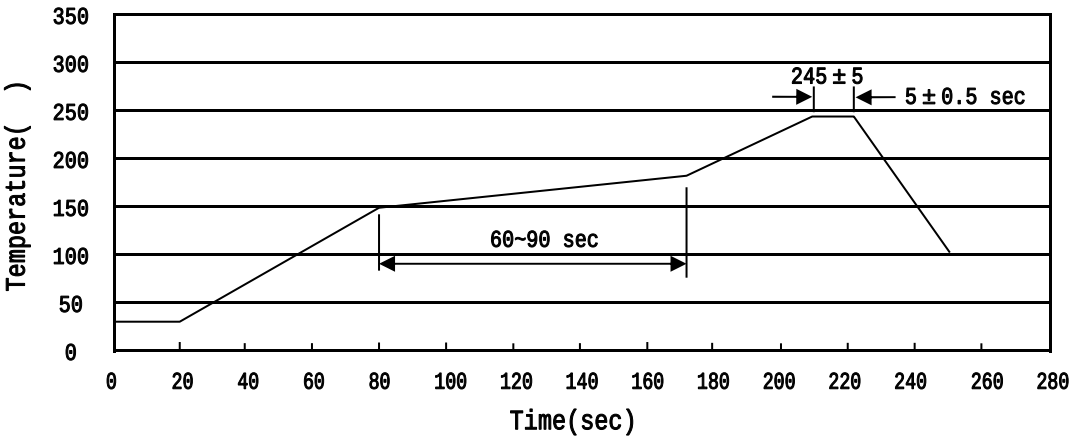

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

/ Notices