


/ Descriptions


/ Features

/ Applications


/ Equivalent Circuit



/ Pinning



| PIN | DESCRIPTION        |
|-----|--------------------|
| 1   | Input Pin ( ~ )    |
| 2   | Output Anode (+)   |
| 3   | Output Cathode (-) |
| 4   | Output Pin ( ~ )   |



/ Marking


/ Absolute Maximum Ratings(Ta=25 – )

|  |   |  |  |  |  |  |  |  |
|--|---|--|--|--|--|--|--|--|
|  |   |  |  |  |  |  |  |  |
|  |   |  |  |  |  |  |  |  |
|  |   |  |  |  |  |  |  |  |
|  |   |  |  |  |  |  |  |  |
|  |   |  |  |  |  |  |  |  |
|  |   |  |  |  |  |  |  |  |
|  |   |  |  |  |  |  |  |  |
|  | θ |  |  |  |  |  |  |  |
|  | θ |  |  |  |  |  |  |  |
|  |   |  |  |  |  |  |  |  |

/ Electrical Characteristics(Ta=25 – )


|  |  |  |  |   |
|--|--|--|--|---|
|  |  |  |  |   |
|  |  |  |  |   |
|  |  |  |  |   |
|  |  |  |  | μ |
|  |  |  |  |   |

/ Electrical Characteristic Curve

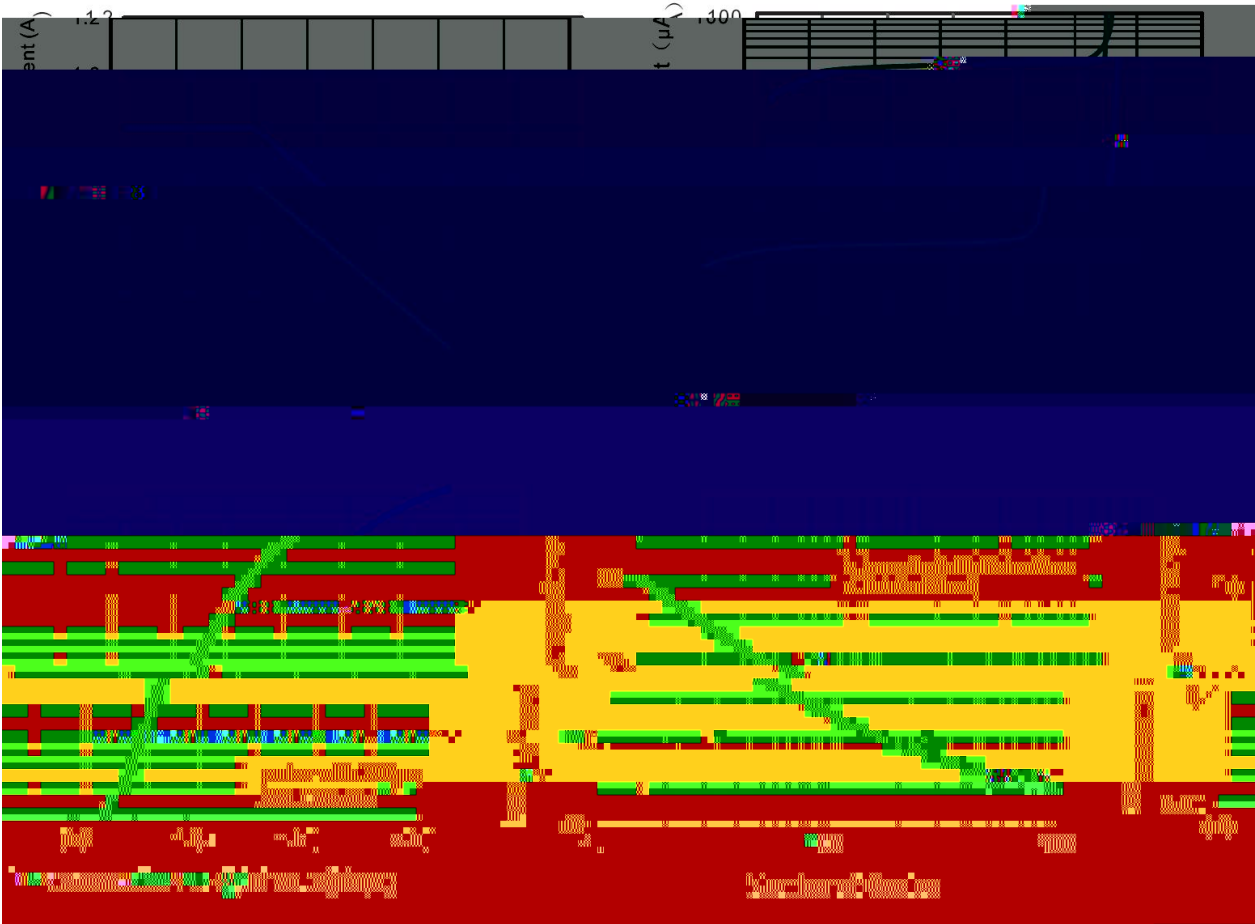

/ Package Dimensions


ABS/LBF

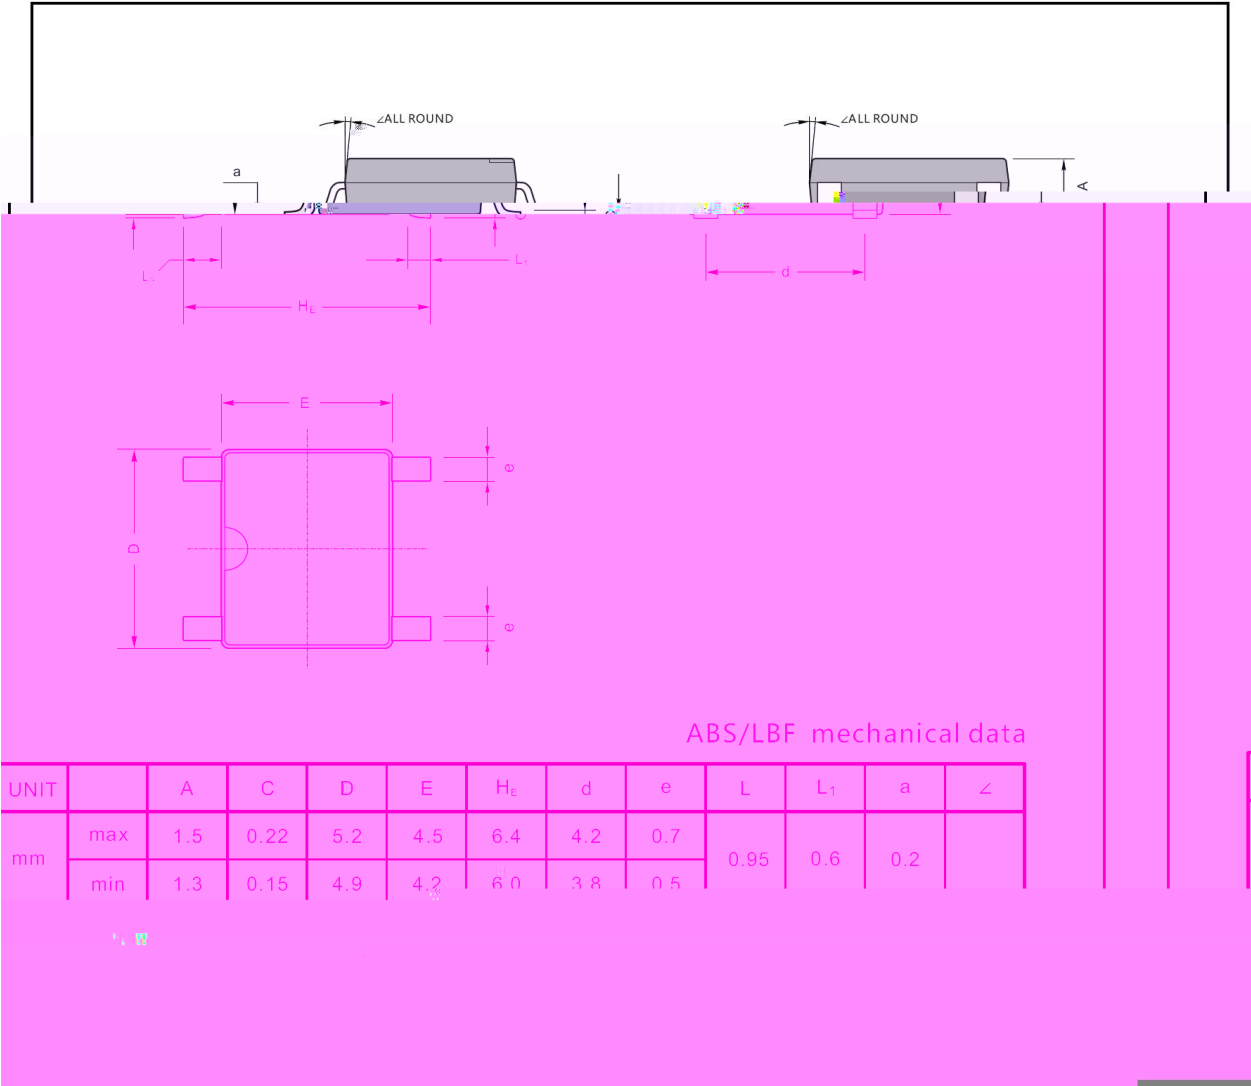


/ Marking Instructions

Marking


| Type number | Marking code |
|-------------|--------------|
| ABS1        | ABS1         |
| ABS2        | ABS2         |
| ABS4        | ABS4         |
| ABS6        | ABS6         |
| ABS8        | ABS8         |
| ABS10       | ABS10        |

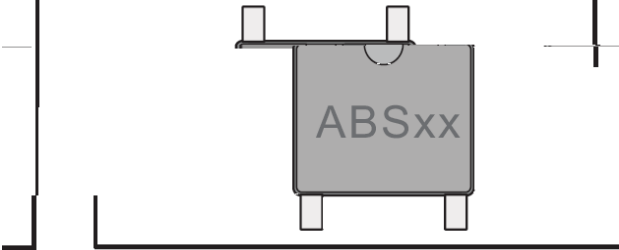

/ Marking Instructions

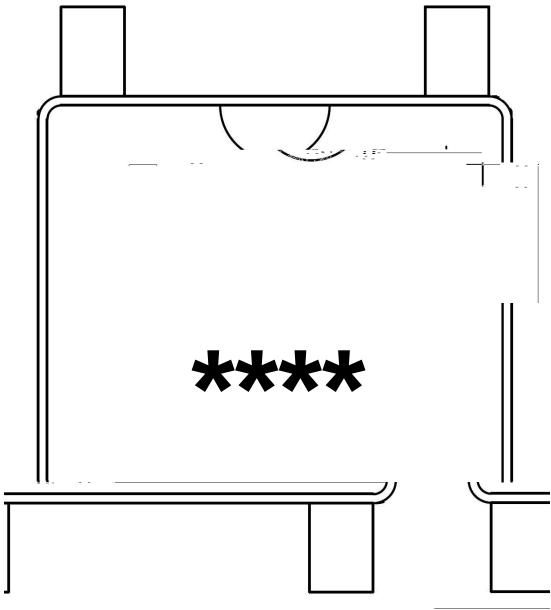

( ) / Wh p shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0lueh,

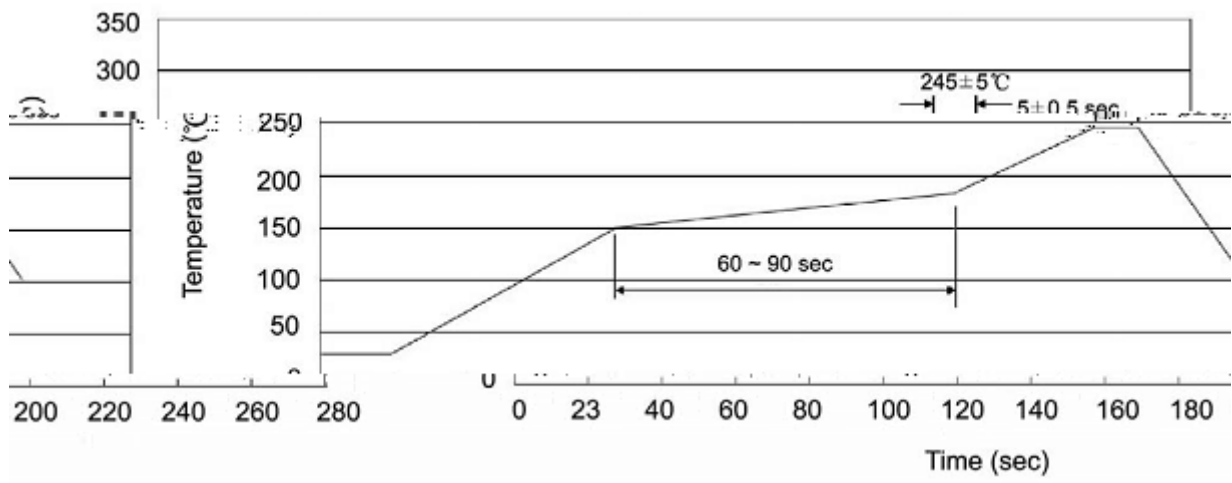

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

|         | Units/Reel | Reels/Inner Box | Units/Inner Box | Inner Boxes/Outer Box | Units/Outer Box | Reel | Inner Box | Outer Box |
|---------|------------|-----------------|-----------------|-----------------------|-----------------|------|-----------|-----------|
| ABS/LBF | /          | /               | /               | /                     | /               |      |           |           |

/ Notices