

/ Descriptions

SOT-223

PNP



Silicon PNP transistor in a SOT-223 Plastic Package.

/ Features

High current,Low voltage.

/ Applications

Medium Power Switching or Amplification Applications .

/ Equivalent Circuit**/ Pinning**

PIN1 Base

PIN 2 Collector

PIN 3 Emitter

/ h_{FE} Classifications & Marking

h_{FE} Classifications Symbol	10	16
h_{FE} Range	63~160	100~250

/ Absolute Maximum Ratings(Ta=25)

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-100	V
Collector to Emitter Voltage	V_{CEO}	-80	V
Emitter to Base Voltage	V_{EBO}	-5.0	V
Collector Current - Continuous	I_C	-1.0	A
Peak Pulse Collector Current	I_{CM}	-2.0	A
Continuous Base Current	I_B	-100	mA
Peak Pulse Base Current	I_{BM}	-200	mA
Power Dissipation	P_D	2.0	W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	62	W
Thermal Resistance, Junction to Leads	$R_{\theta JL}$	19.4	W
Operating and Storage Temperature Range	$T_j T_{stg}$	-65~150	


/ Electrical Characteristics(Ta=25)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector to Base Breakdown Voltage	V_{CBO}	$I_C=-100\mu A$ $I_E=0$	-100			V
Collector to Emitter Breakdown Voltage	$*V_{CEO}$	$I_C=-10mA$ $I_B=0$	-80			V
Emitter to Base Breakdown Voltage	V_{EBO}	$I_E=-10\mu A$ $I_C=0$	-5.0			V
Collector Cut-Off Current	I_{CBO}	$V_{CB}=-100V$ $I_E=0$			-0.1	μA
		$V_{CB}=-100V$ $T_A=150$			-20	μA
Emitter Base Cut-Off Current	I_{EBO}	$V_{EB}=-5.0V$ $I_C=0$			-20	nA
DC Current Gain	$h_{FE(1)}$	$V_{CE}=-2.0V$ $I_C=-5mA$	25			
	$h_{FE(2)}$	$V_{CE}=-2.0V$ $I_C=-150mA$	40		250	
	$h_{FE(3)}$	$V_{CE}=-2.0V$ $I_C=-500mA$	25			
Collector to Emitter Saturation Voltage*	$*V_{CE(sat)}$	$I_C=-500mA$ $I_B=-50mA$			-0.5	V
Base to Emitter Saturation Voltage*	$*V_{BE(sat)}$	$I_C=-500mA$ $V_{CE}=-2.0V$			-1.0	V
Transition Frequency	f_T	$V_{CE}=-10V$ $I_C=-50mA$ $f=1.0MHz$	150			MHz
Collector output capacitance	C_{ob}	$V_{CB}=-10V$ $f=1.0MHz$			25	pF

*Pulse width $\leq 300\mu s$, Duty cycle $\leq 2\%$.

* ≤ 300 $\leq 2\mu s$


/ Electrical Characteristic Curve

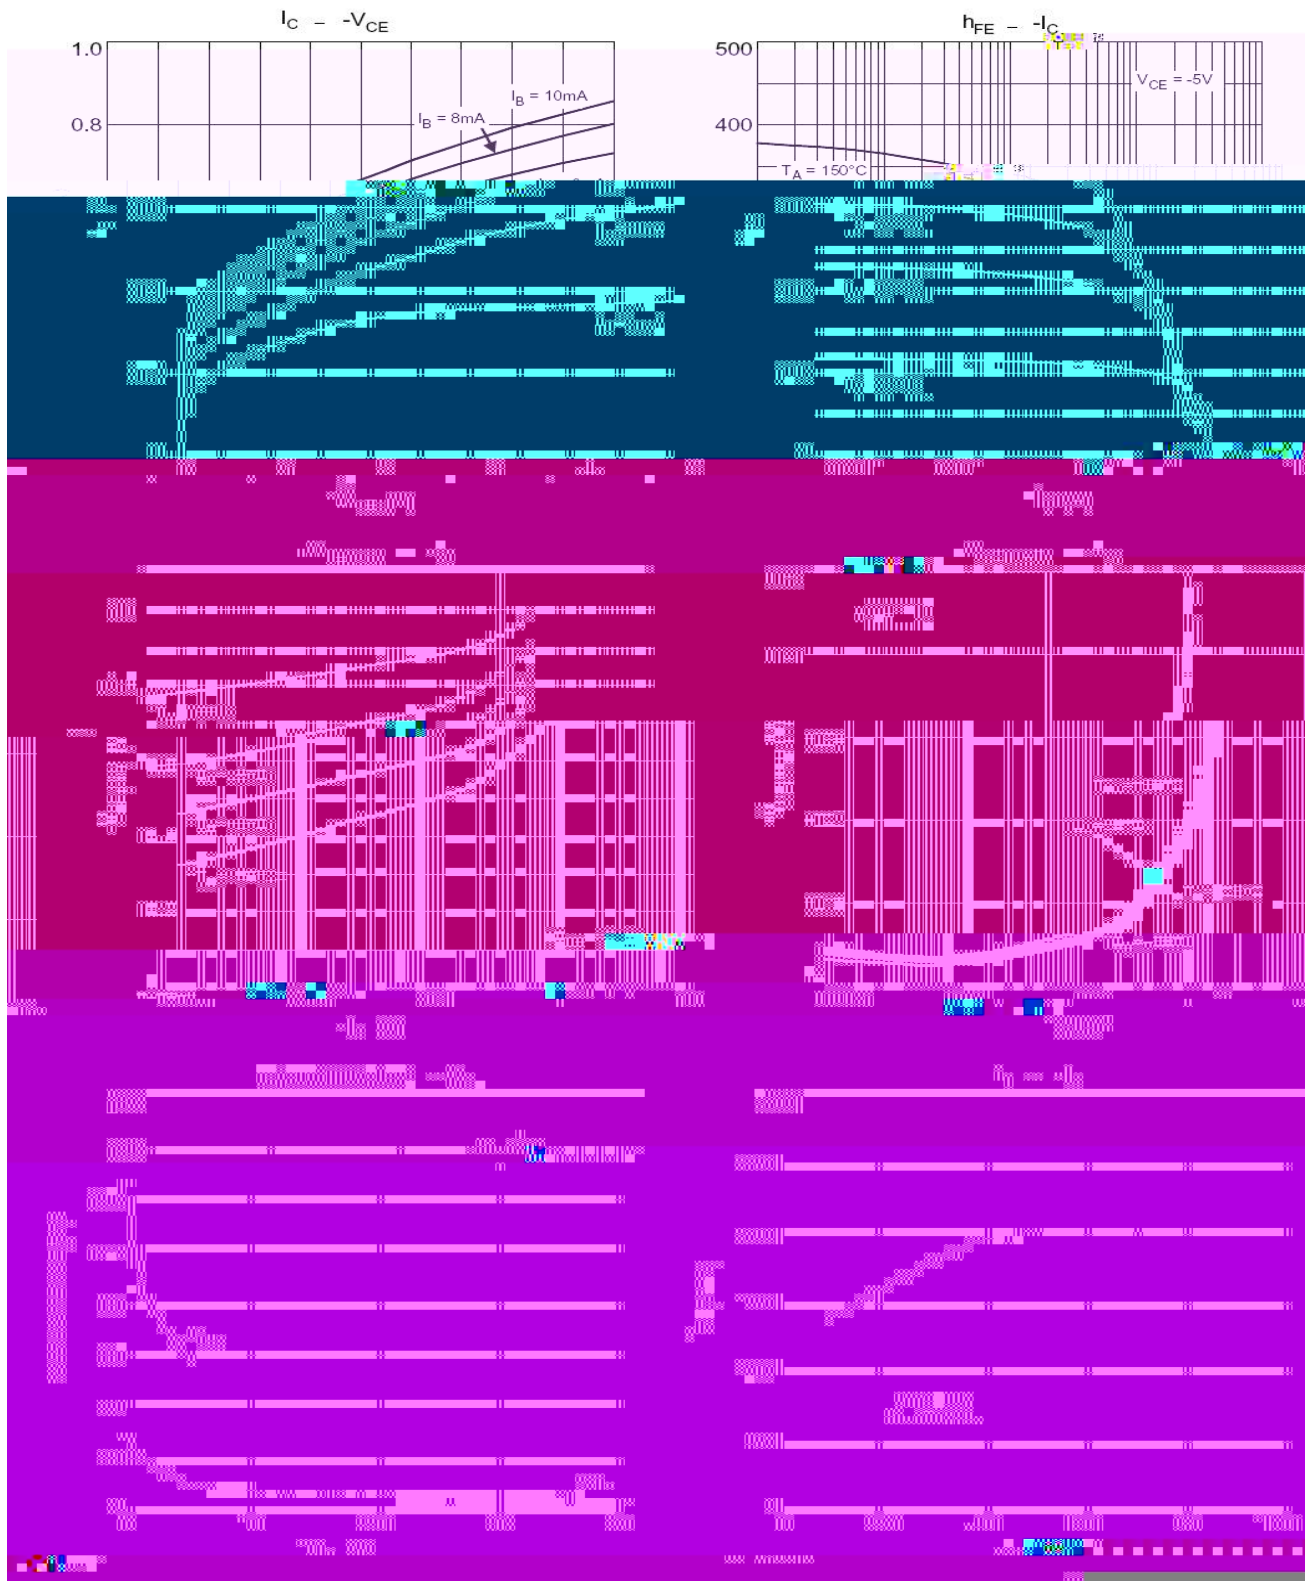


/ Package Dimensions

SOT-223

单位：mm

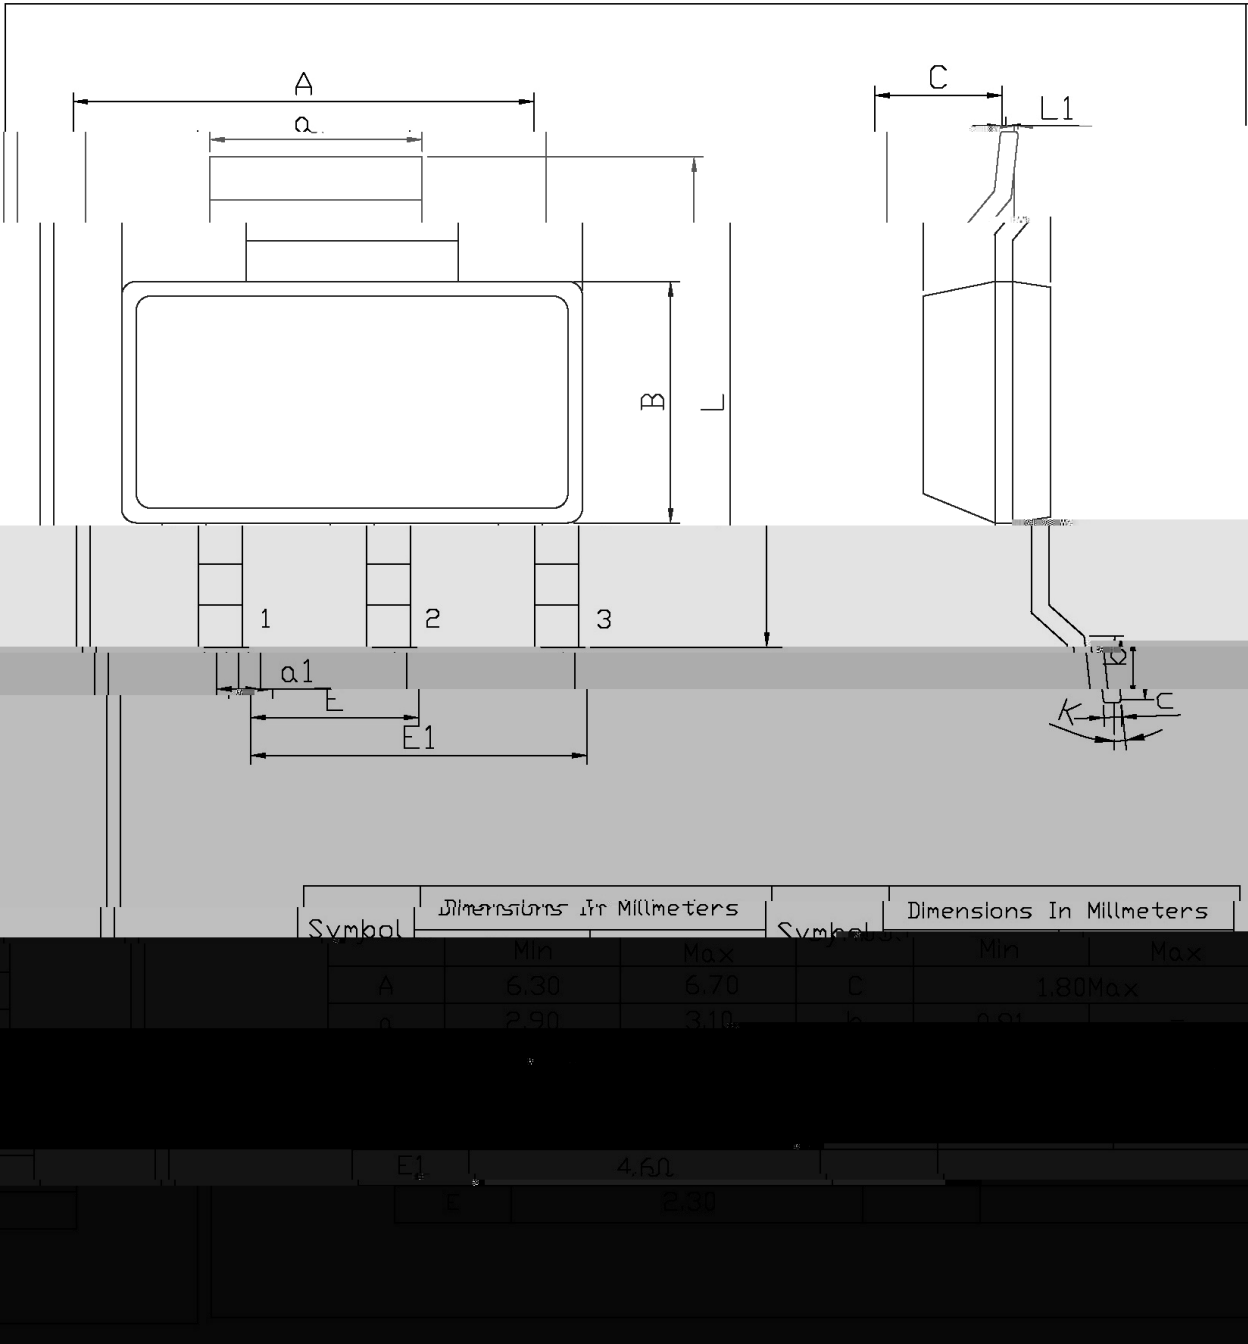

/ Marking Instructions

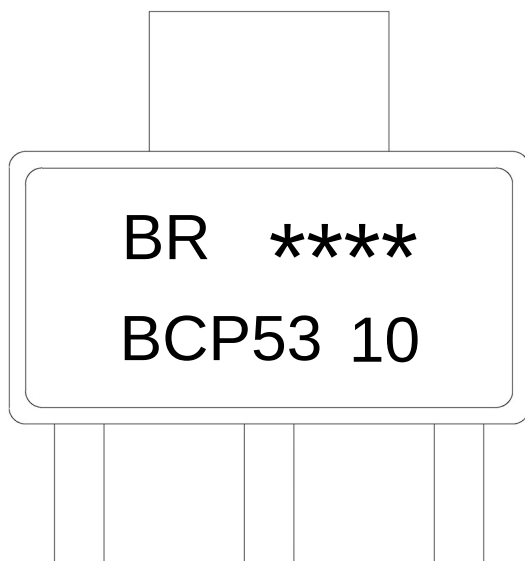

BR

BCP53

10

h_{FE} 分

Note:


BR: Company Code.

BCP53: Product Type.

10: h_{FE} Classifications Symbol

****: Lot No. Code, code change with Lot No.

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

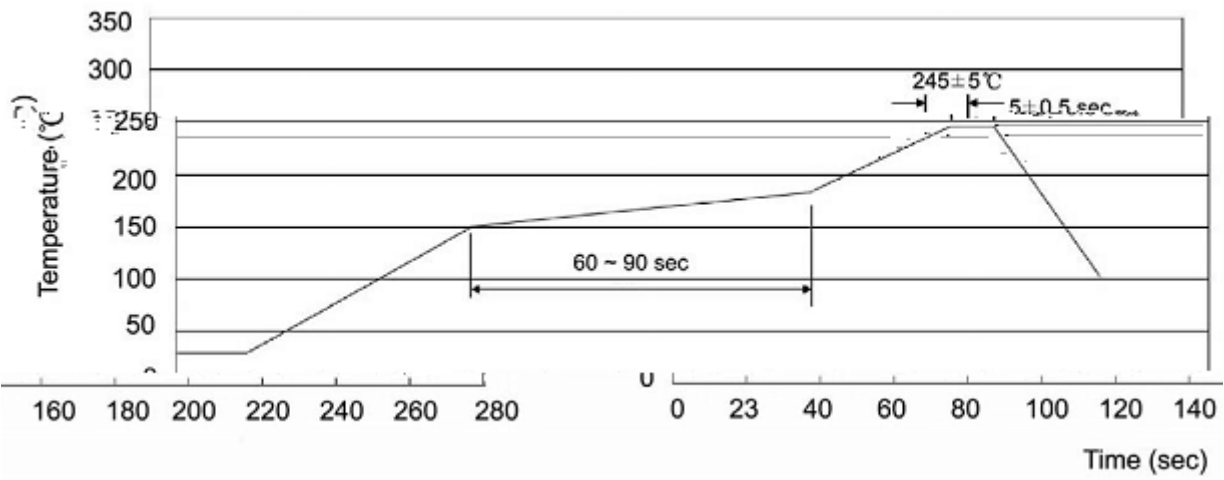

Note:

- 1

25 150

60 90sec;
- 2

245±5

5±0.5sec;
- 3

2 10 /sec.
- 1.Preheating:25~150

, Time:60~90sec.
- 2.Peak Temp.:245±5

, Duration:5±0.5sec.
3. Cooling Speed: 2~10

/sec.

/ Resistance to Soldering Heat Test Conditions

260±5 10±1 sec. Temp:260±5 Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱
						"		

/ Notices