


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning




/ h_{FE} Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)


/ Electrical Characteristics(Ta=25)

/ Electrical Characteristics(Ta=25)

/ Electrical Characteristic Curve

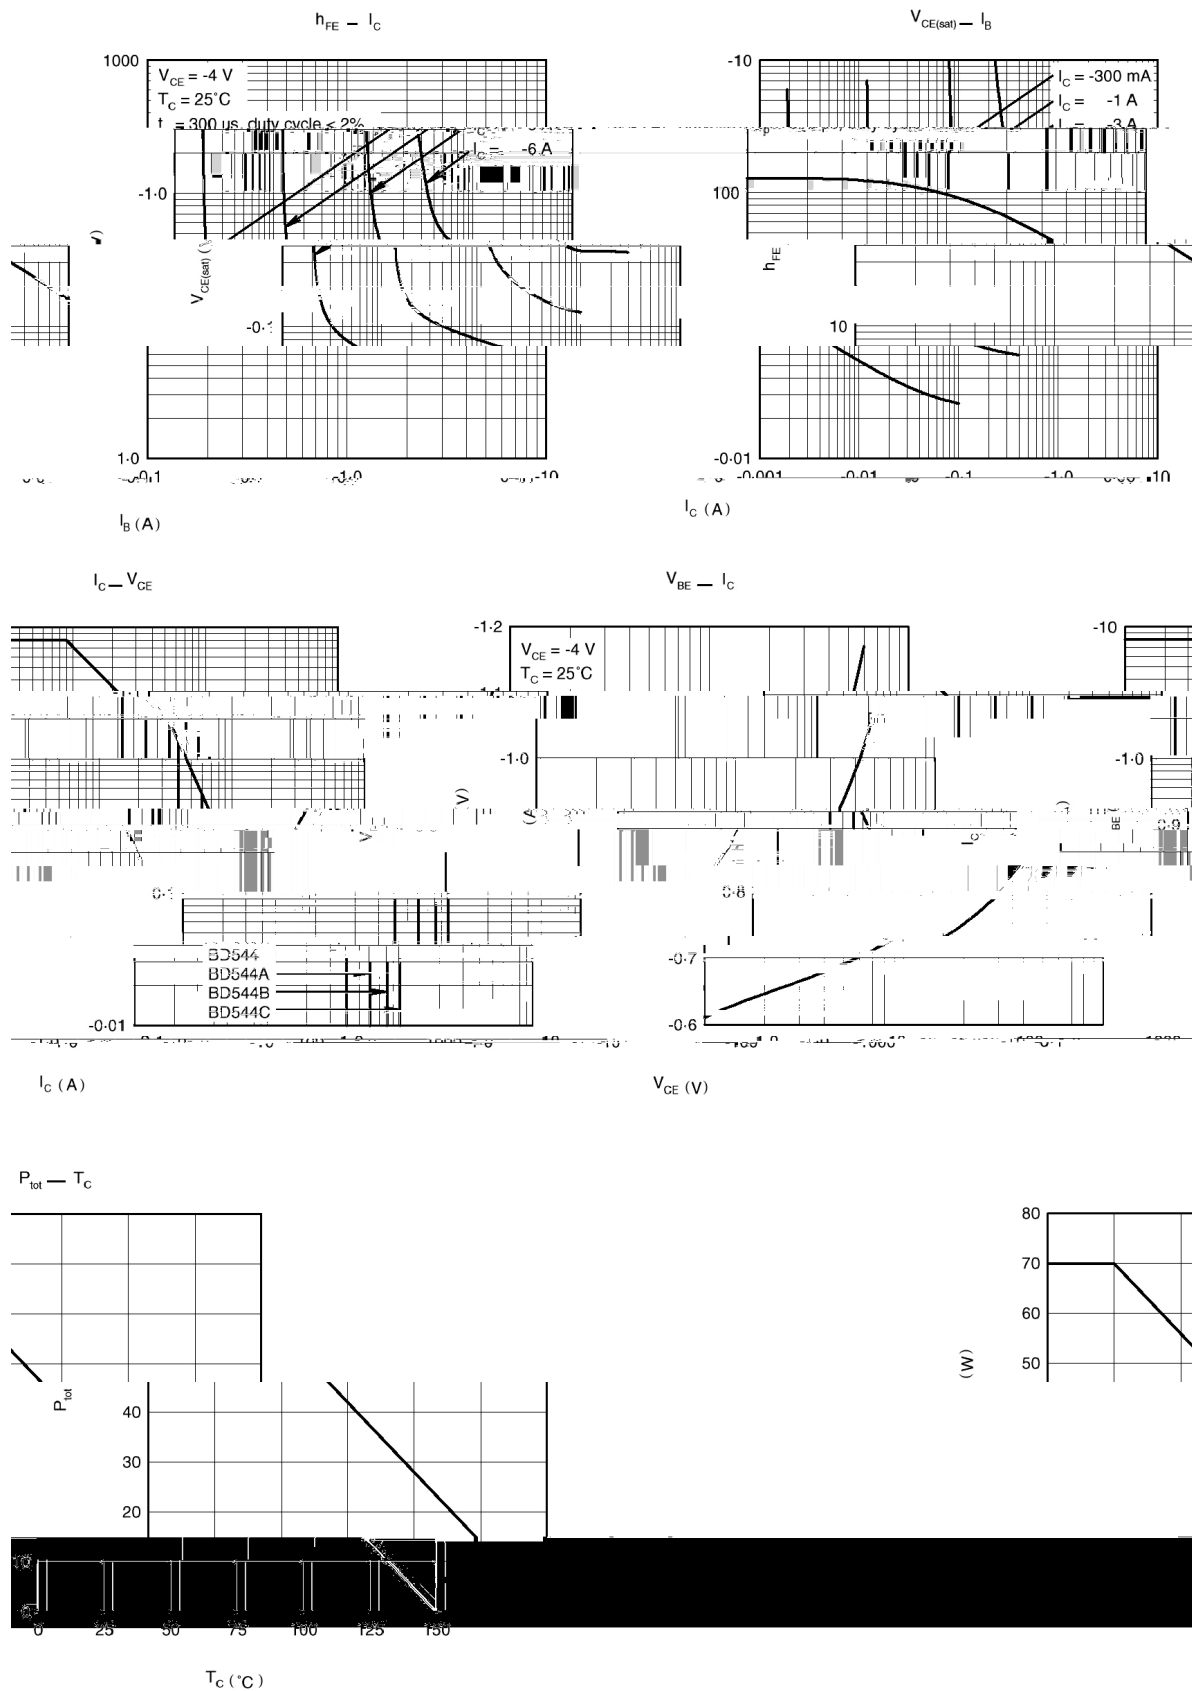


/ Package Dimensions

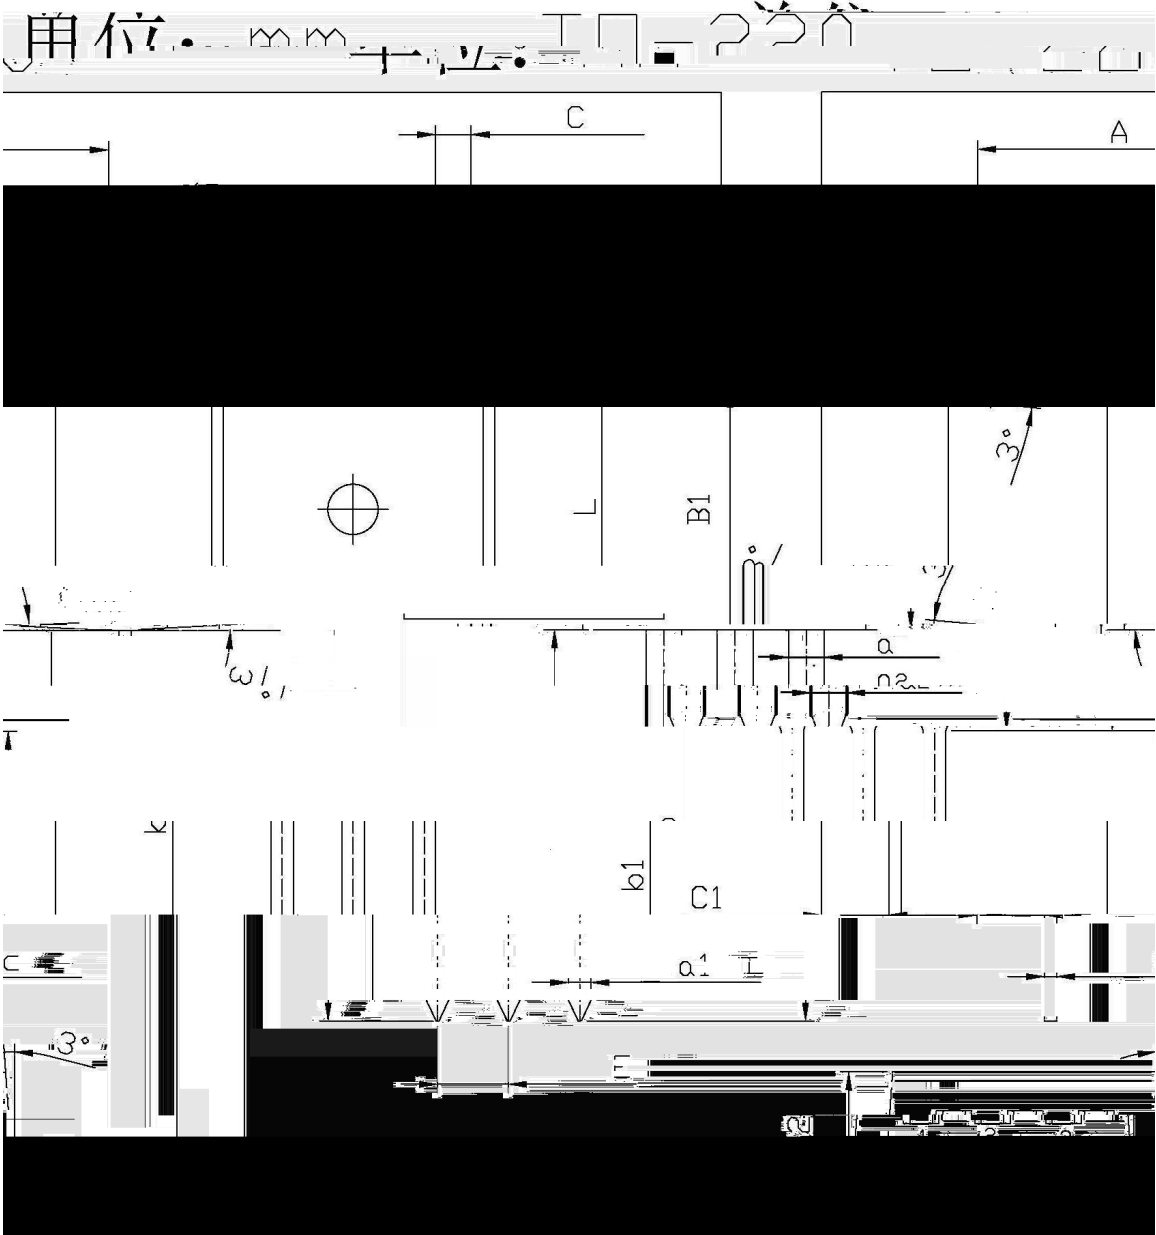

Dimensions in millimeters			Dimensions in millimeters		
Symbol	Min	Max	Symbol	Min	Max
A	9.8	10.2	C	1.2	1.4
B1	3.5	3.6	C1	6.3	6.7
B	16.1	16.5	a1	9.4	9.6
B1	9.0	9.4	b1	2.2	2.4
C	1.2	1.4	a	0.5	0.6
C1	6.3	6.7	b	0.5	0.6
a1	9.4	9.6	a	0.5	0.6
b1	2.2	2.4	b	0.5	0.6
a	0.5	0.6	a	0.5	0.6
b	0.5	0.6	b	0.5	0.6

/ Marking Instructions

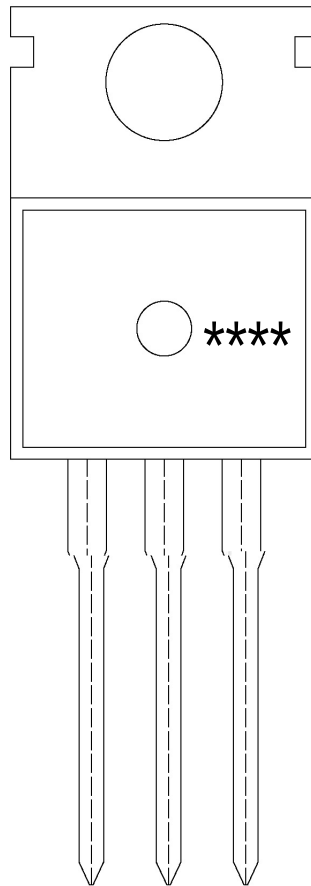

() / Temperature Profile for Dip Soldering(Pb-Free)

