




BRAD6555AMF

SOT23-6

PWM



AC-DC

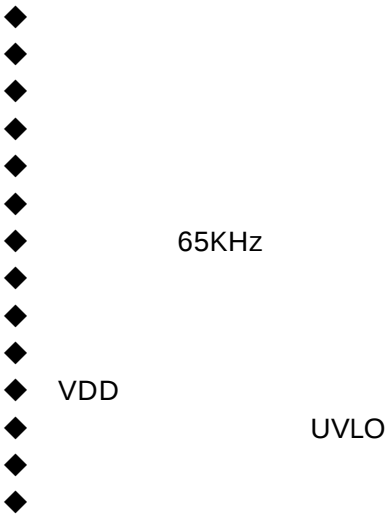

Pin Number

Pin Name

Pin Description

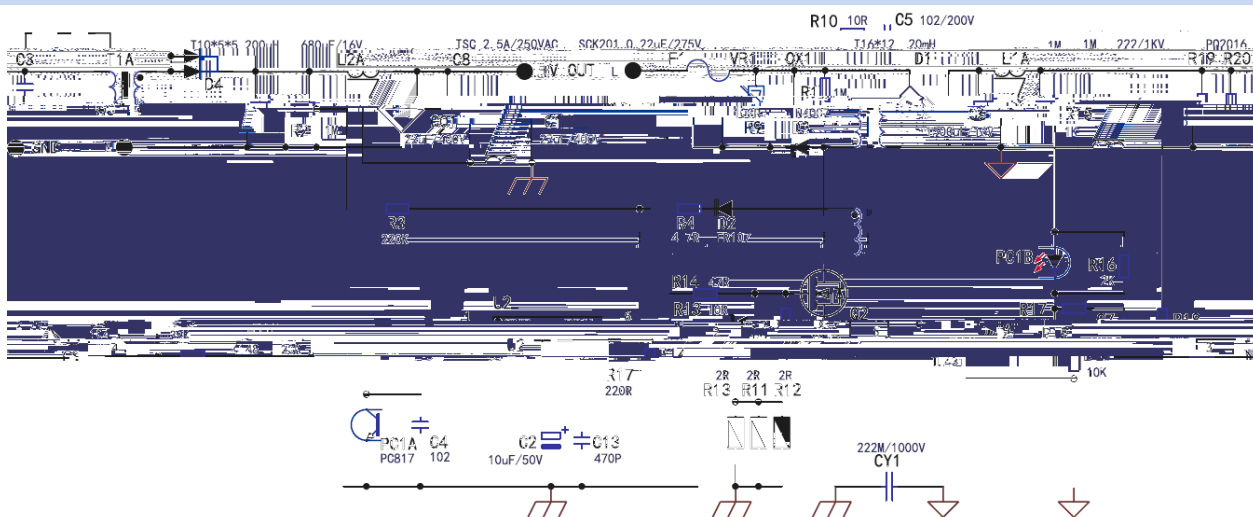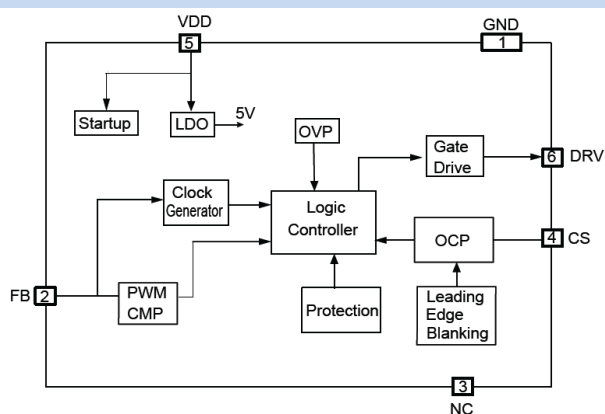


		°C



Δ						




BRAD6555AMF		PWM			
BRAD6555AMF					
VDD		VDD			
BRAD6555AMF					
65KHz				PFM	
BRAD6555AMF					
BRAD6555AMF	SOT23-6				
		Level6		Eur2.0	
					VDD
VDD					
4ms					
BRAD6555AMF					
EMI					
BRAD6555AMF	CCM				
6%				65KHz.	EMI
BRAD6555AMF					
			FB		
					FB
4.2V	60ms,				
BRAD6555AMF					
BRAD6555AMF					

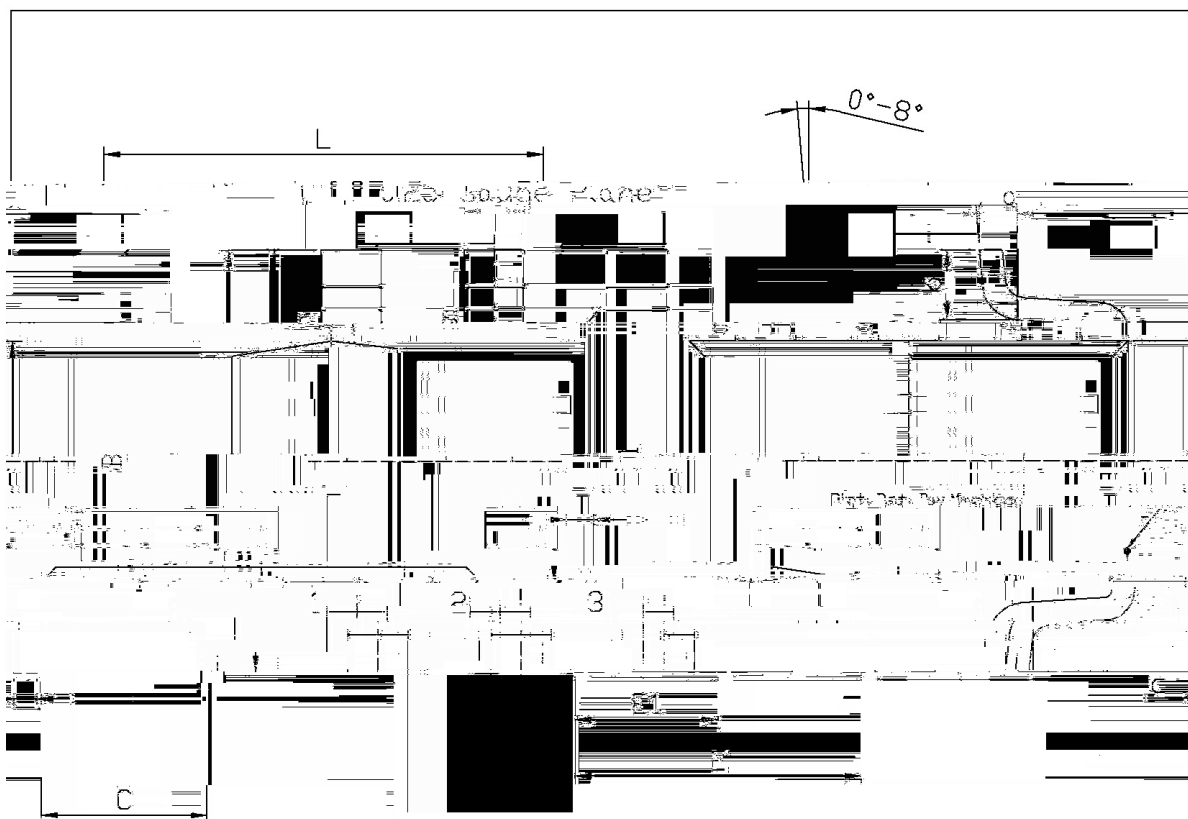

Unit: mm		Dimensions in Millimeters				Dimensions	
In Millimeters	Symbol	Min	Max	In Millimeters	Symbol	Min	Max
12		3.02	3.30	12		2.6	2.9
10		1.70	1.90	10	B	1.5	1.7
10		1.30	1.50	10	C	0.9	1.1
10		3.00	3.30	10	L1	2.6	2.9
10		1.80	2.00	10		2.6	2.9


SOT23-6

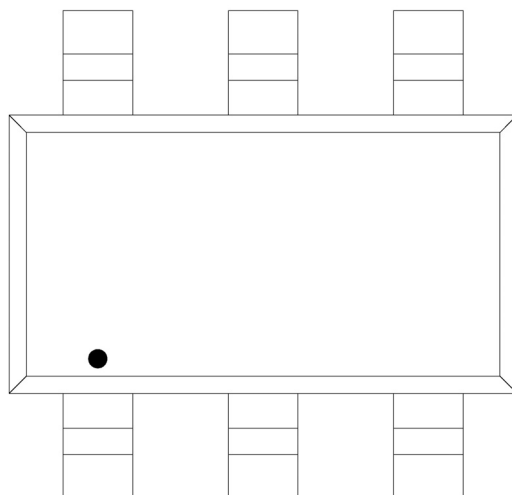

6555A

6555A

Temperature Profile for IR Reflow Soldering(Pb-Free)

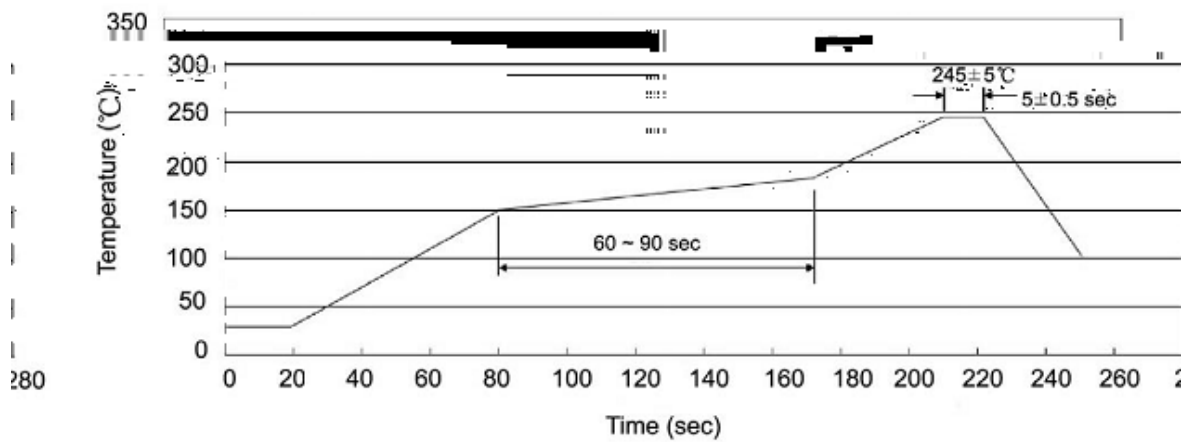

±

±

±

±

±

±

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
SOT23-5/6	3,000	10	30,000	4	120,000	7 × 8	210×205×205	445×230×435