


/ Descriptions

/ Features

/ Applications

AC/DC

/ Equivalent Circuit



/ Pinning









/ h_{FE} Classifications & Marking


	℃		
	℃		
	℃		

--	--	--	--	--	--	--

/ Electrical Characteristic Curve

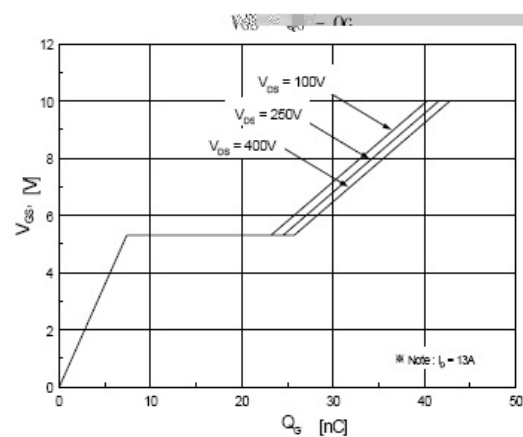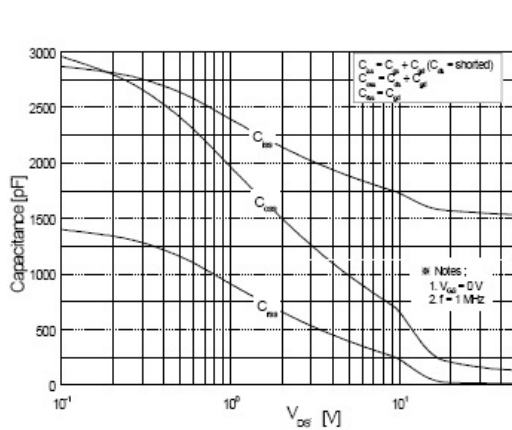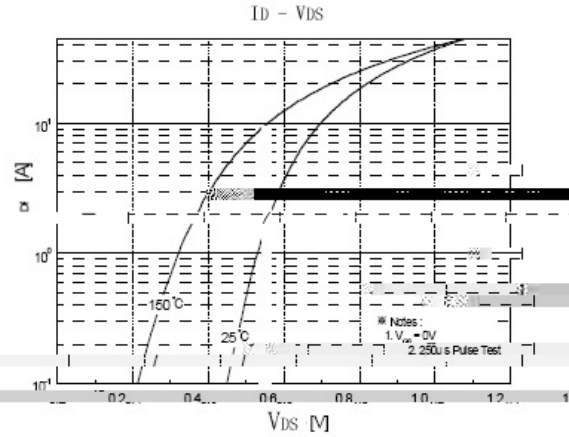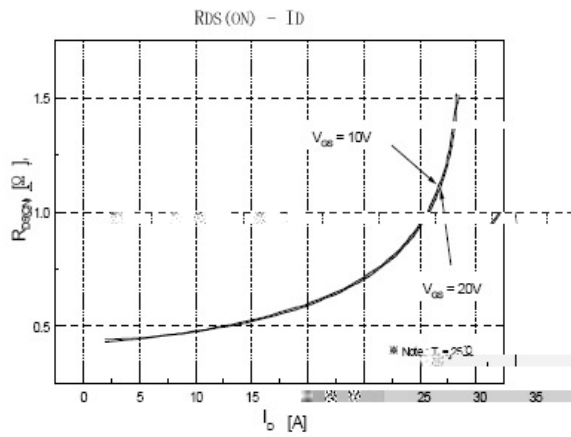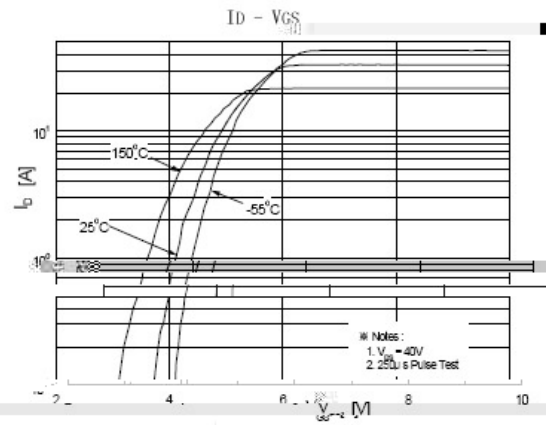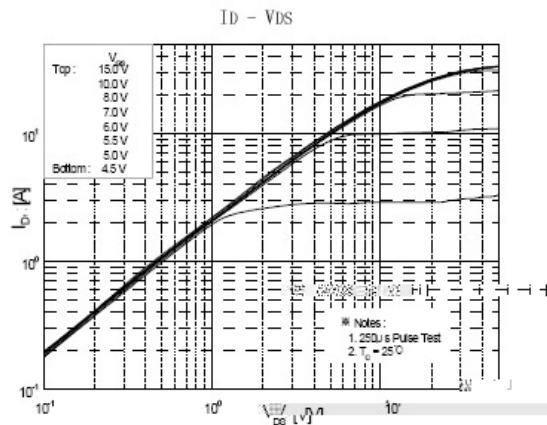


/ Package Dimensions

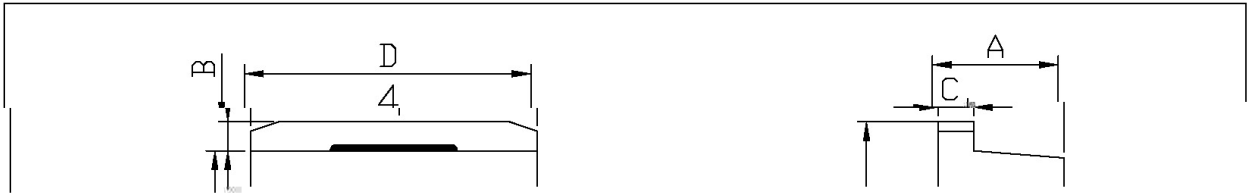

单位: mm						
Symbol	Dimensions in Millimeters		Symbol	Dimensions in Millimeters		
	Min	Max		Min	Max	
A	4.30	4.70	FL	0.00	0.40	
B	1.00	1.40	e1	2.34	2.74	
b	0.70	0.90	e2	4.88	5.28	
b1	1.15	1.35	L1	15.00	16.00	
b2	0.40	0.60	L2	2.24	2.84	
C	1.20	1.40	L3	1.20	1.60	
D	9.80	10.20				


TQ-263

/ Marking Instructions

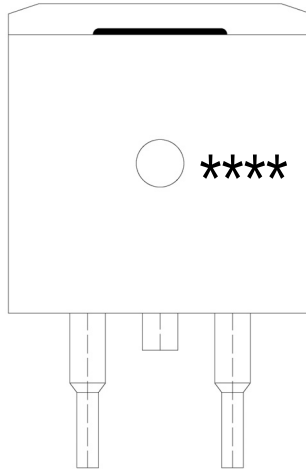

13N50

() /

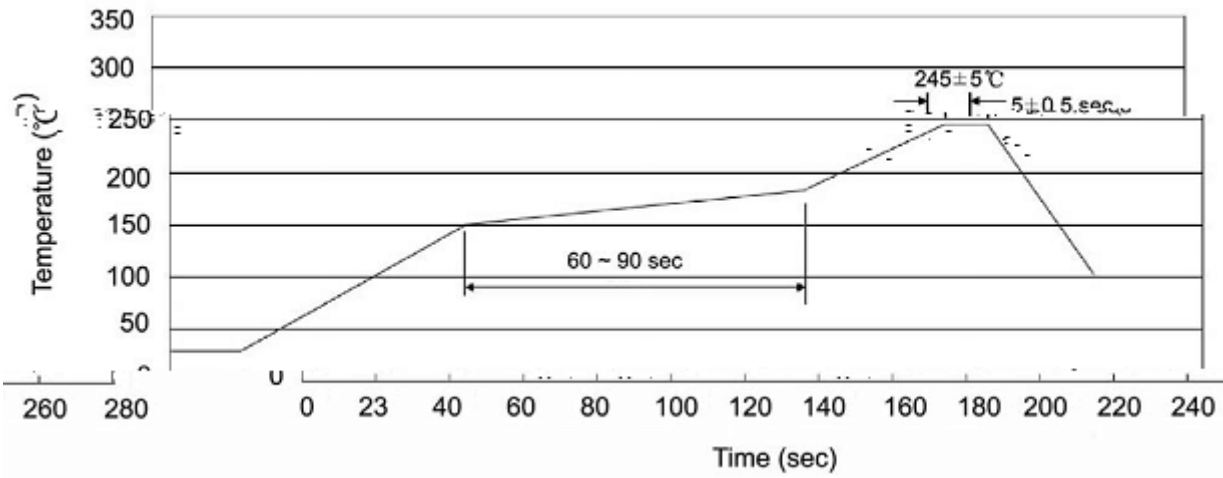

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
TO-263	800	1	800	5	4,000	13" ×24	360×360×50	385×257×392

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box
TO-263	50	20	1,000	5	5,000	532×33×7.0	555×164×50	575×290×180

/ Notices