


/ Descriptions

TO-220


/ Features

/ Applications

/ Equivalent Circuit









/ Pinning

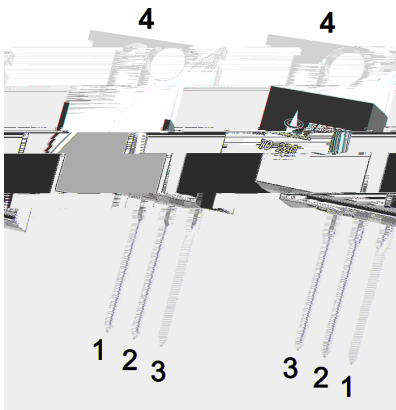


/ Marking

≤ °C			
°C			
°C			
		~	
		~	

/ Electrical Characteristic Curve

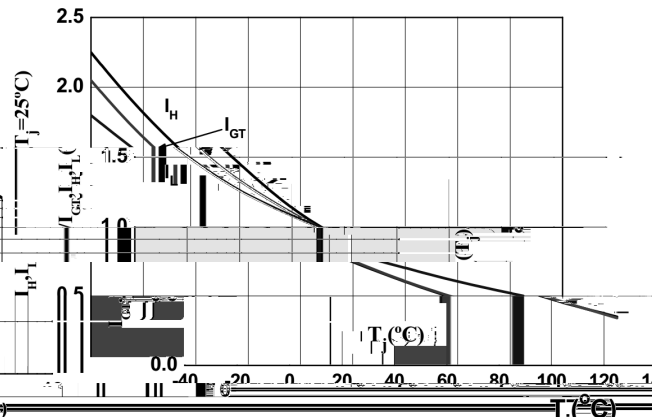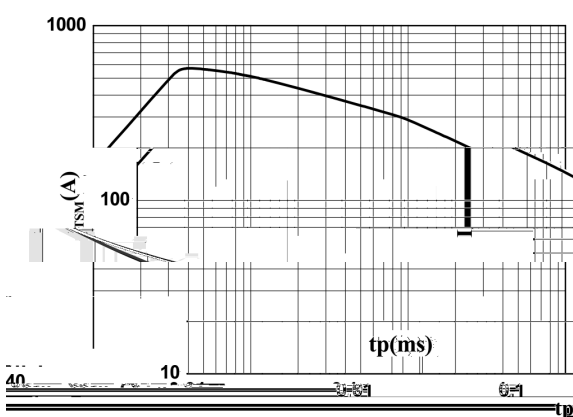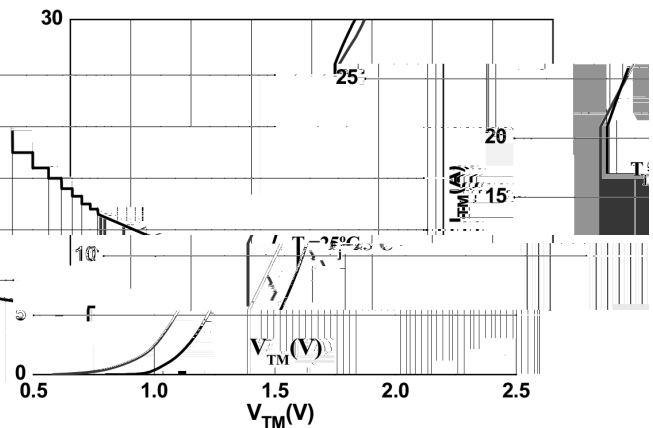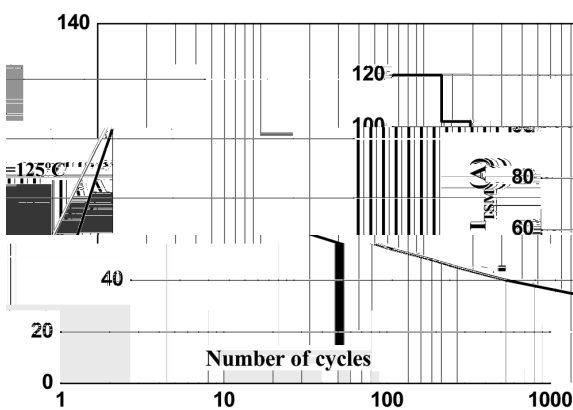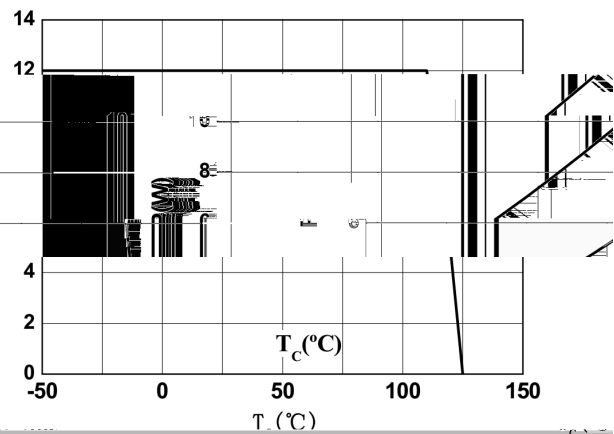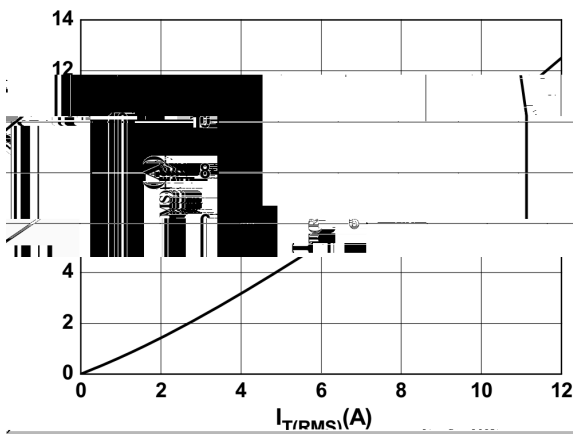


/ Package Dimensions

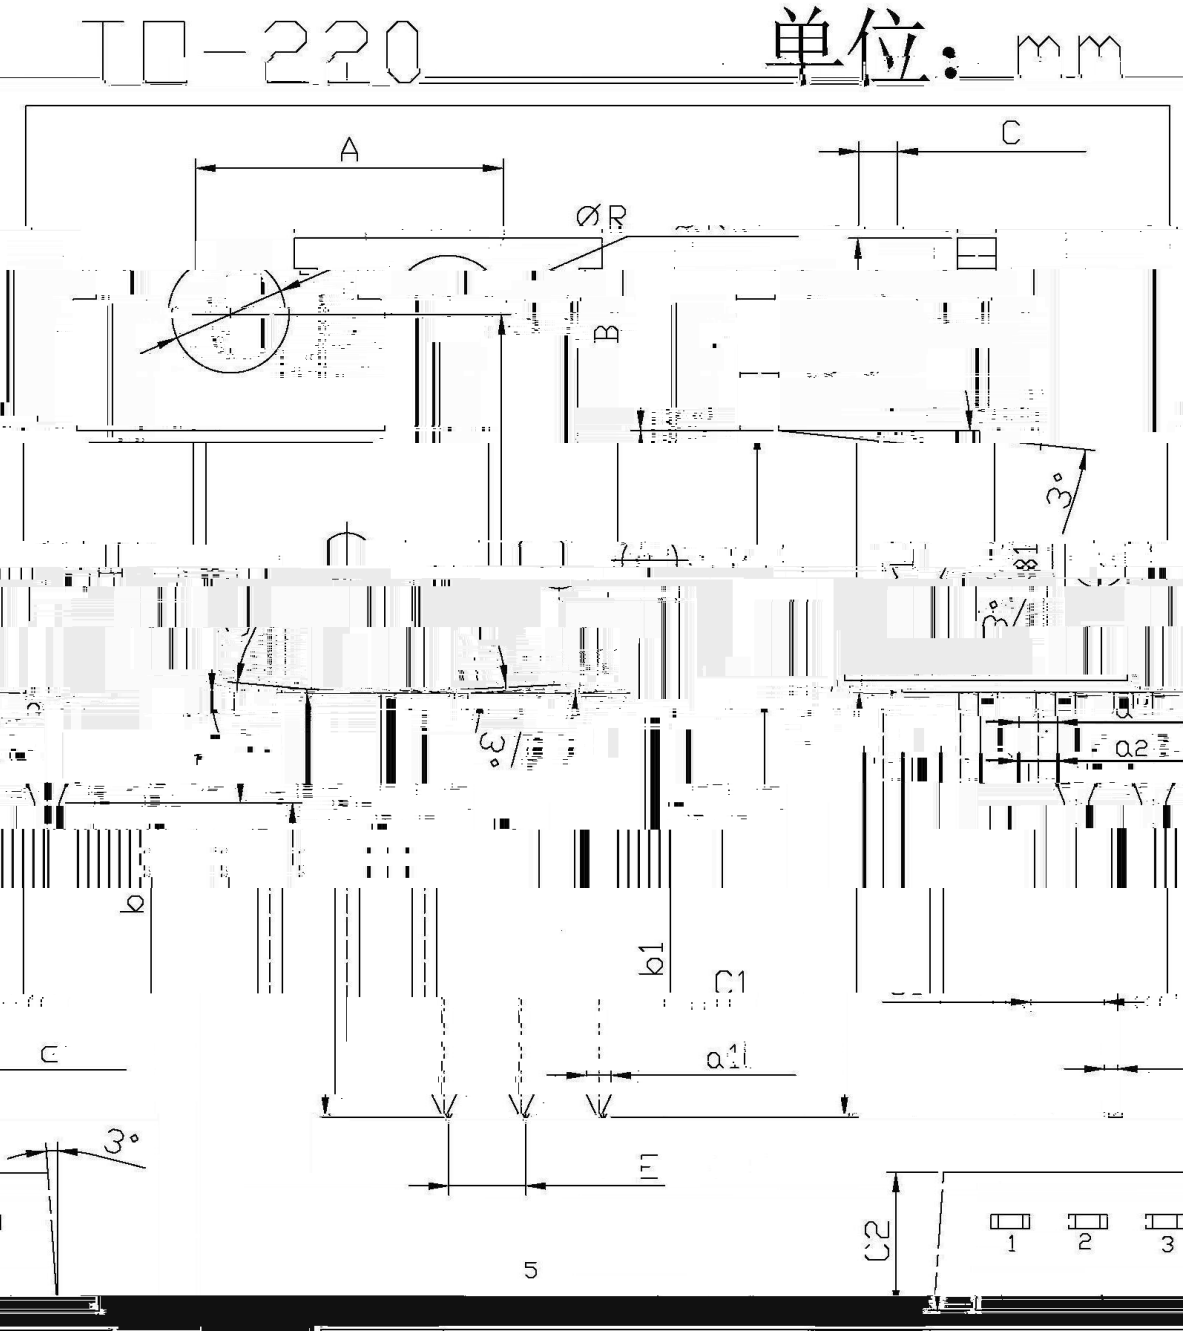

Dimensions In Millimeters			Dimensions In Millimeters		
Symbol	Min	Max	Symbol	Min	Max
A	9.8	10.2	C	1.2	1.4
R	3.56	3.64	B	6.3	6.7
L	15.7	16.1	B1	9.0	9.4
b	12.6	13.0	C1	2.2	2.6

/ Marking Instructions

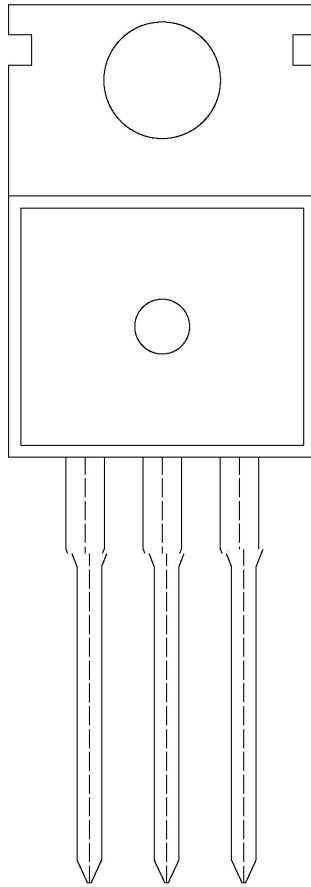

BR

BS08065

 $\pm$ $\pm$

	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box