




/ Pinning

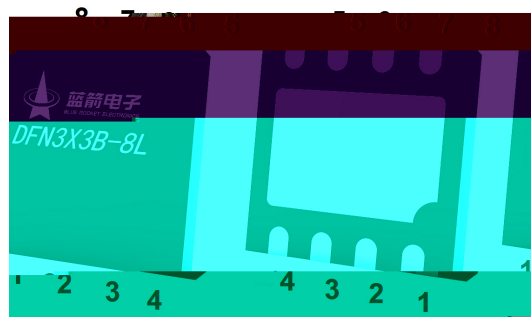

PIN Num.	Symbol	Function

/ Absolute Maximum Ratings(Ta=25℃)

PARAMETER	SYMBOL	RATINGS	UNITS

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Power Suplly						
Charging Current Setting						

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Indicator Pin Status CHRG/STDBY						

BRCL4058NZR-4.2



DATA SHEET



/ Function description


◆

◆

◆

◆

/ Package Dimensions

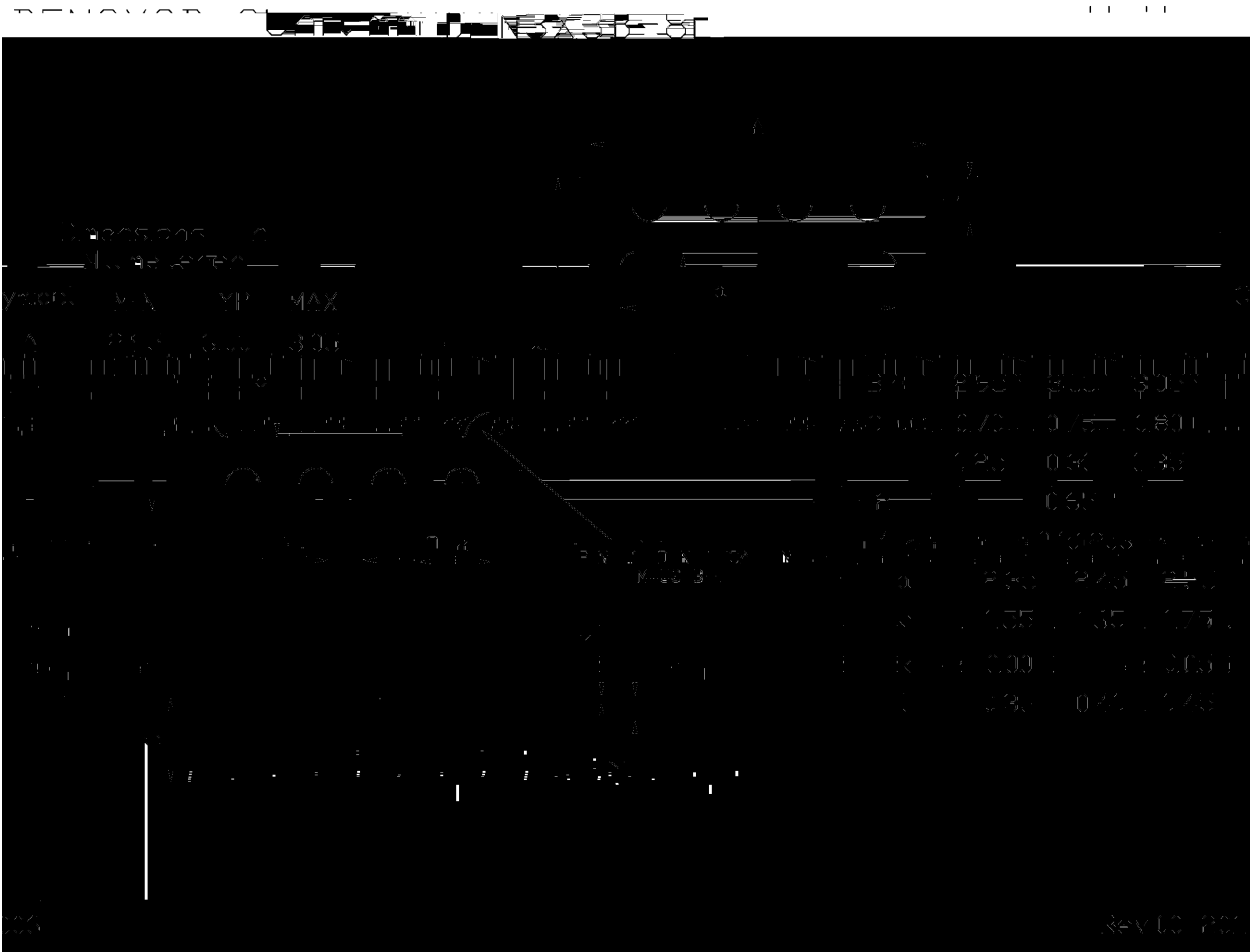

/ Marking Instructions

