

BRCM24C32SC

BRCM24C32SC SOP-8 32 Kbit I²C

	1.7V	2.5~5.5V	1Mhz	1.7~2.5V
	400Khz			
CMOS		400uA	1.6mA	
it		;		β

/ Pinning

Pin	Name	Type	Description
1	E0	Input	
2	E1	Input	
3	E2	Input	
4	GND	Ground	
5	SDA	I/O	/
6	SCL	Input	
7	WCB	Input	
8	VCC	Power	

/ Marking

/ Absolute Maximum Ratings(Ta=25)


			mA
			V

/ Reliability Characteristic

/ AC Electrical Characteristics(Unless otherwise specified, Vcc = 1.7V to 5.5V, TA = -40°C to 85

		≤			≤ ≤			

≤

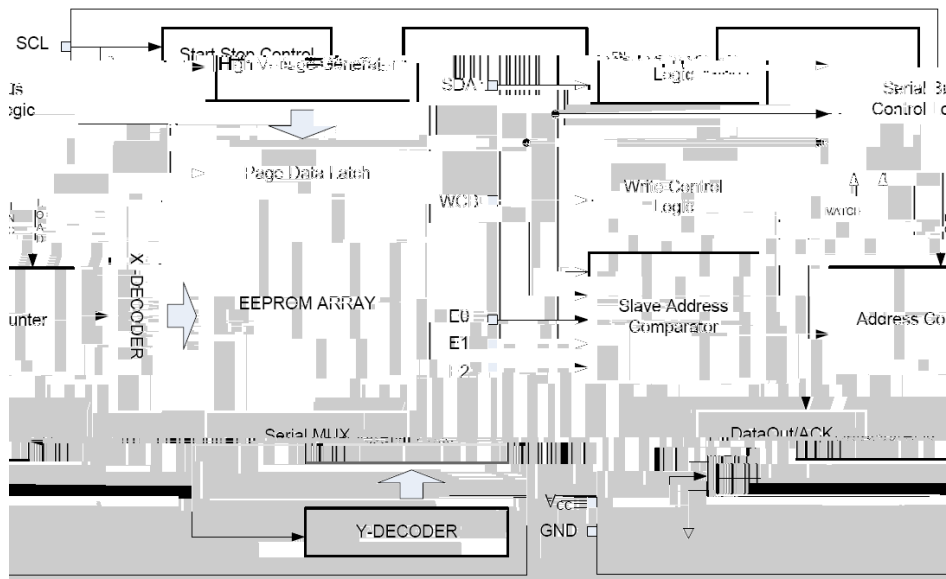

/ Functional Description

/ Data Input

SDA

SDA

SCL

(1) SCL

SDA

(1)

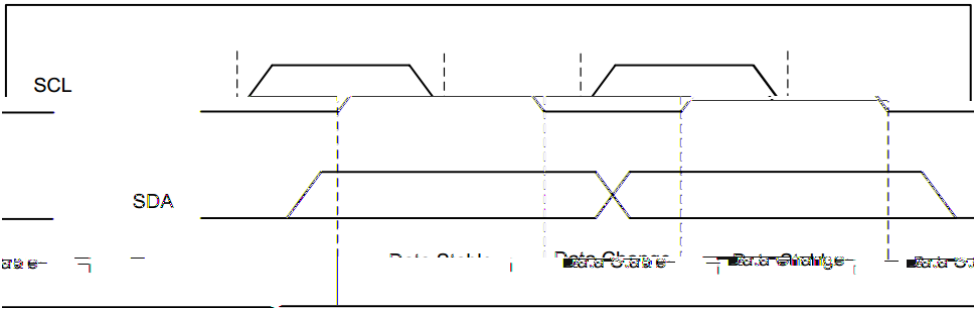


Figure 1 Data Validity

/ Start Condition

SCL

SDA

2

/ Stop Condition

SCL

SDA

BRCM24C32SC

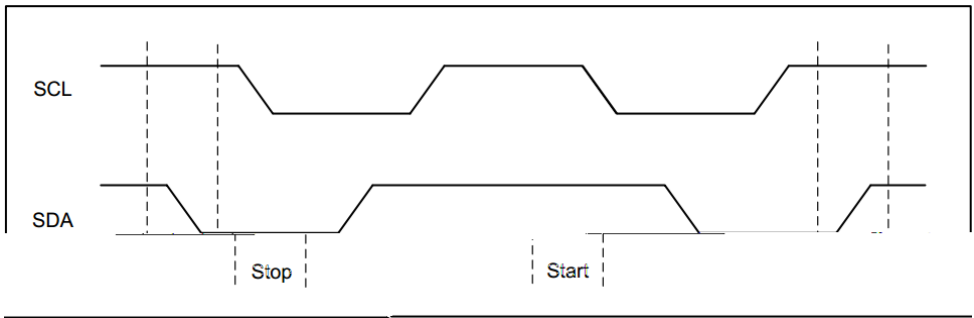


Figure 2 Start and Stop Definition

ACK / Acknowledge

ACK


BRCM24C32SC

BRCM24C32SC


" 0 "

9

/ Functional Description

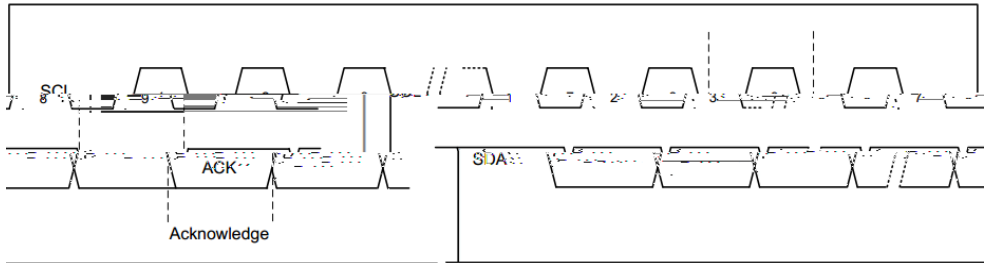

/ Functional Description

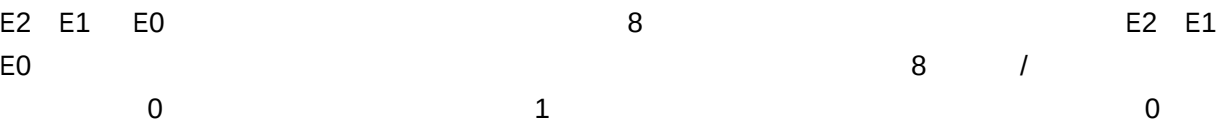

/ Data Security

BRCM24C32SC WCB Vcc

/ Byte Write



/ Functional Description

/ Acknowledge Polling

BRCM24C32SC

BRCM24C32SC



DATA SHEET

/ Functional Description

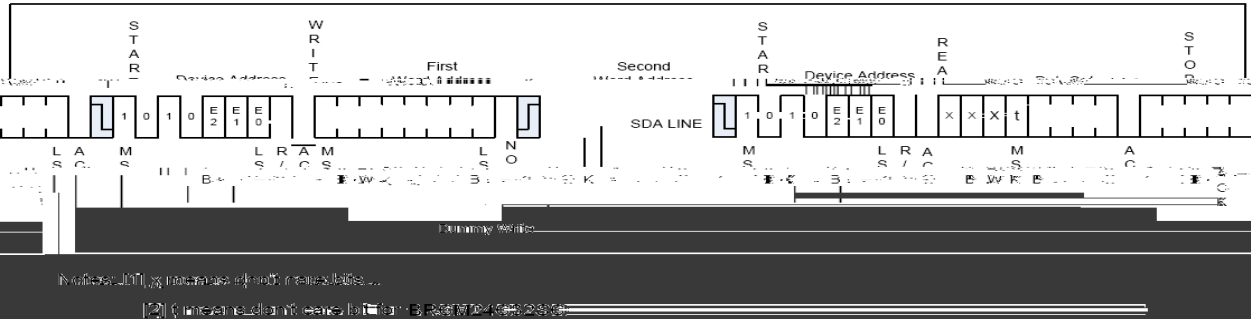


Figure 8 Random Address Read

/ Sequential Read

BRCM24C32SC

“ 0 ”

9

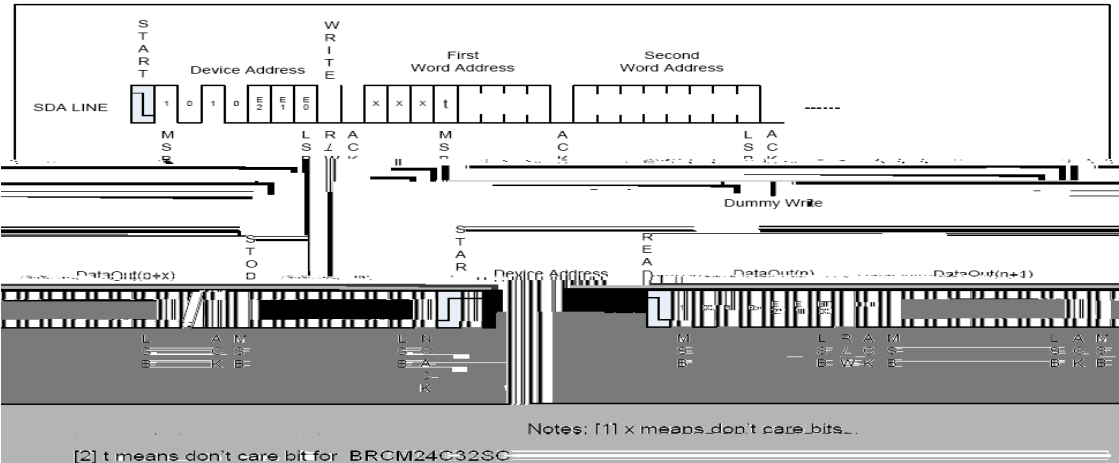


Figure 9

/ Functional Description

/ Read Identification Page

32					
1011b	A15 / A5	A4 / A0	ID		
		10d	22	ID	
32					

in+ oA4/daton 2201 Twage

)-5.38

/ Functional Description




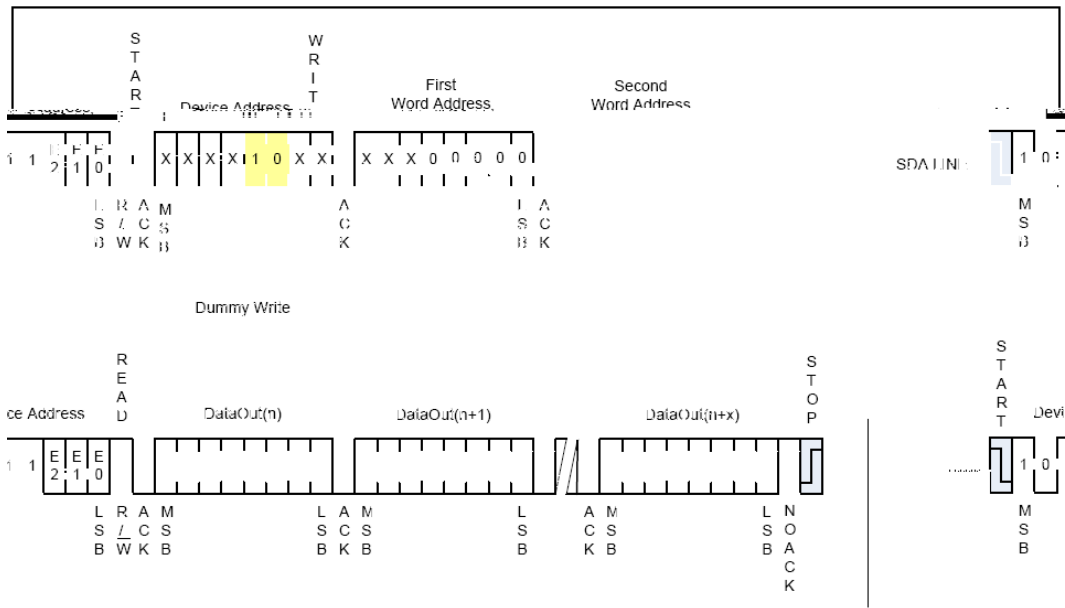


Figure 11 Sequential Read


/ Time Sequence Diagram

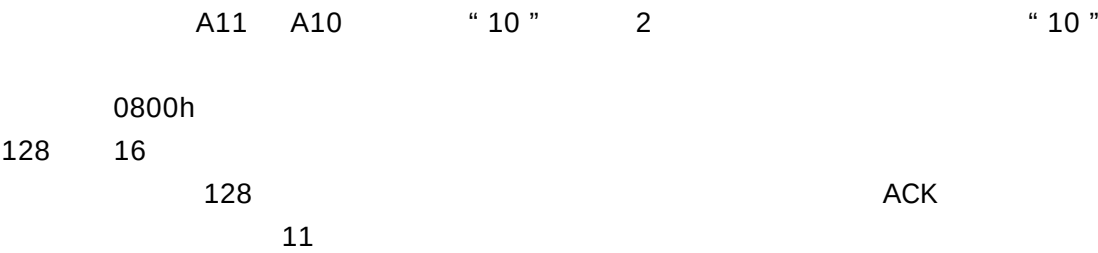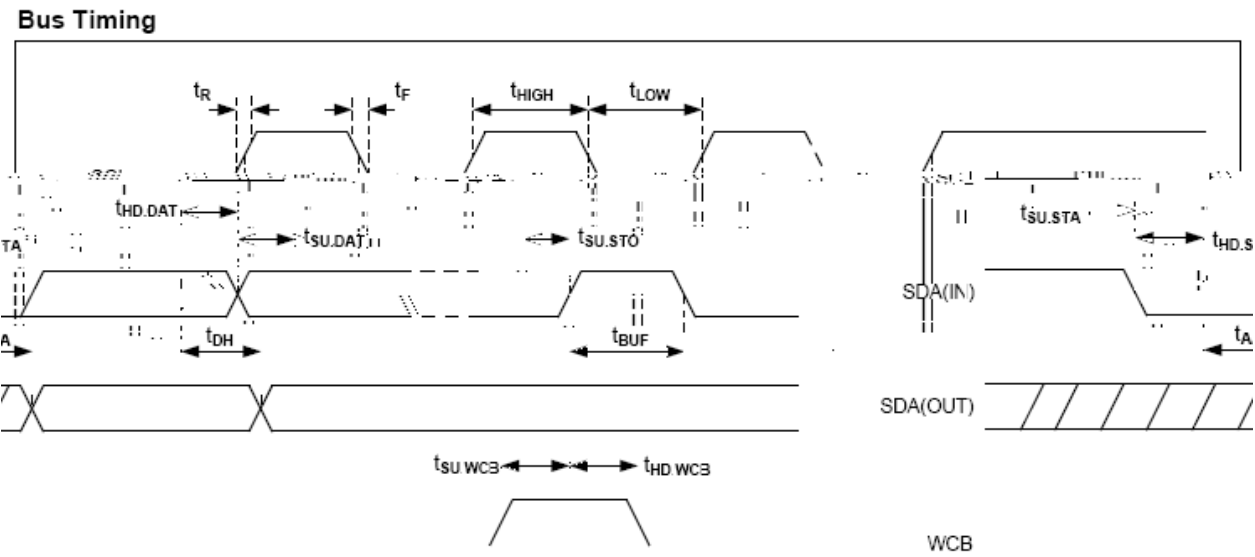


Write Cycle Timing

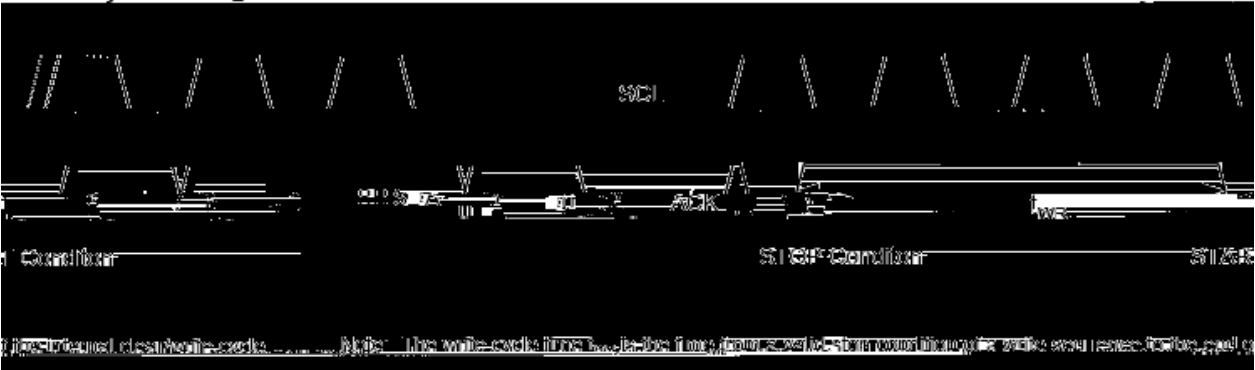

© 2000 by The McGraw-Hill Companies, Inc. All rights reserved. Printed in the United States of America. This book is printed on acid-free paper. 10 9 8 7 6 5 4 3 2 1




/ Marking Instructions

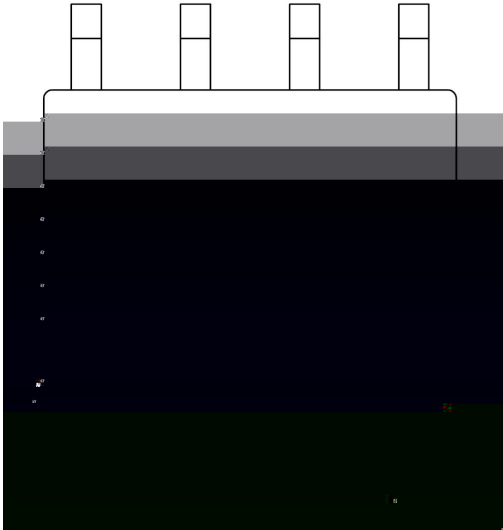

24C32

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

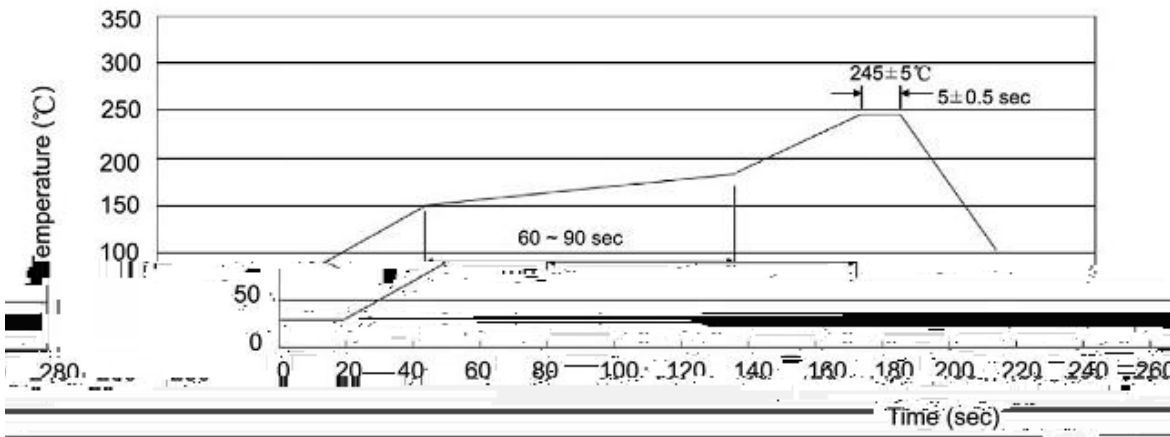

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± ± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOP/ESOP-8	4,000	2	8,000	6	48,000	13 ×12	360×360×50	380×335×366