

/ Descriptions


BRCO7350UMC	CMOS
200mA	55V
BRCO7350UMC	CMOS

/ Features


±
±
μ

/ Applications

/ Equivalent Circuit

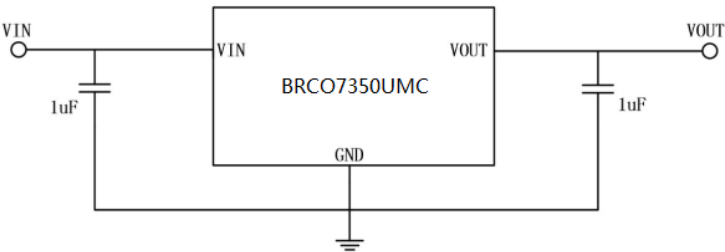

/ Pinning

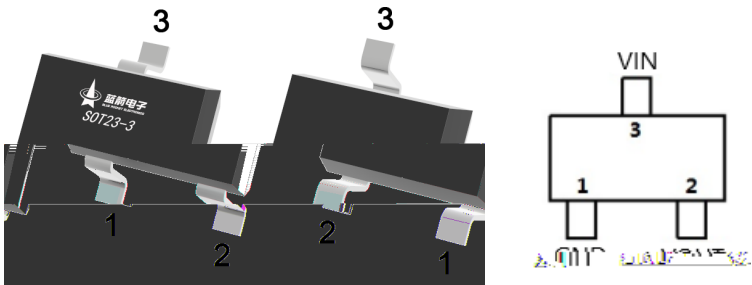


/ Absolute Maximum Ratings(Ta=25)


/ Electrical Characteristics(TA=25 , VIN=VOUT+2V, CIN=COU=1uF, unless otherwise specified)

						V
						V
						uA
						mA
						mA
						mV
		≤ ≤				mV
		≤ ≤				%/V
		≤ ≤		±		ppm/
						dB


/ Functionl Block Diagram

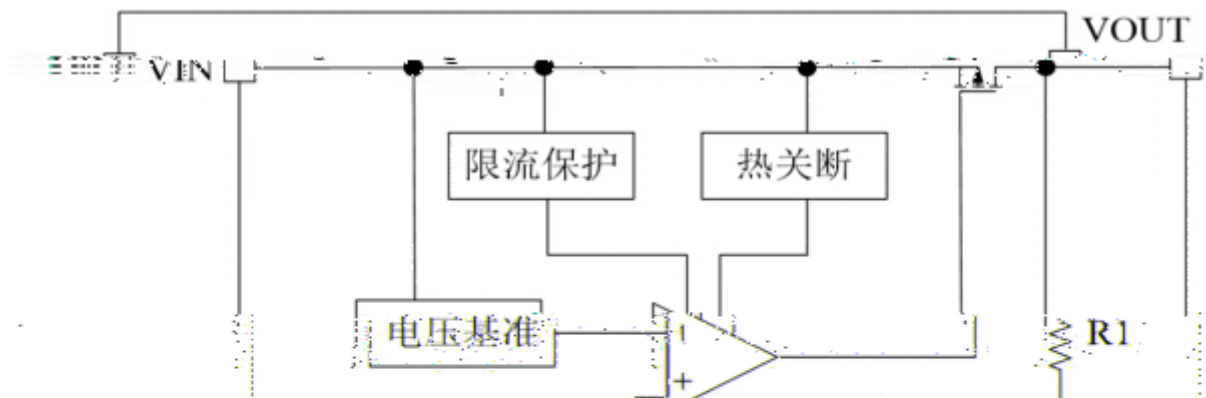


/ Package Dimensions

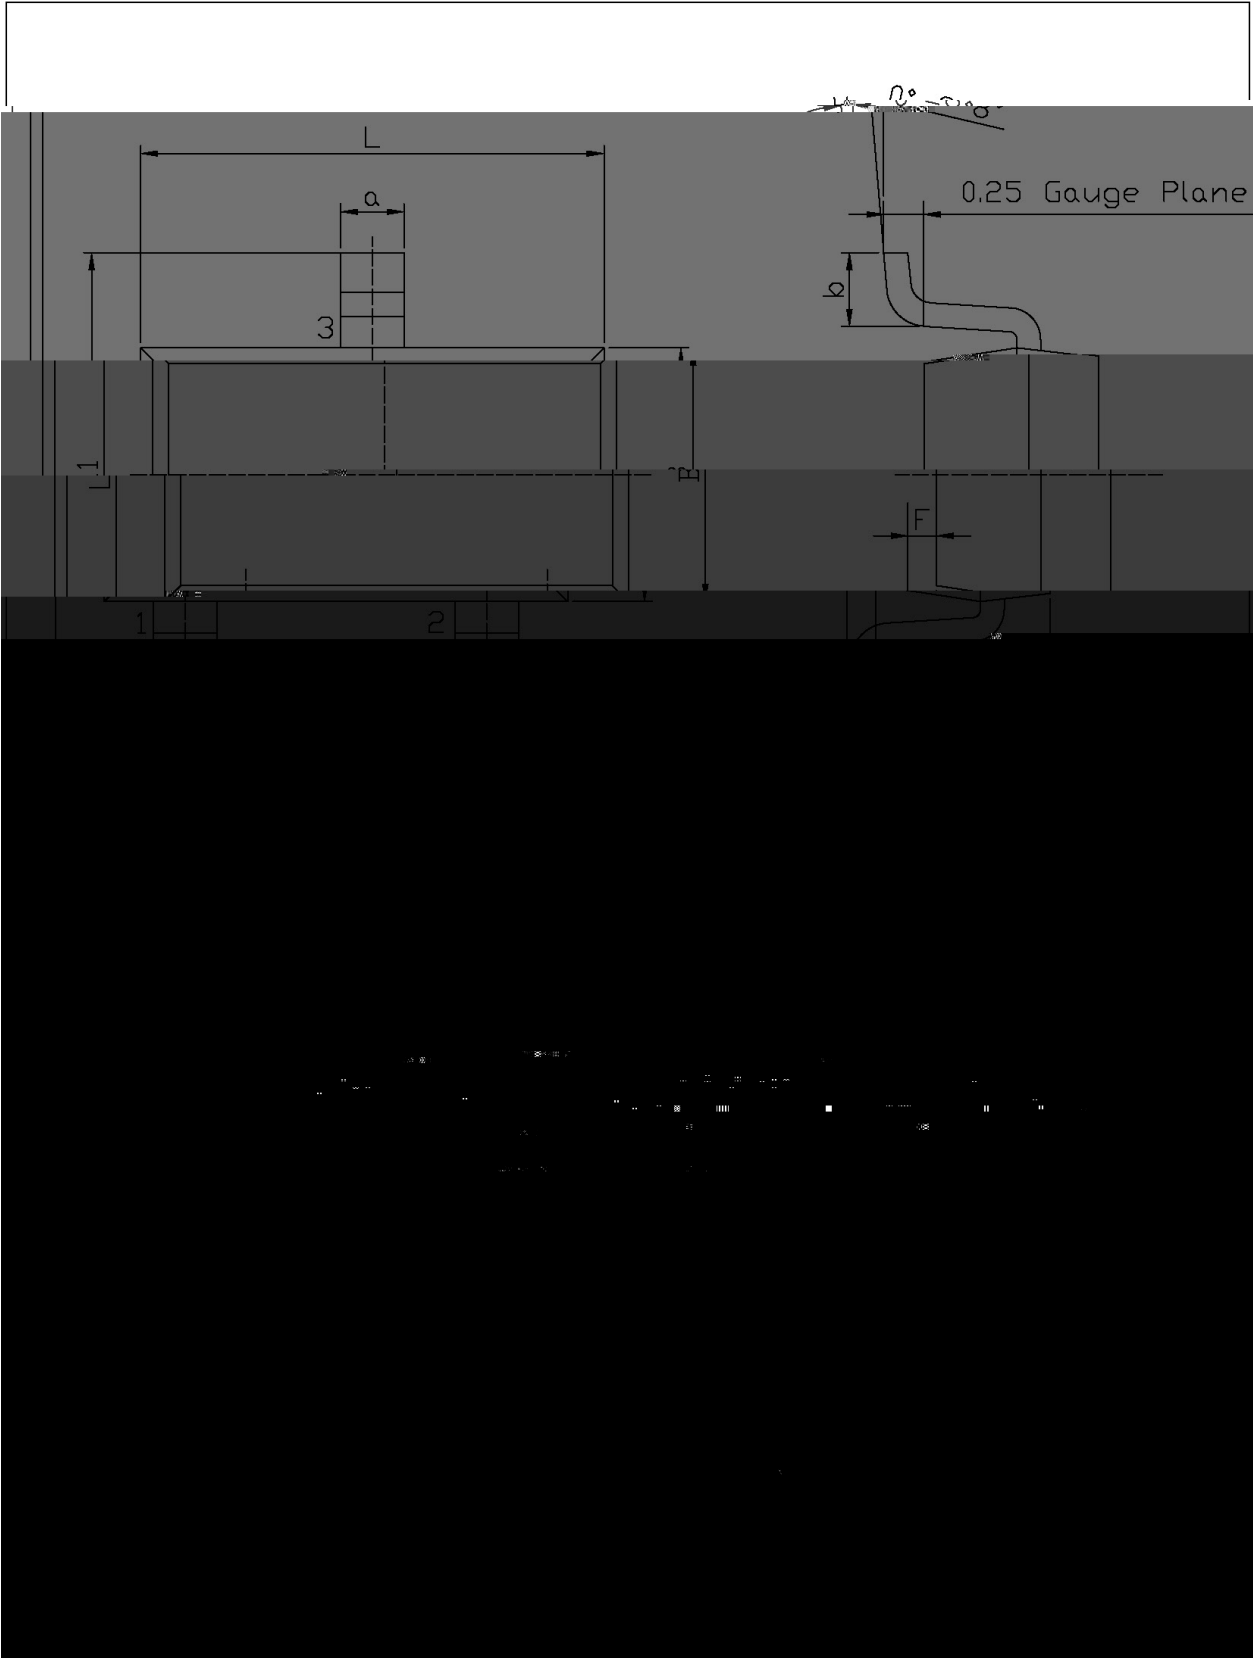

/ Marking Instructions

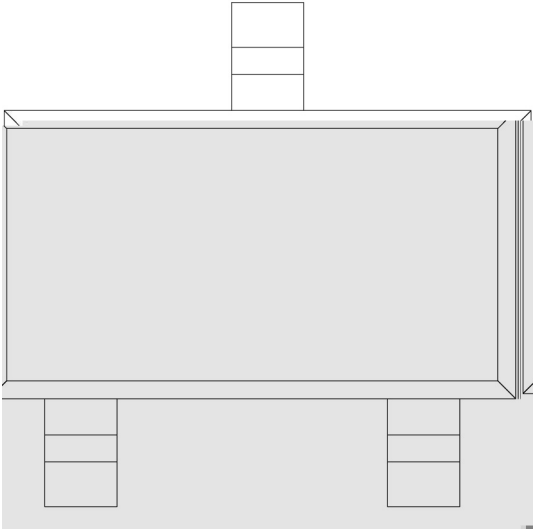

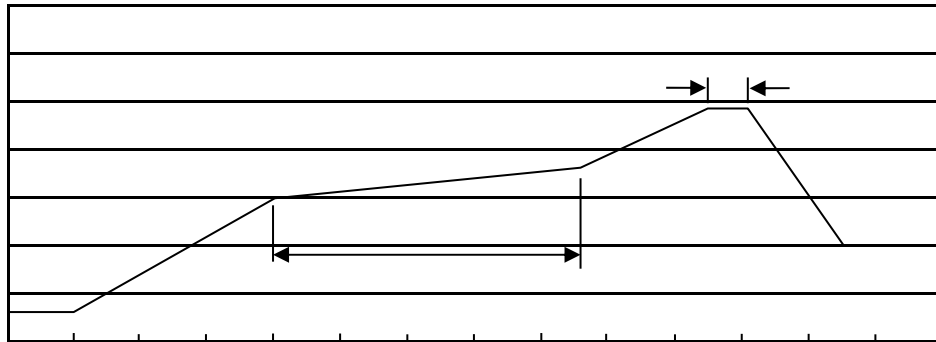 $\pm$ $\pm$

7>û ~ E	;>û 'H					;>û p . Æ		
	--	-- -	-	- 1ç	1ç		-	1ç

6 6