

BRCO7350UT



DATA SHEET

/ Descriptions

BRCO7350UT	CMOS
200mA	55V
BRCO7350UT	CMOS

/ Features



- ◆
- ◆
- ◆
- ◆
- ◆
- ◆
- ◆
- ◆

μ
 $\pm$
 $\pm$

/ Applications

- ◆
- ◆
- ◆

/ Equivalent Circuit

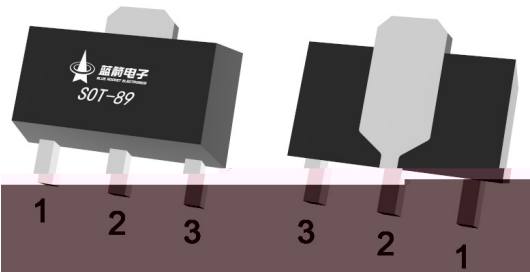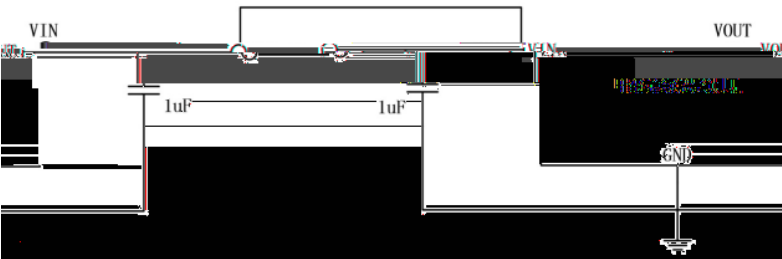


/ Marking

/ Absolute Maximum Ratings(Ta=25)


/ Electrical Characteristics(TA=25 , VIN=VOUT+2V, CIN=COU=1uF, unless otherwise specified)

						V
						V
						uA
						mA
						mA
						mV
						mV
						%/V
						ppm/
						dB

/ Functionl Block Diagram

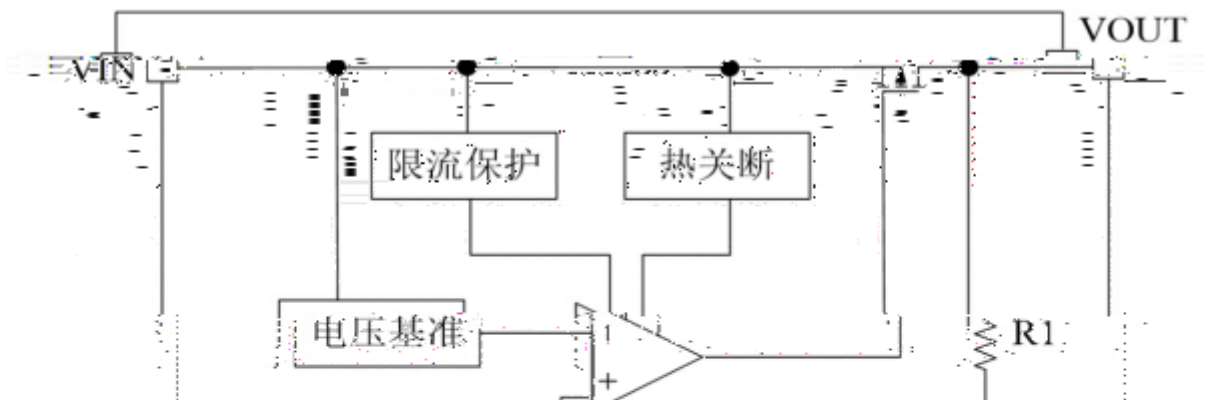

/ Marking Instructions

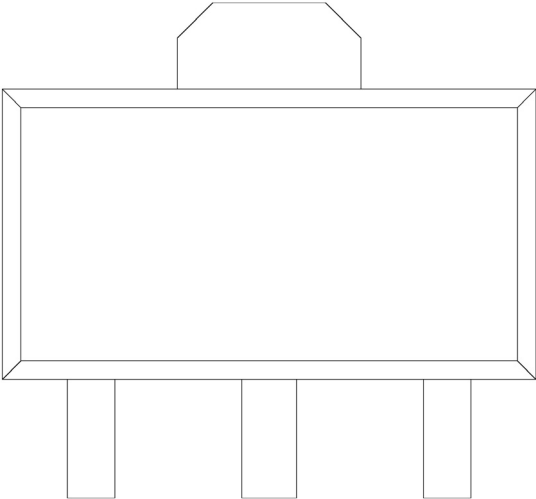

:

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

7>ß E	Units/Reel / >-	Reels/Inner Box >- /-	; >ß fH	; >ß p .
-------	--------------------	--------------------------	---------	----------