


BRC07550STA



DATA SHEET

/ Descriptions

SOT-89


/ Features

30V 2.5μA ±2%


μ ±

/ Applications

/ Equivalent Circuit

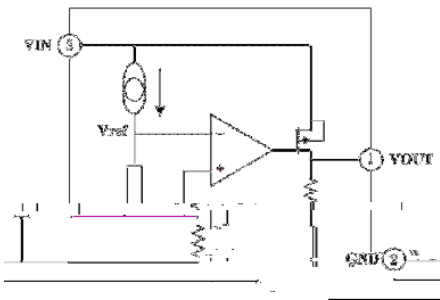

/ Pinning

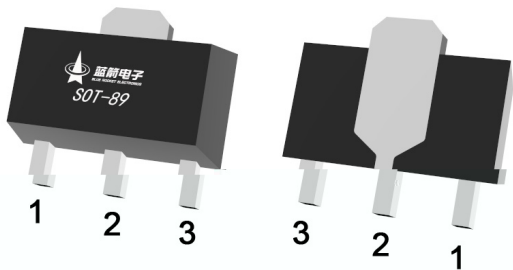

/ Marking




/ Absolute Maximum Ratings(Ta=25)

	θ		



/ Electrical Characteristics(Ta=25)

		$\leq \leq$				
						μ
		$\leq \leq$				
		$\leq \leq$				




/ Electrical Characteristic Curve

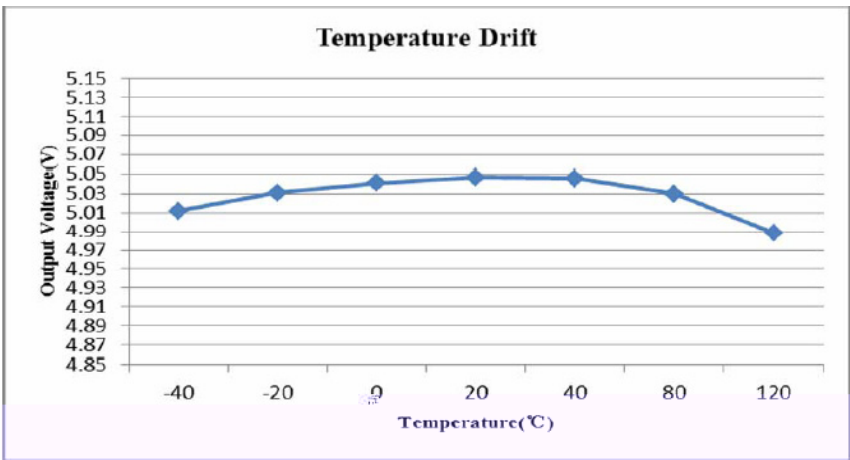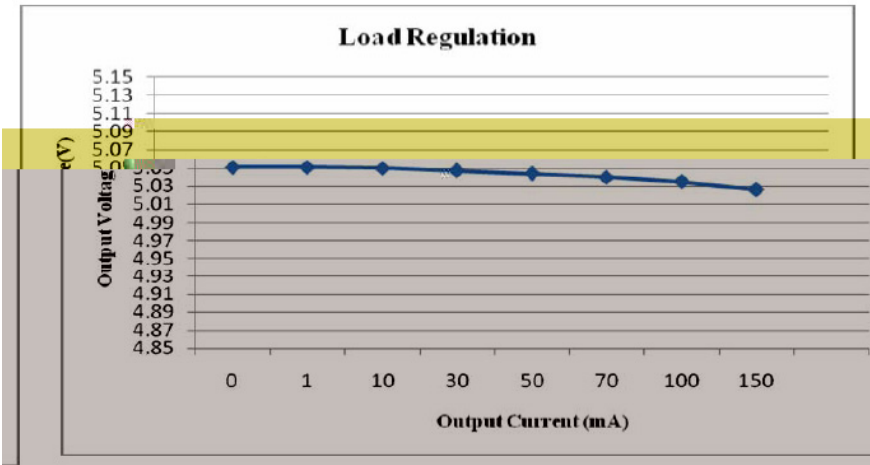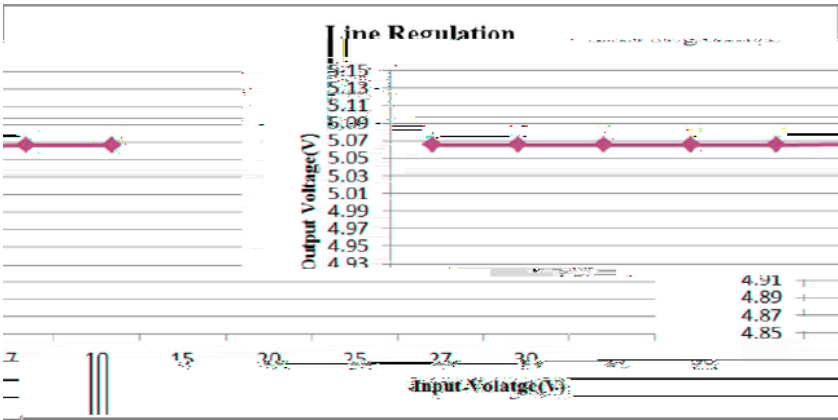


/ Typical Application Circuit

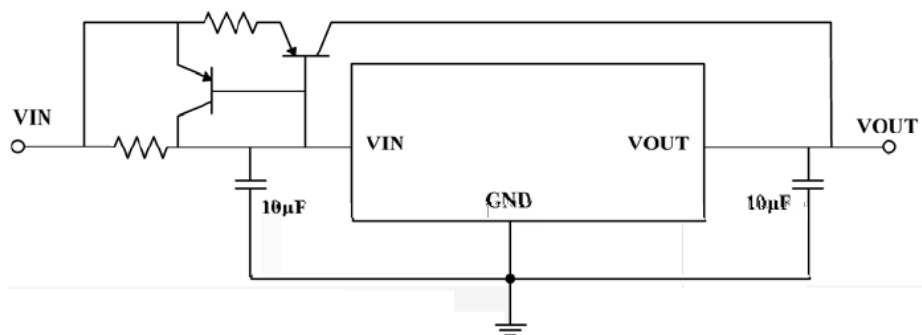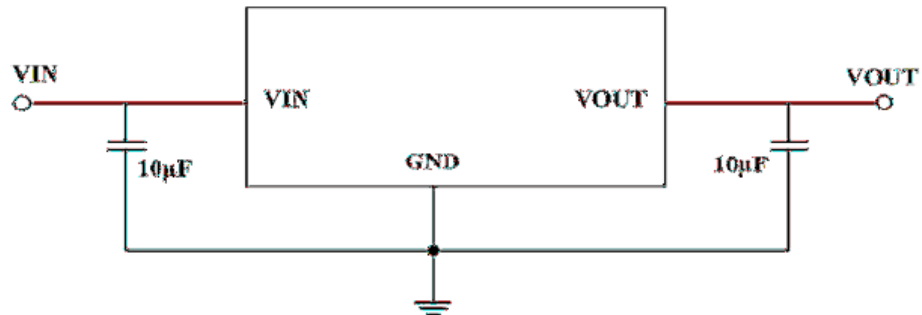


/ Typical Application Circuit

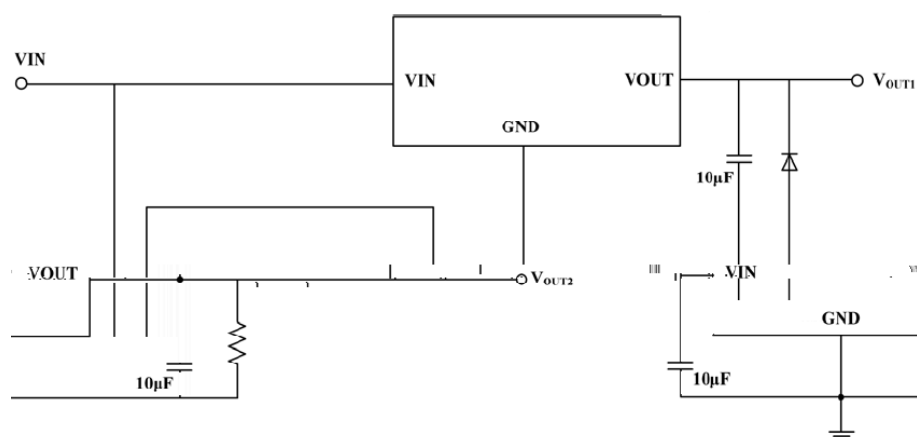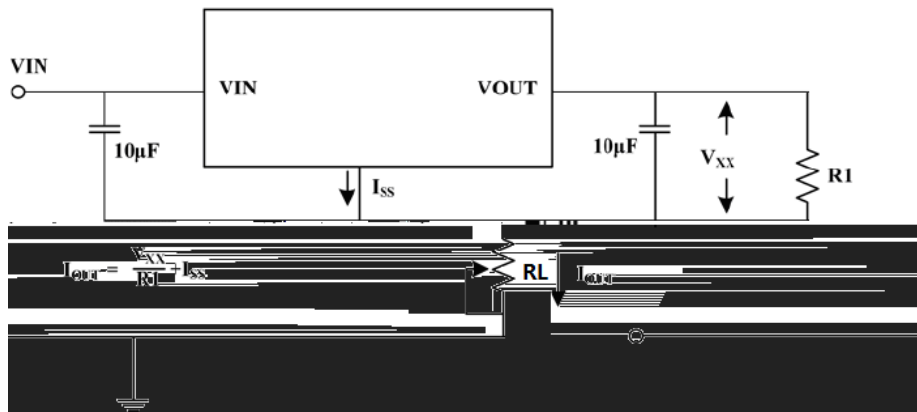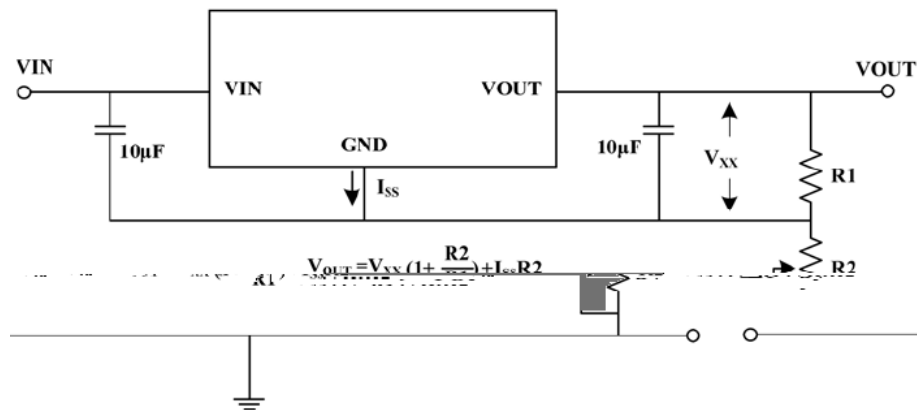

/ Marking Instructions

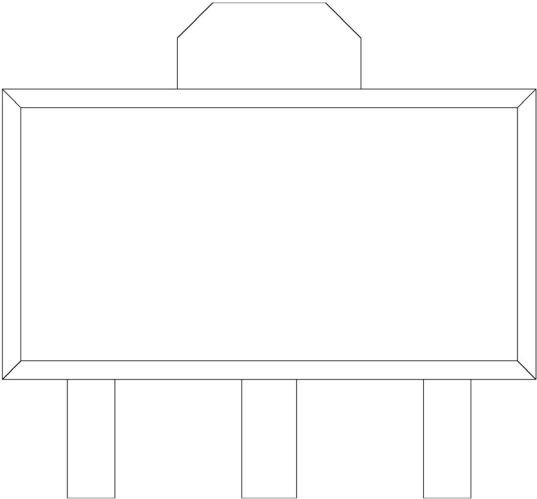

**

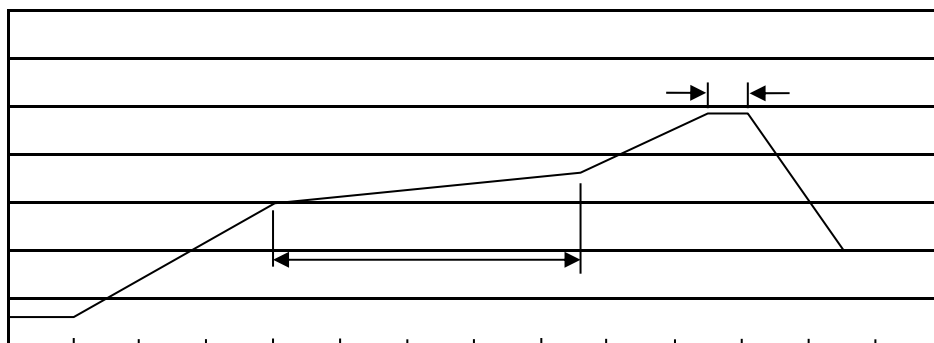 $\pm$ $\pm$ $\pm$ $\pm$

/ Resistance to Soldering Heat Test Conditions

 $\pm$ $\pm$

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

/ Notices