
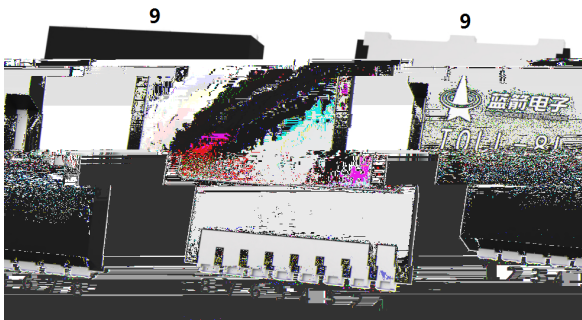


N-Channel MOSFET in a TOLL-8L Plastic Package.




$$\begin{matrix} \leq & \Omega & \Omega \\ \leq & \Omega & \Omega \end{matrix}$$





	θ		/W
	θ		

$\leq$
 μ
 $\leq$
 $\leq$
 $\leq$
 $\leq$


						Ω

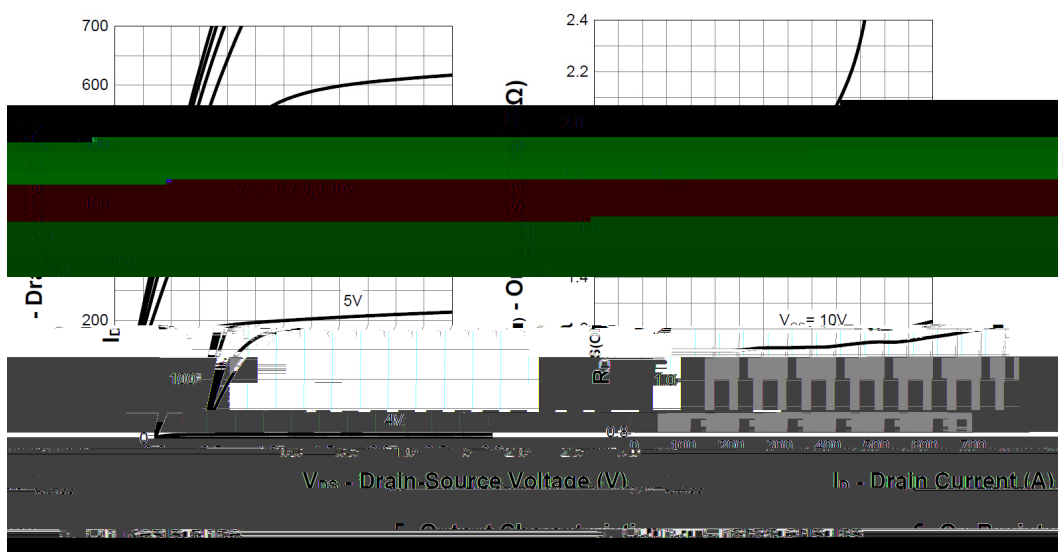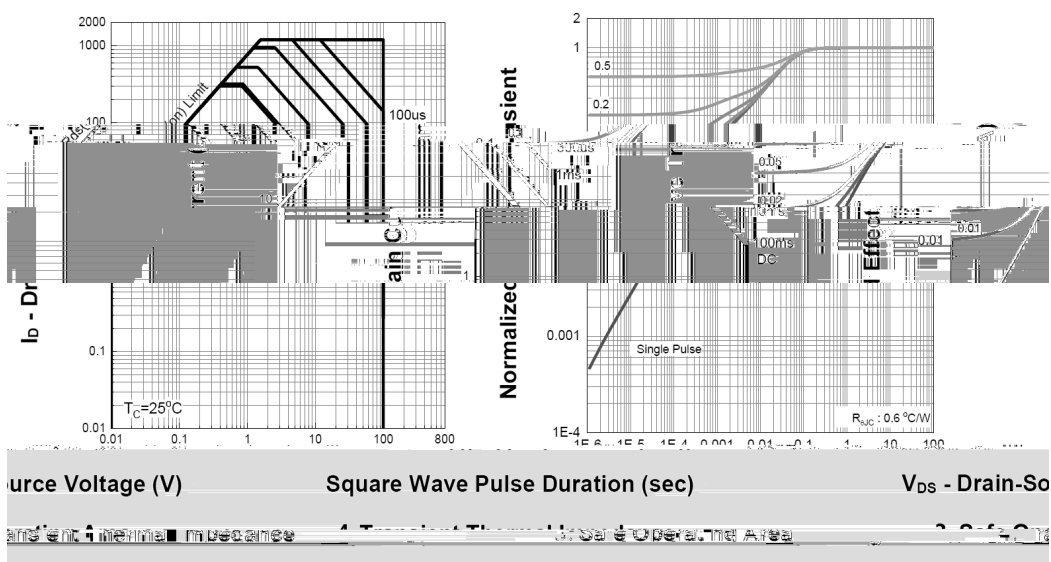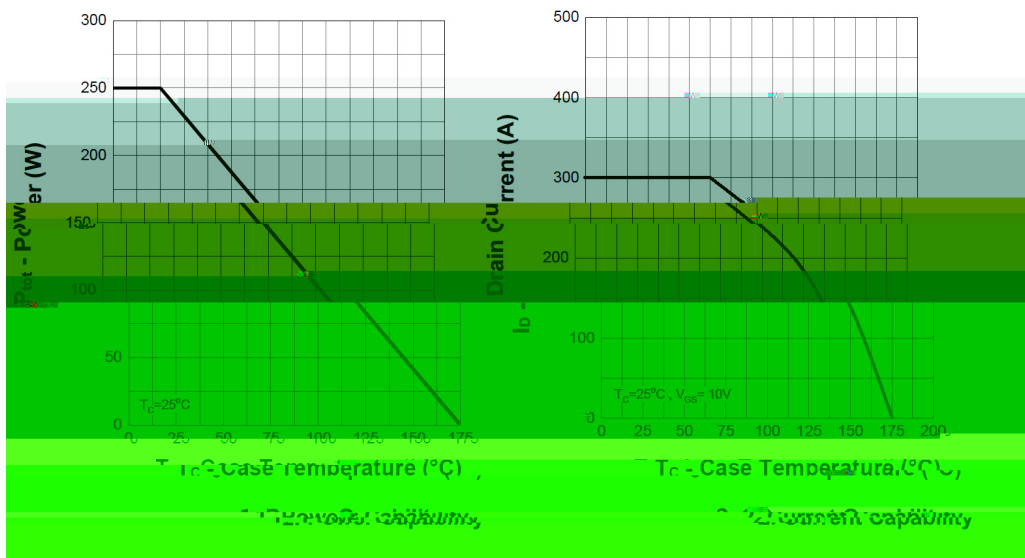

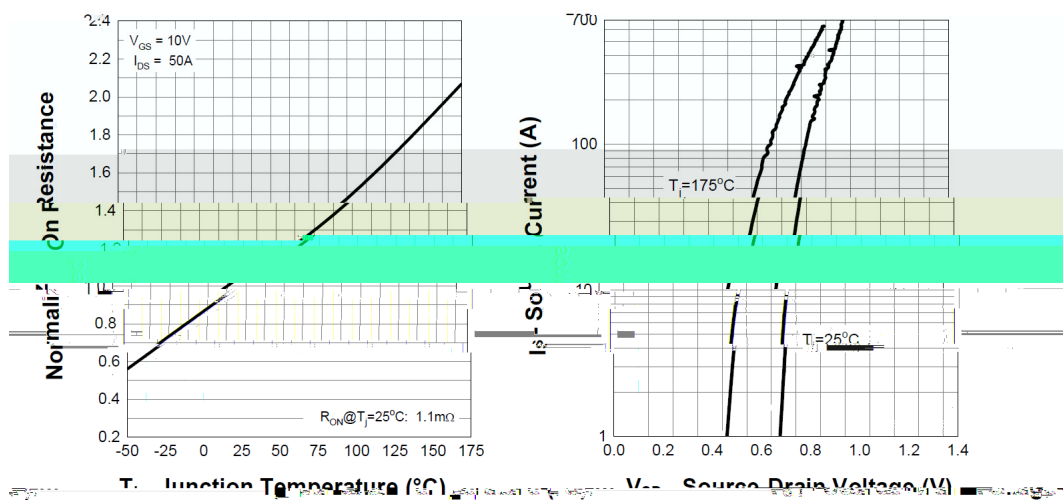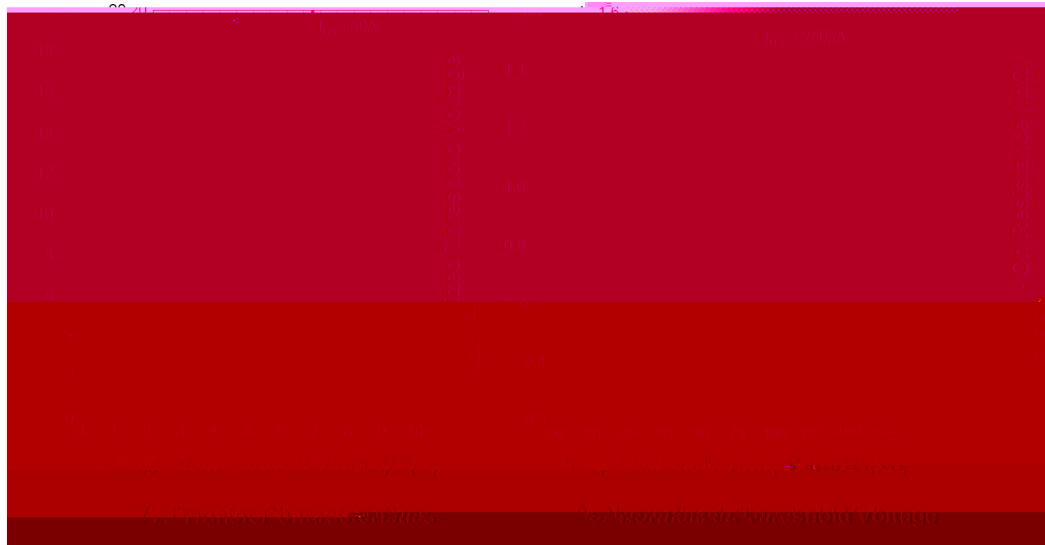


9. Normalized On Resistance

10. Diode Forward Current

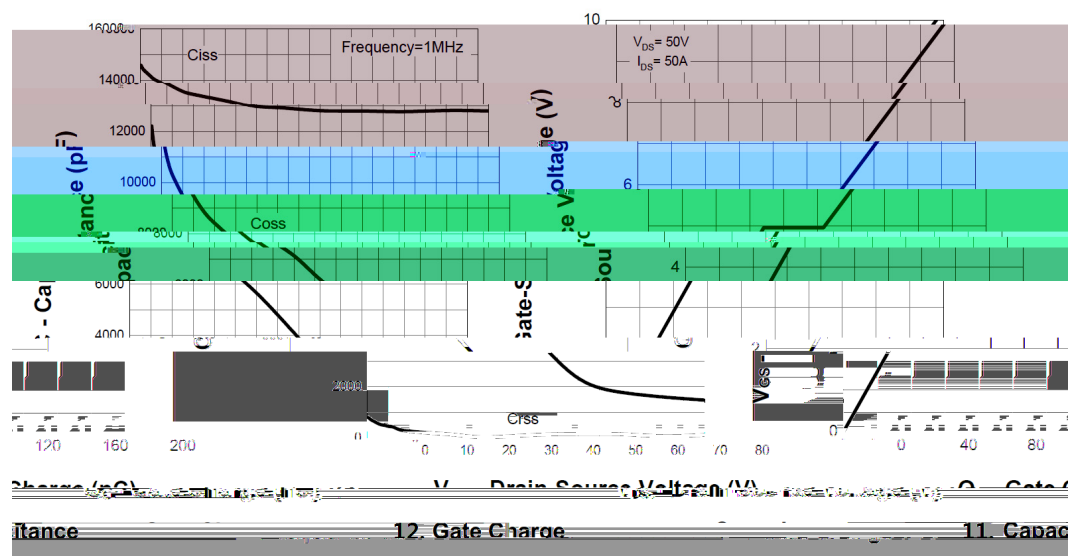


12. Gate Charge

11. Capacitance

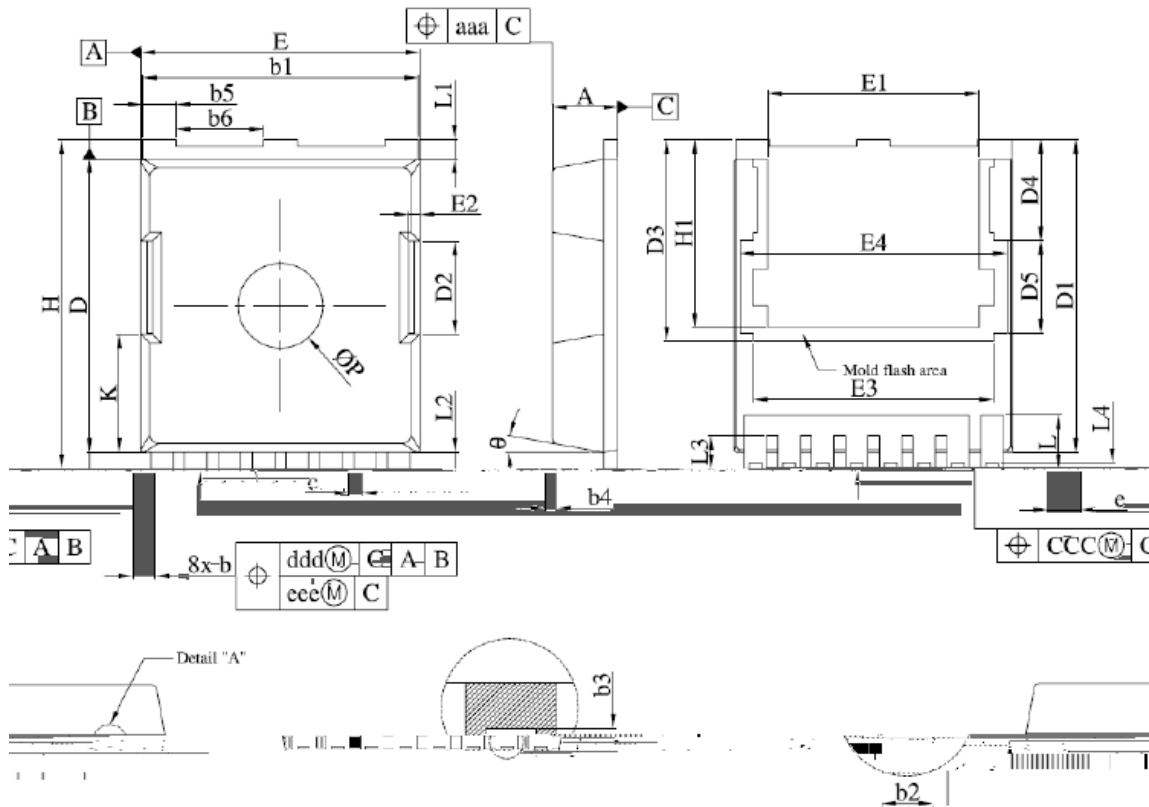


			θ		

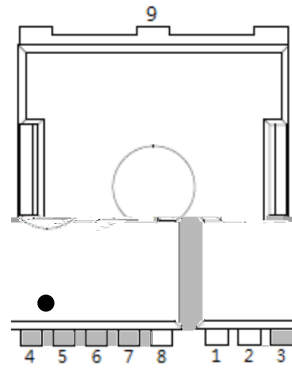

BR

Temperature Profile for IR Reflow Soldering(Pb-Free)

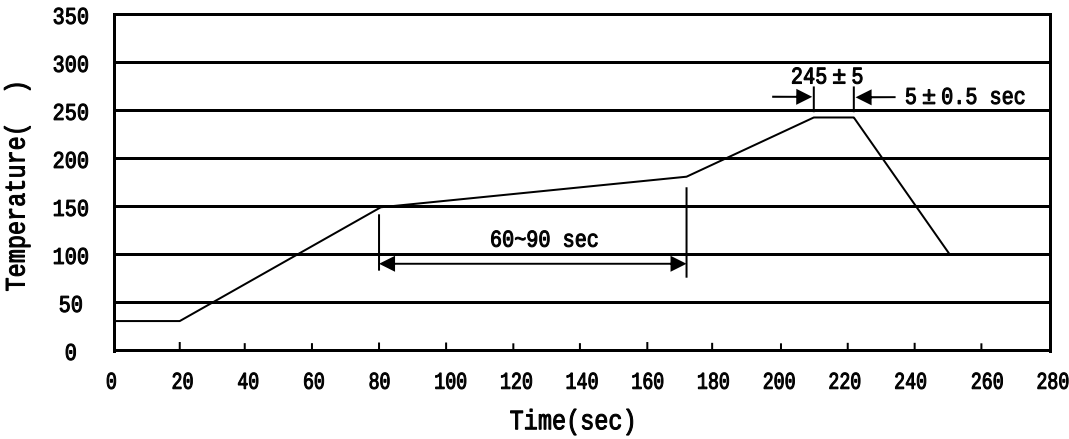

±

±

±

±

±

±

	; > B f H					; > B p .		
	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box