
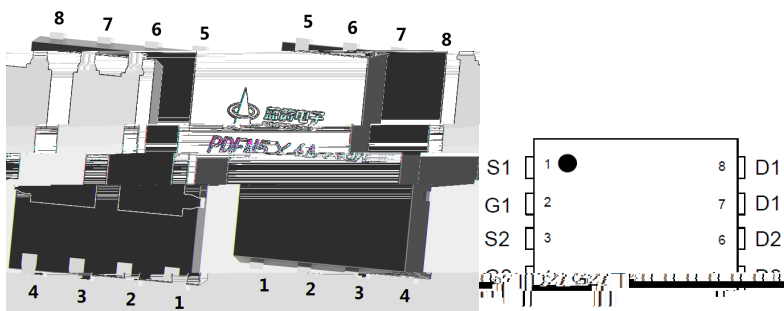


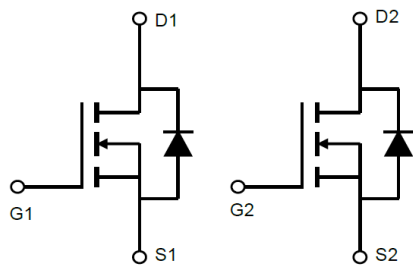

I

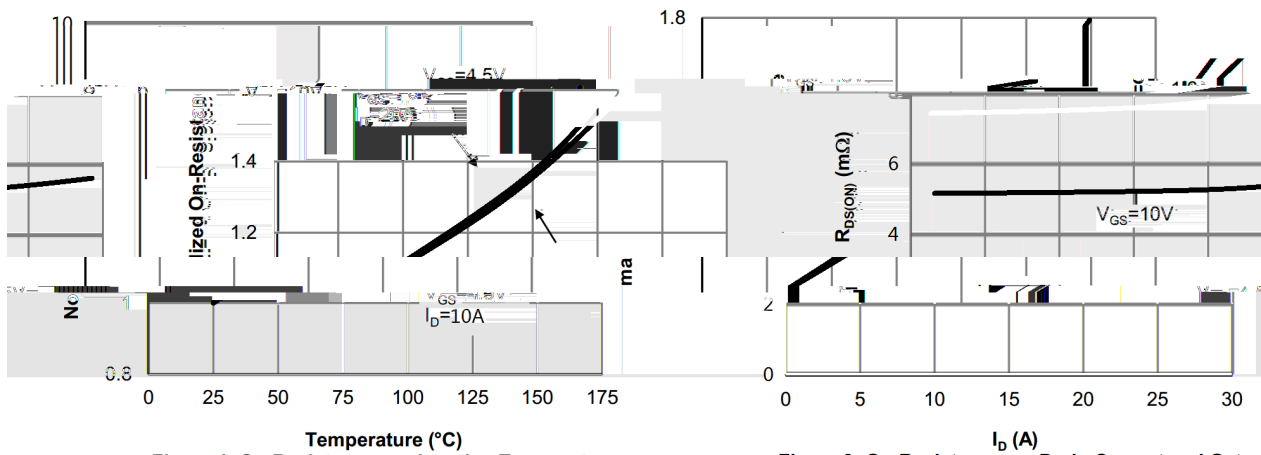
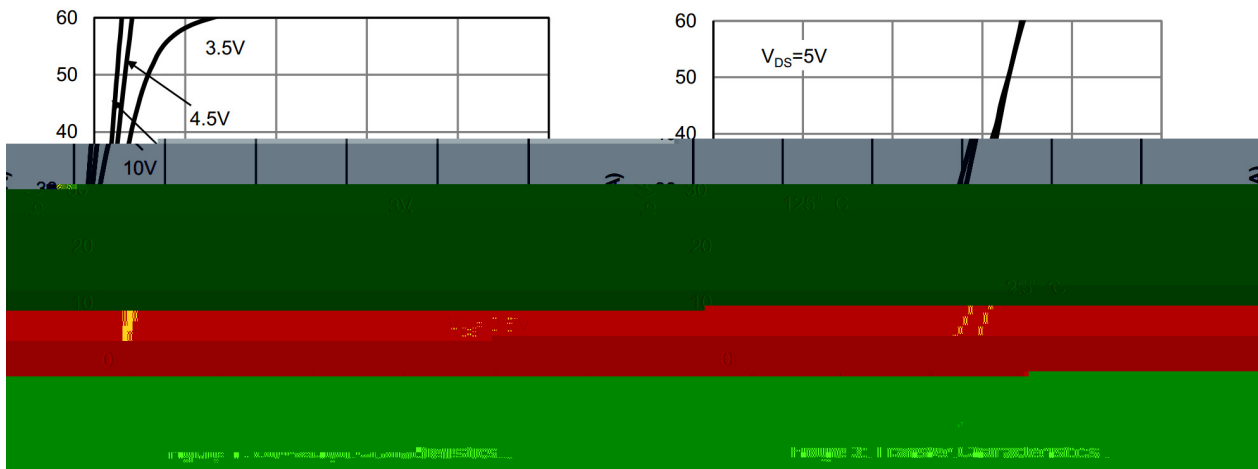
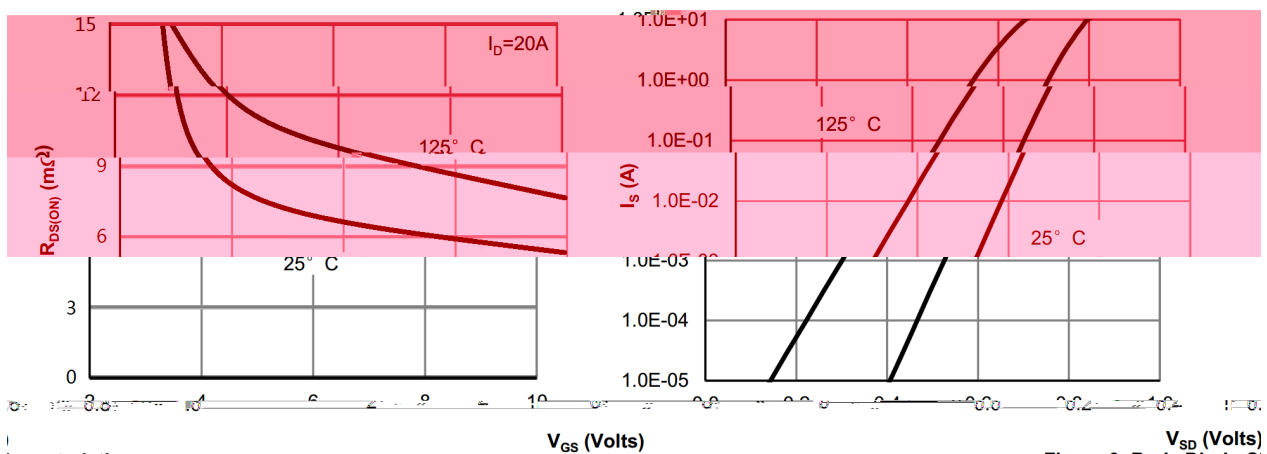


Figure 4: On-Resistance vs. Junction Temperature

Figure 3: On-Resistance vs. Drain Current and Gate Voltage



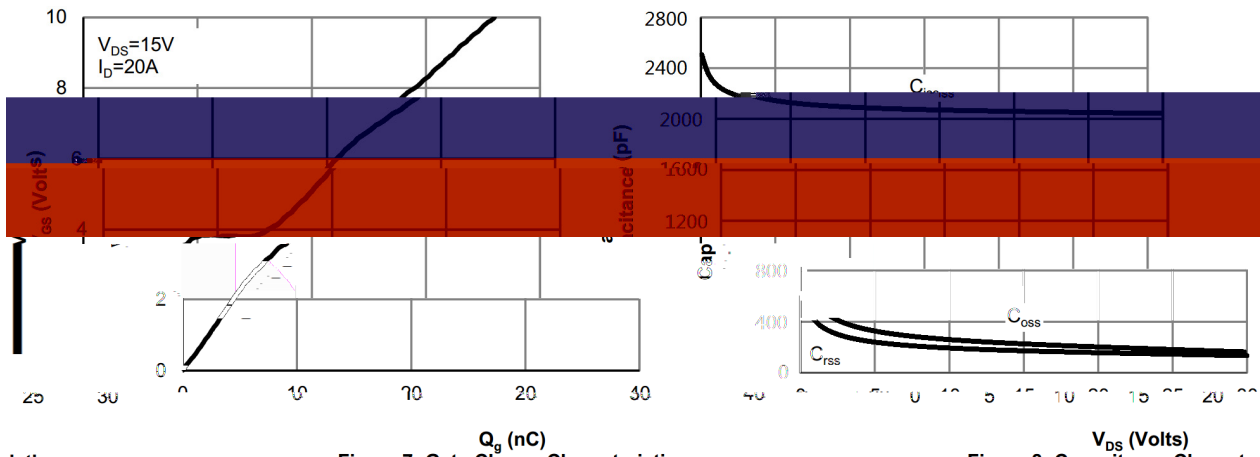


Figure 7: Gate-Charge Characteristics

Figure 8: Capacitance Characteristics



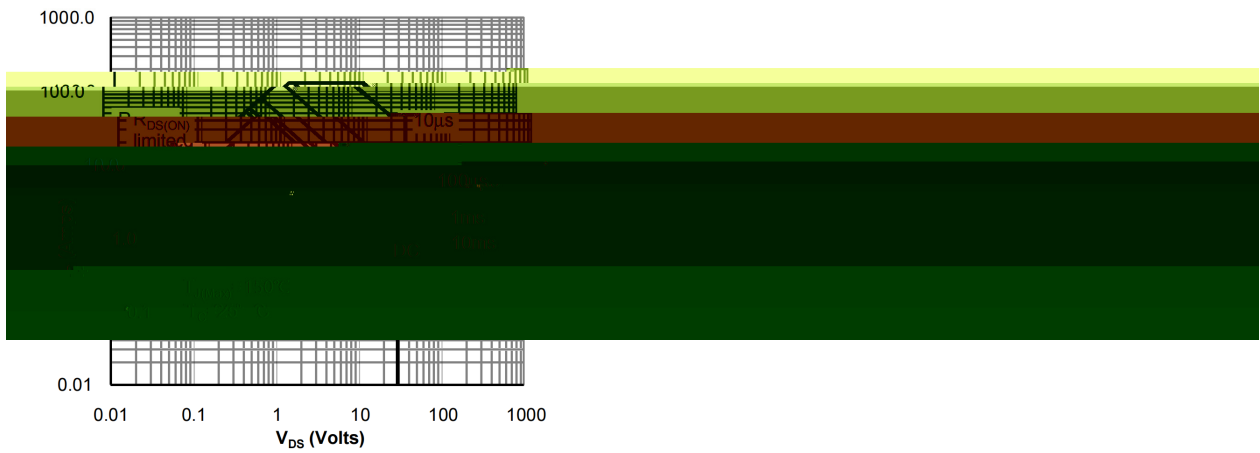


Figure 9: MOSFET Forward Bias Safe Operating Area

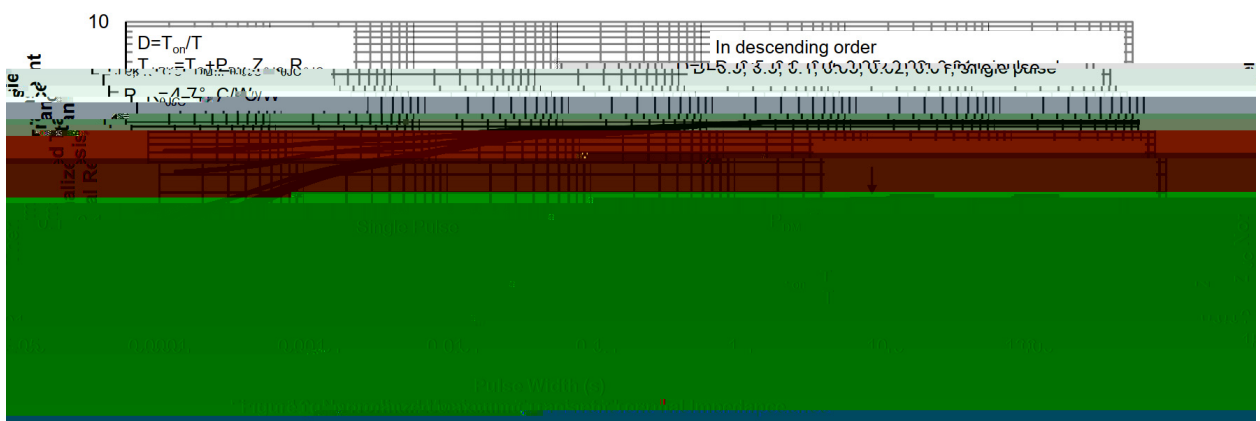

PDFN5 X6A

Unit:mm

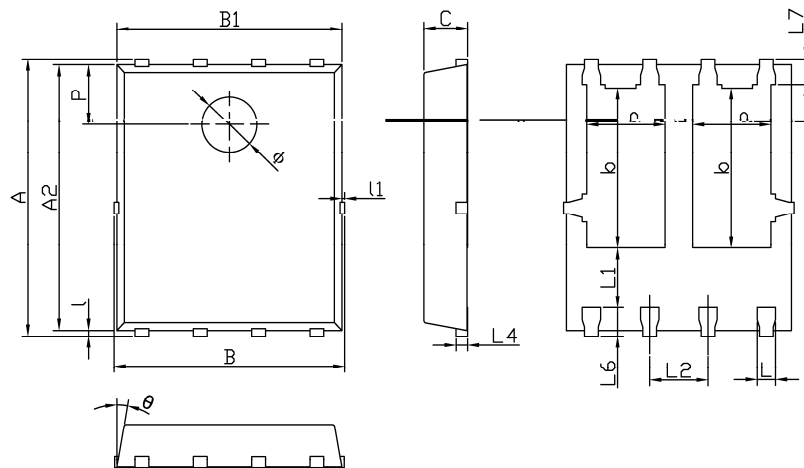

Dimensions In Millimeters			
Symbol	MIN	TYP	MAX
A	5.90	6.00	6.10
a	1.605	1.705	1.805
A2	5.70	5.75	5.80
B	4.90	5.00	5.10
b	3.375	3.475	3.575
B1	4.80	4.90	5.00
C	0.90	0.95	1.00
L	0.30	0.40	0.50
l	0.06	0.13	0.20
L1	1.10	-	-
l1	-	-	0.10
L2	1.17	1.27	1.37
L4	0.21	0.26	0.34
L6	0.51	0.61	0.71
L7	0.45	0.55	0.65
P	1.15	1.30	1.45
θ	8°	10°	12°
ϕ	1.10	1.20	1.30

Rev.01 202209

