

[illegible]

/ Descriptions

o p p q N r s MOS t u B v l


/ Features

VDS (V) = 30V
ID =67A (VGS = ±20V)
RDS(ON)@10V≤6mR
L M AEC-Q101 N O P Q R S T U [w x G H I
Qualified to AEC-Q101 Standards for High Reliability, HF Product.


/ Applications

y z { | % DC/DC } ~ i , ¢ C £ ¢ ¥ C | [W X E F B C % Y 3 T U I

/ Equivalent Circuit



/ Pinning

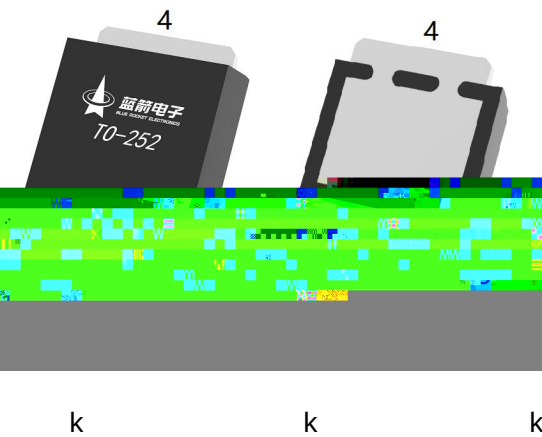

/ Marking


§ \] ¨ © I

	°C		


°C

--	--	--	--	--	--	--



/ Electrical Characteristic Curve

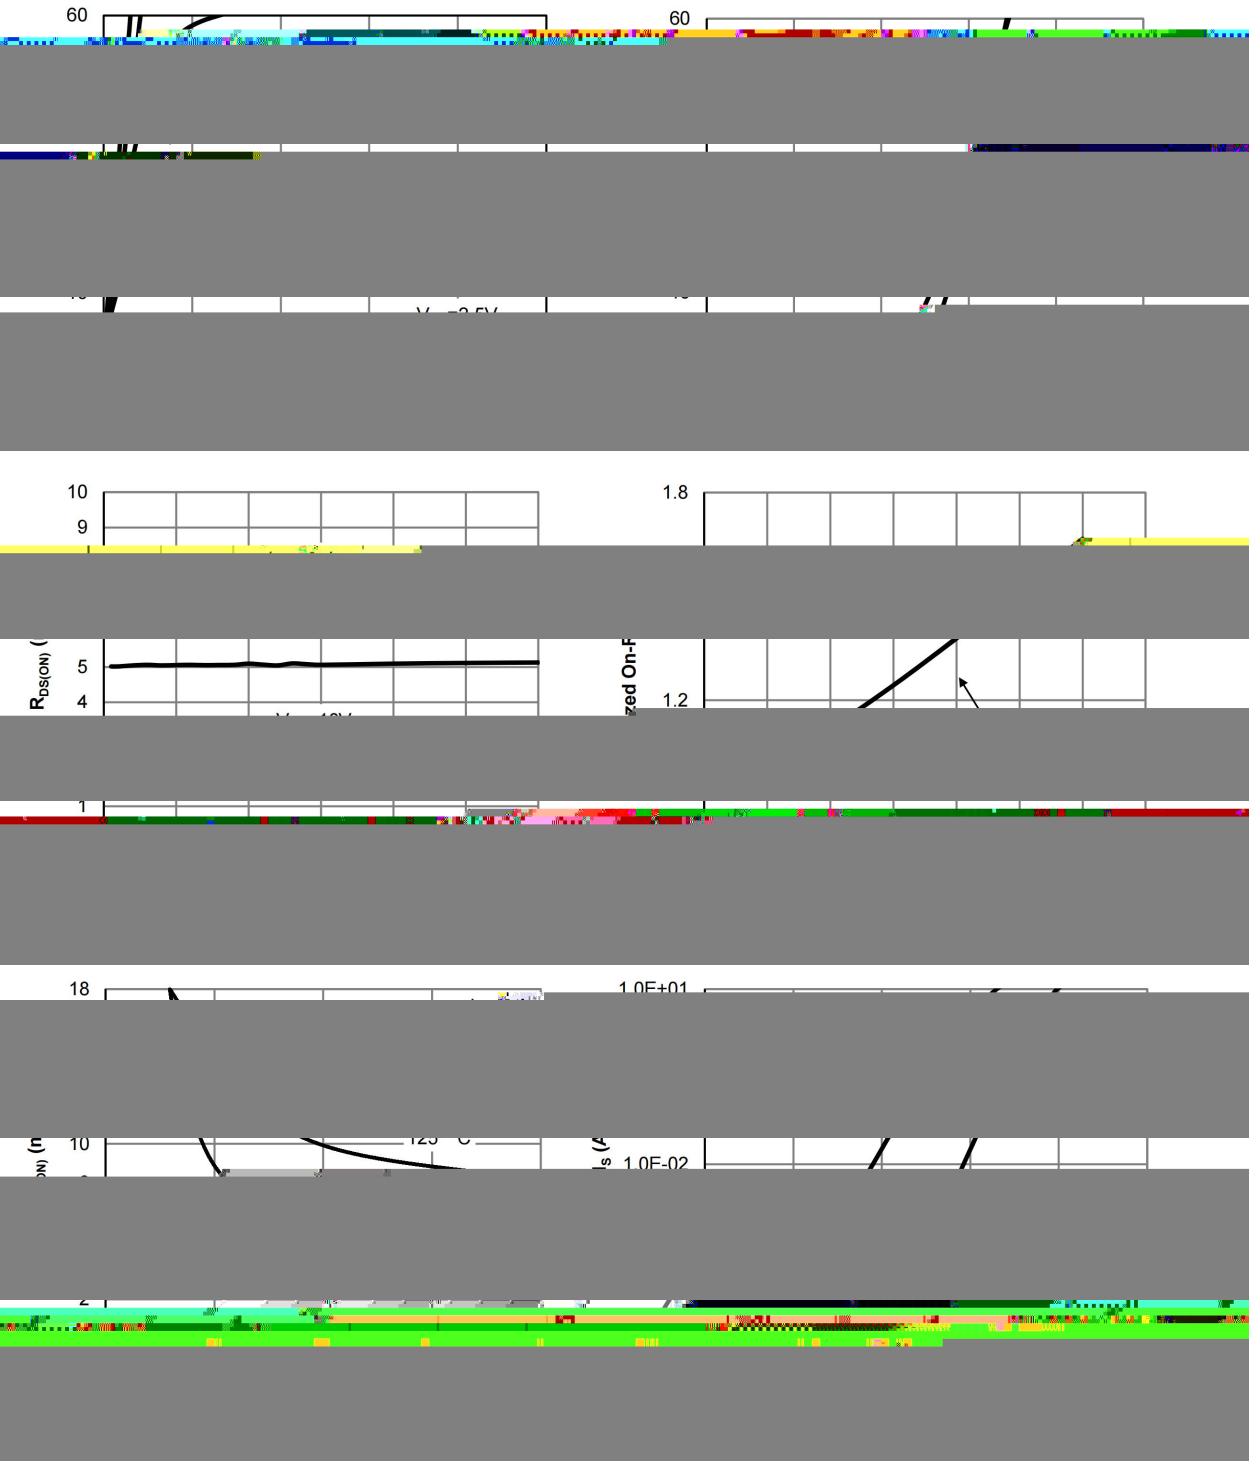

/ Electrical Characteristic Curve

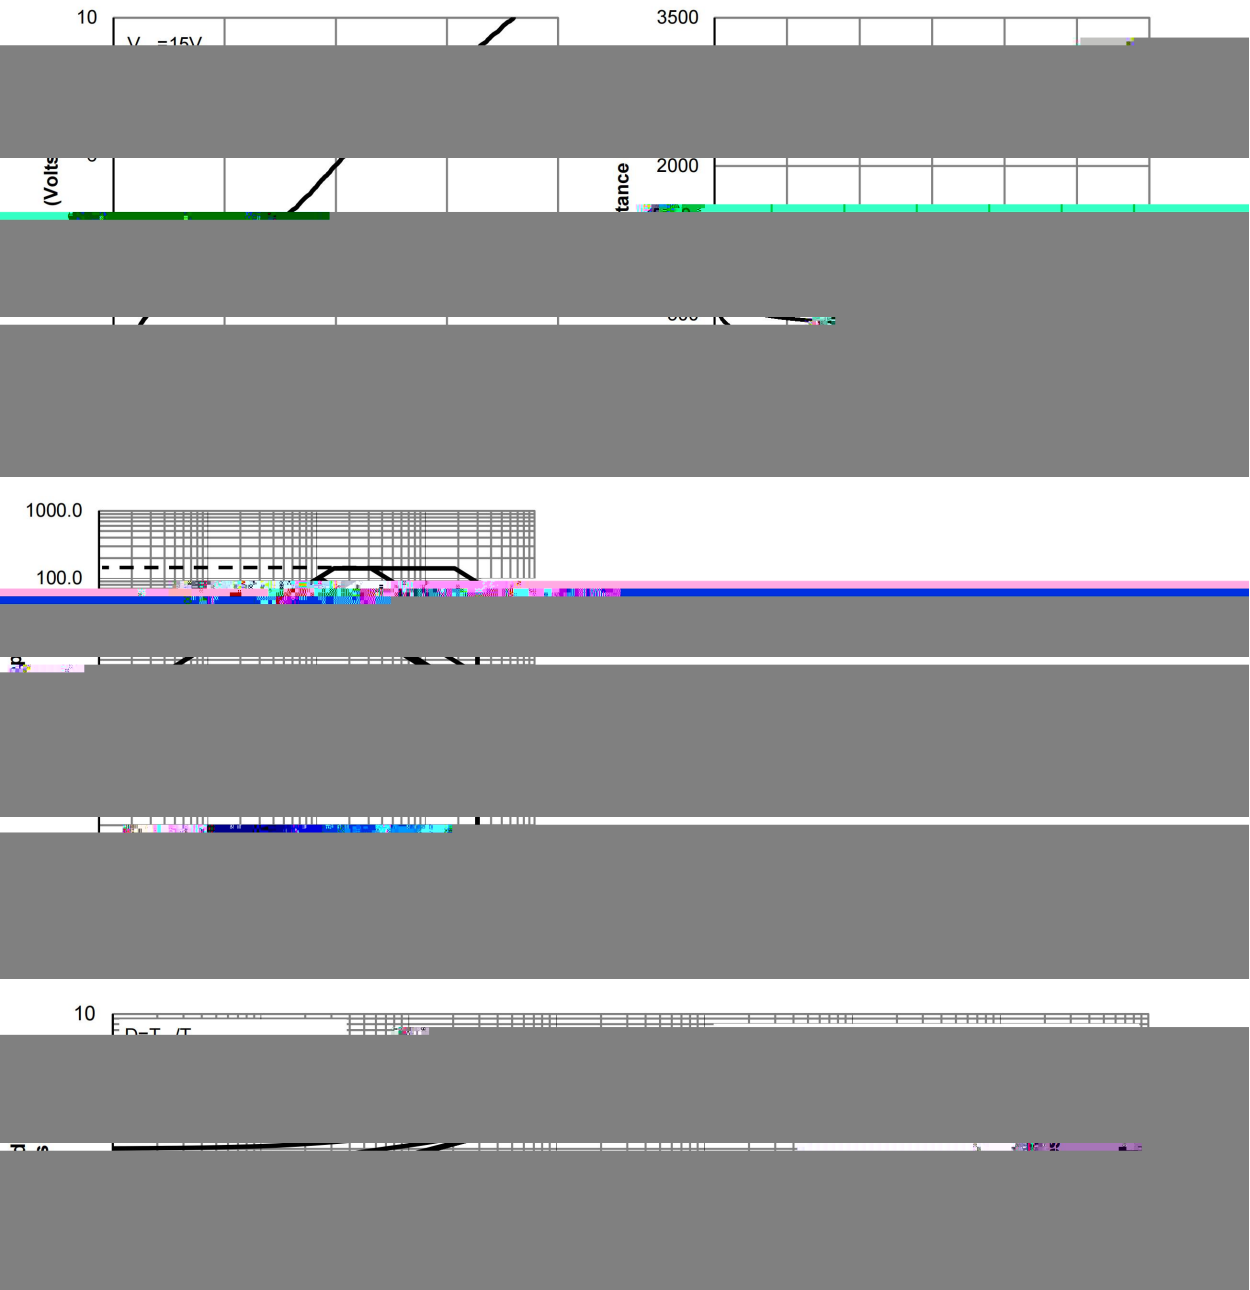


/ Package Dimensions

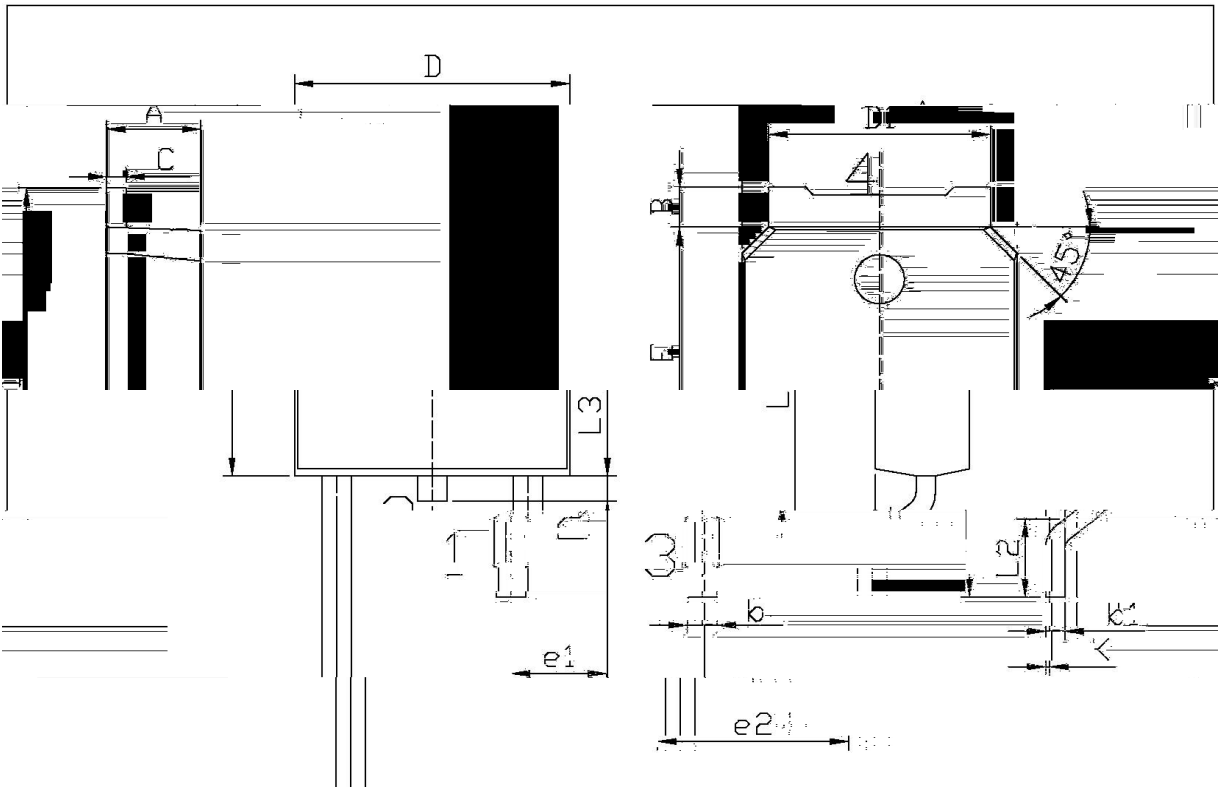

C	0.45	0.55	L2	1.70	2.00
0.90	D	6.45	6.75	L3	0.60
0.45	e1	6.45	6.50	k	0.60

TP-252

/ Marking Instructions

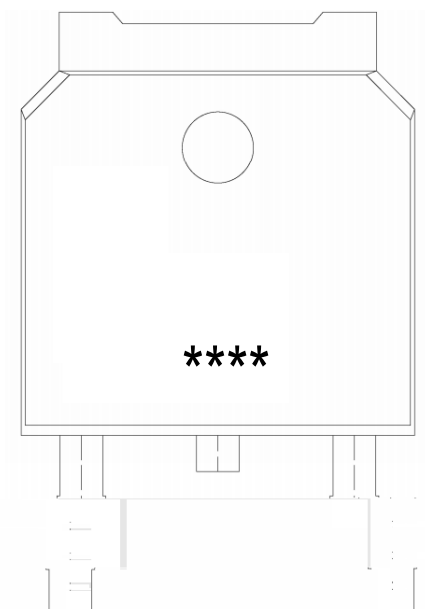

060N03


$$\pm \text{ }^{\circ}\text{C} \qquad \qquad \qquad \pm \qquad \qquad \qquad \text{ }^{\circ}\text{C}$$

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
TO-252	2,500	2	5,000	6	30,000	13" ×16	360×360×50	380×335×366

封装形式	包装数量					包装尺寸		
	Units/Tube 只/套管	Tubes/Inner Box 套管/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Tube 套管	Inner Box 盒	Outer Box 箱
TO-251/252	75	48	3,600	5	18,000	526×20.5×5.25	555×164×50	575×290×180

8 8