


×





			±	
	≤	θ		
		θ		

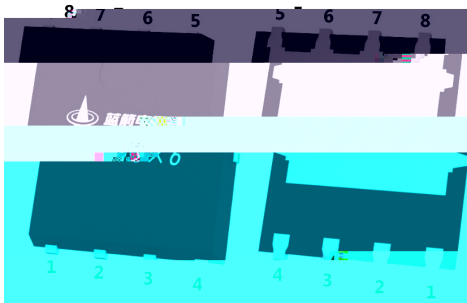

					±	
						Ω

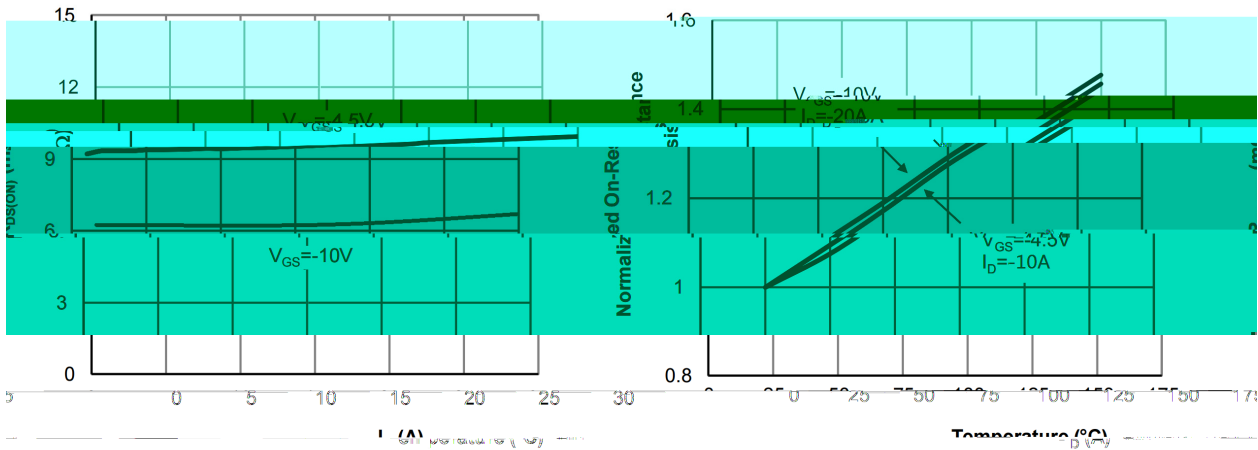
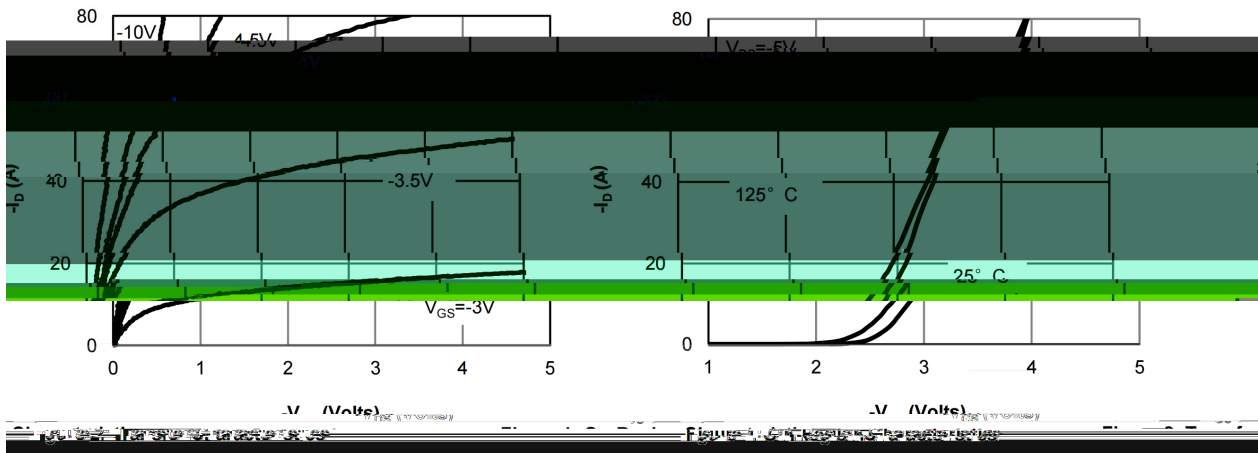


Figure 4: On-Resistance vs. Junction Temperature

Figure 3: On-Resistance vs. Drain Current



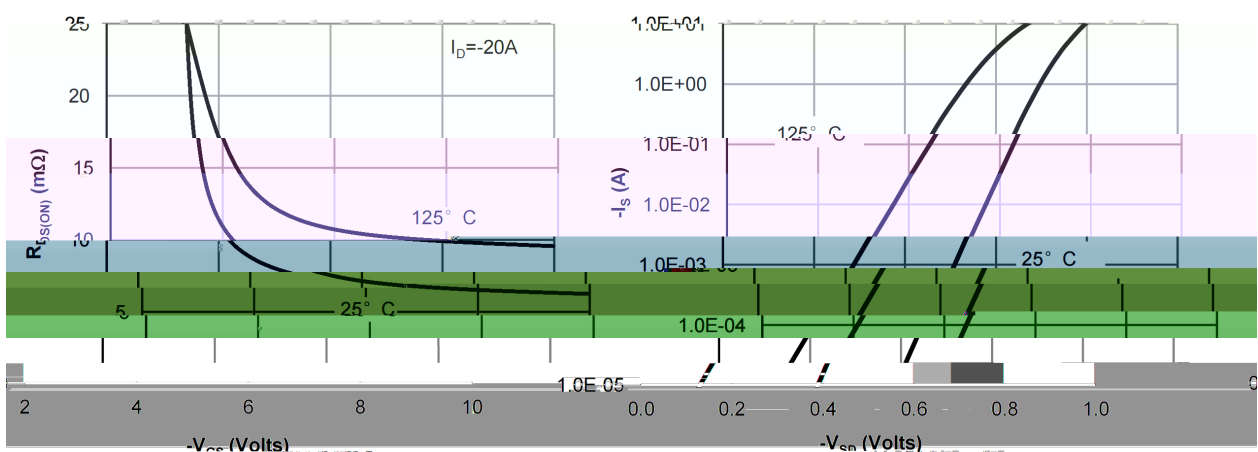



Figure 5: On-Resistance vs. Gate-Source Voltage

Figure 6: Body-Diode Characteristics

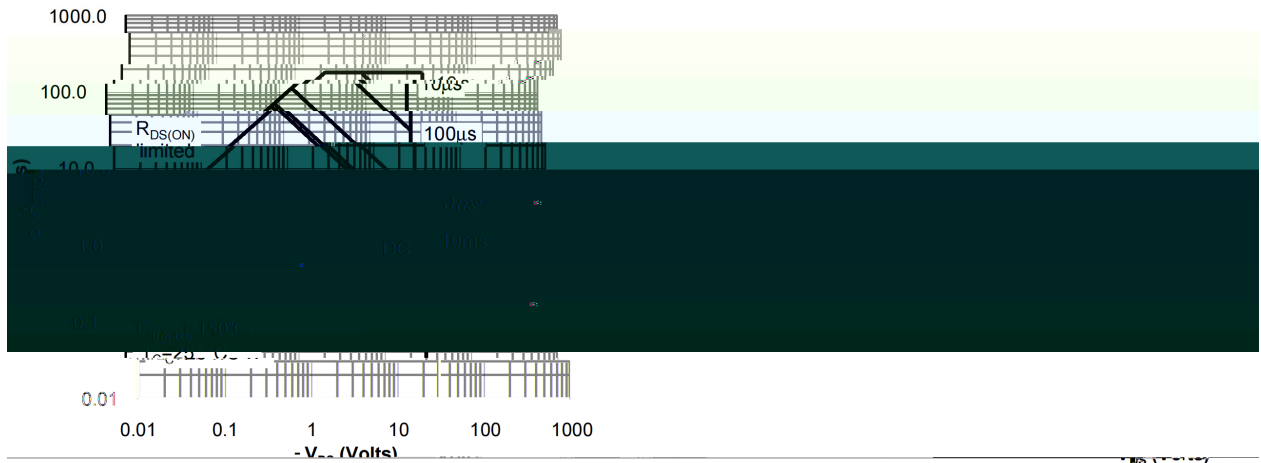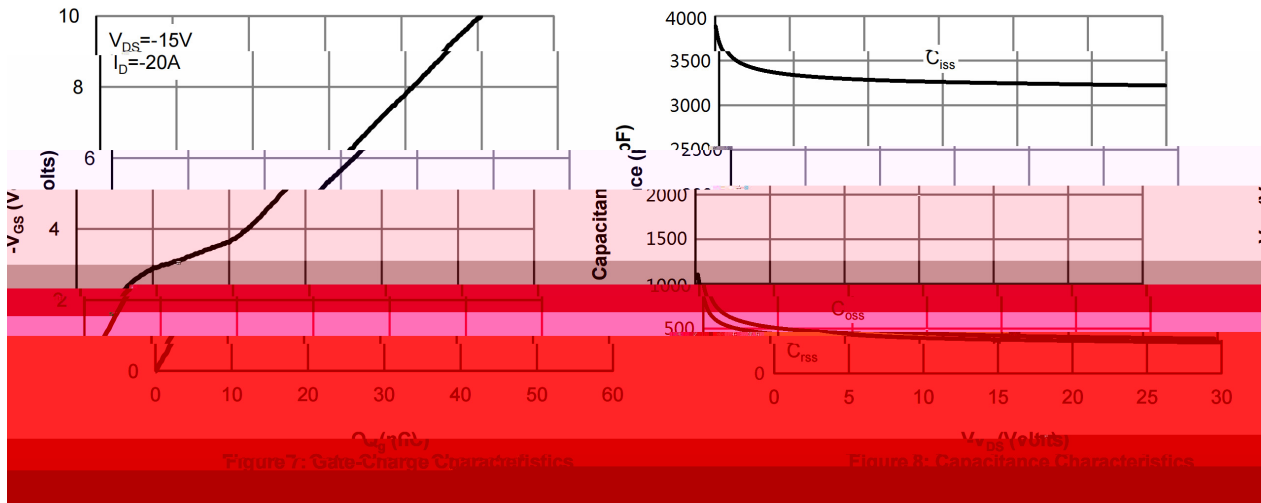


ed Safe

Figure 9: Maximum Forward Bias Operating Area

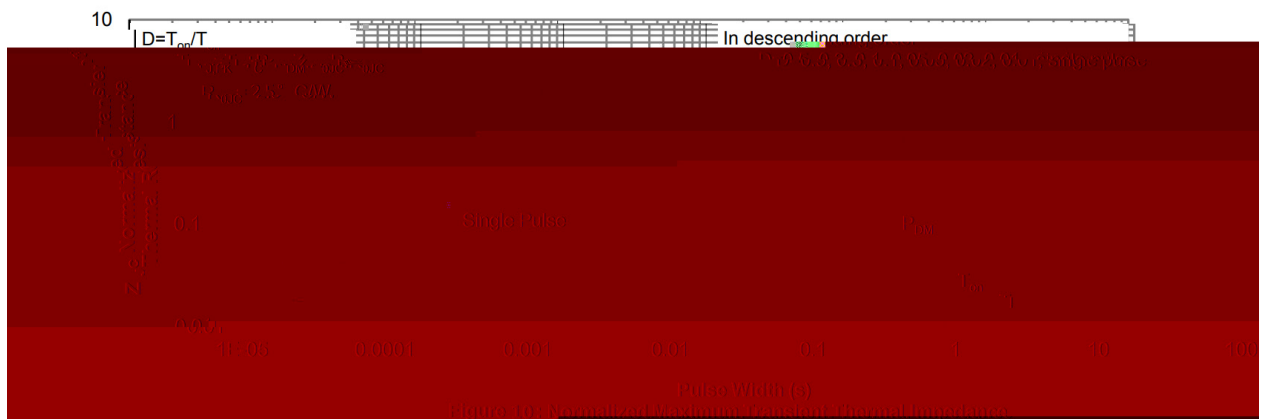


PDFN5 X6


Unit:mm

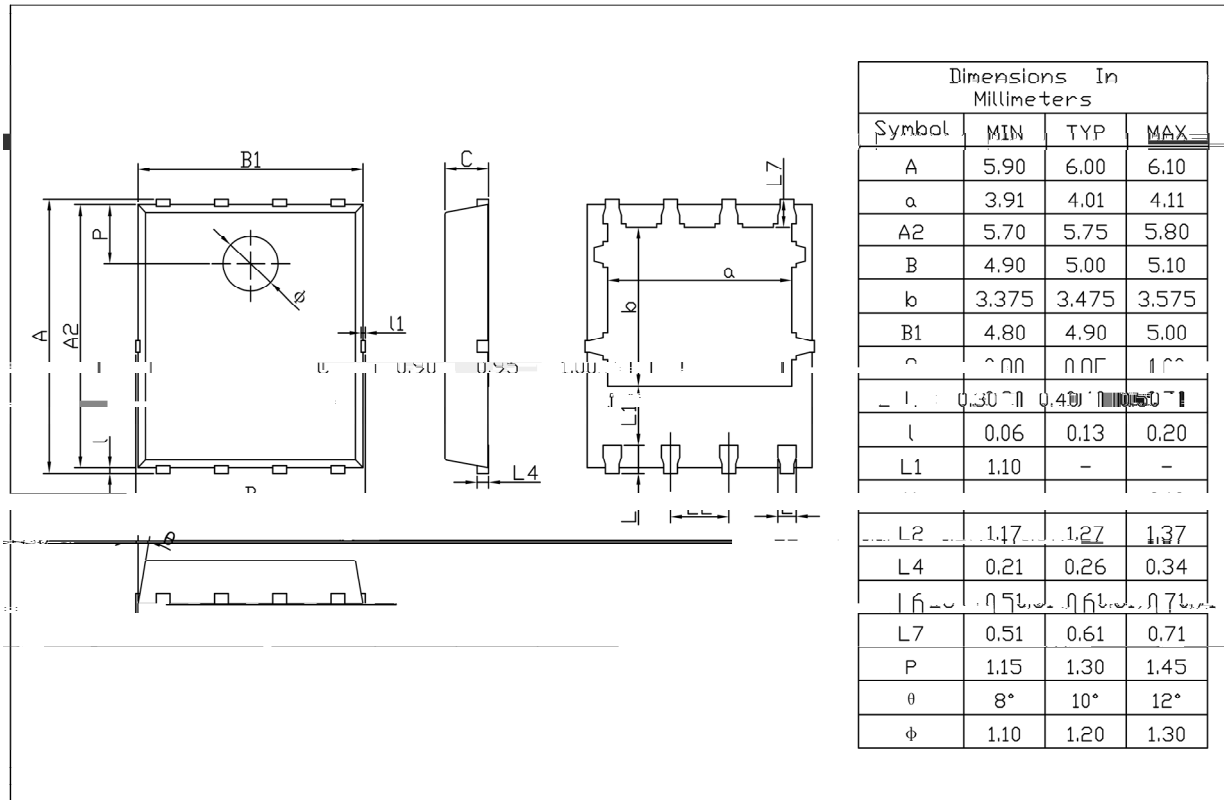

Rev.01 202209

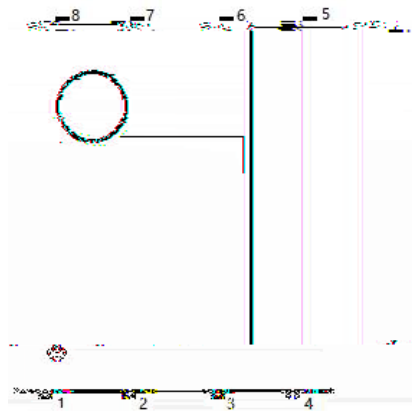

BR

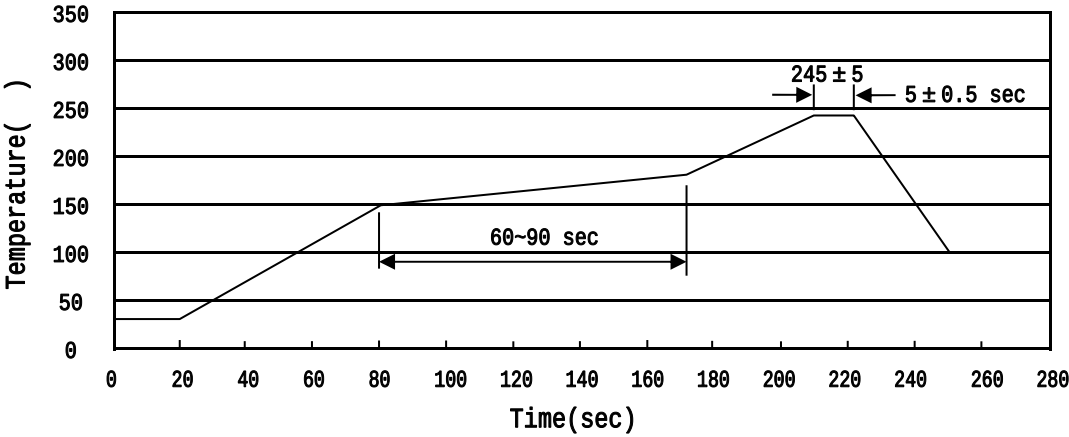

±

±

±

±

±

±

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box