

[illegible]


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning

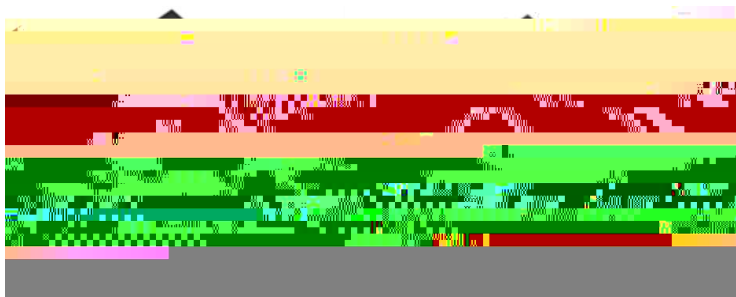


Pin	极性
1	S
2	S
3	S
4	G
5	D
6	D
7	D
8	D

/ h_{FE} Classifications & Marking



1 7


		±	

/ Electrical Characteristic Curve

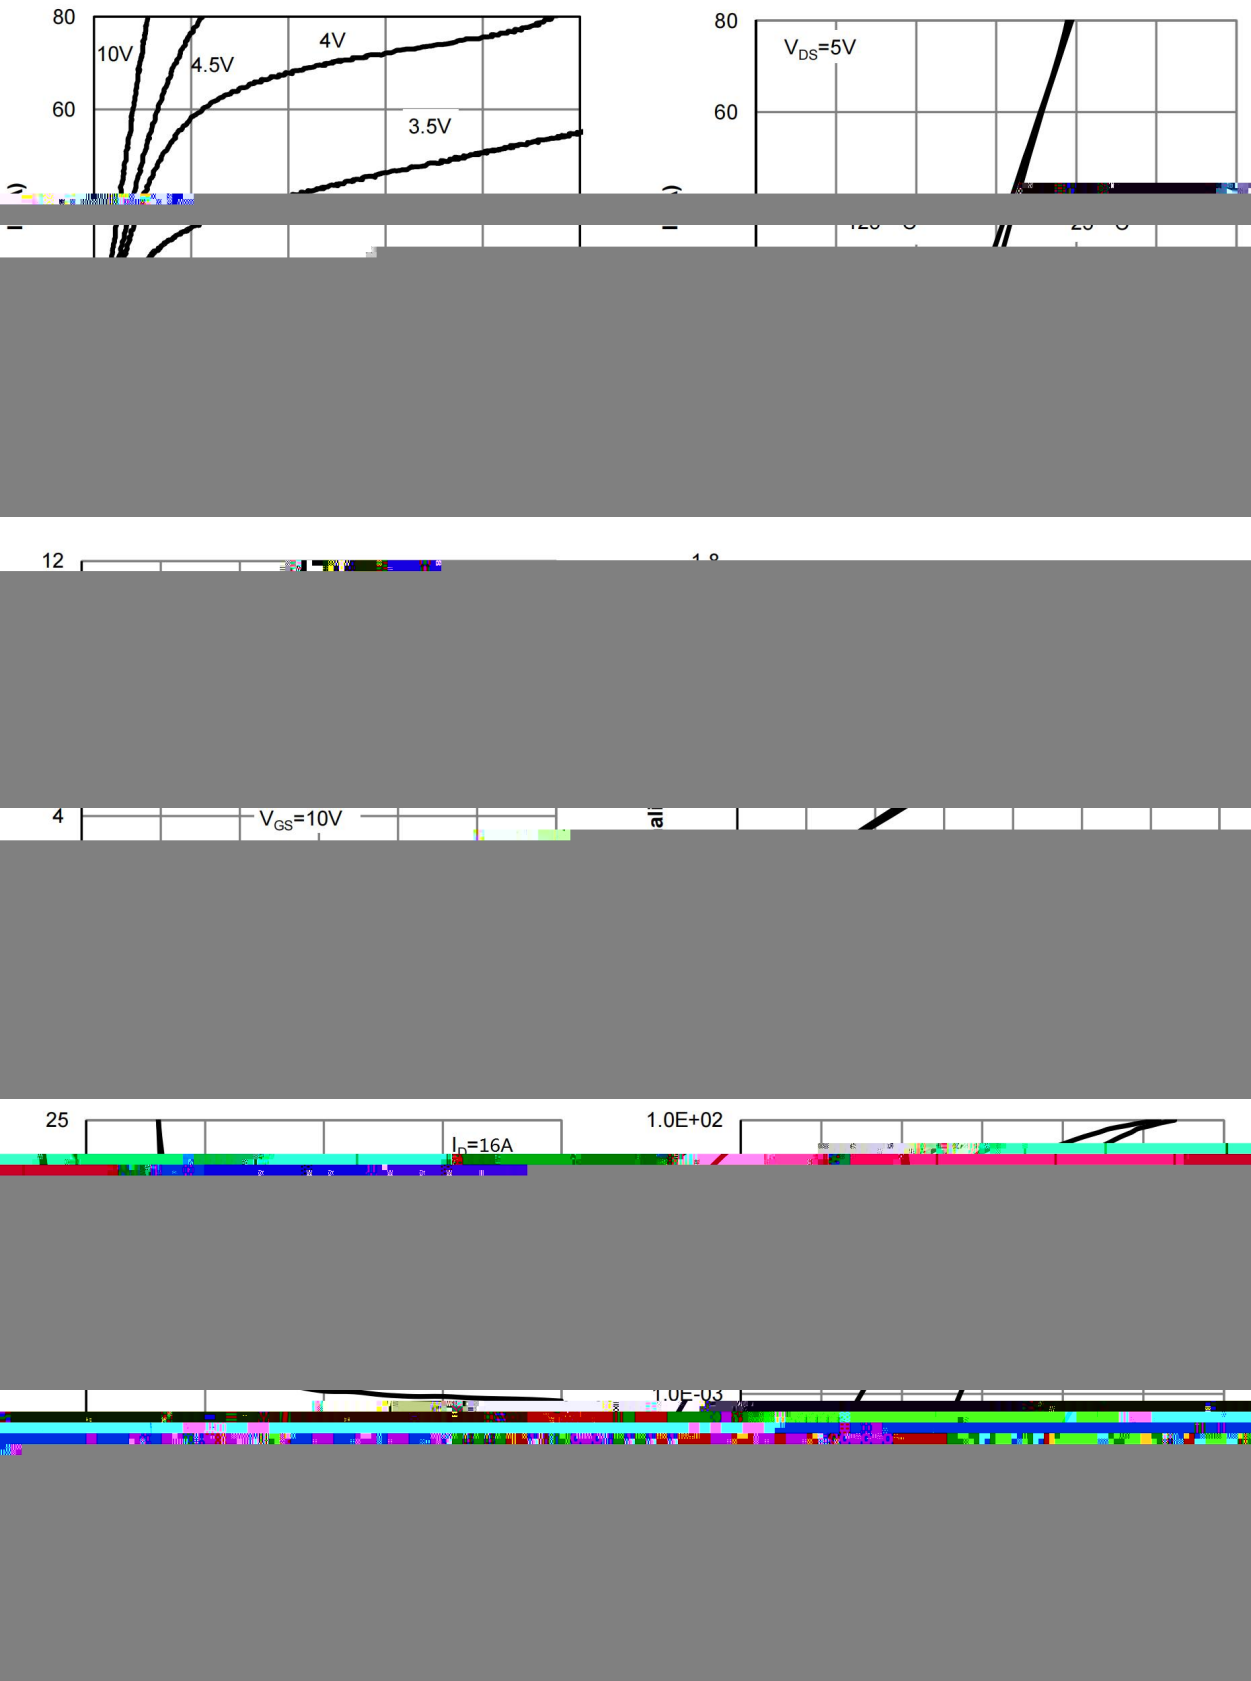


/ Electrical Characteristic Curve

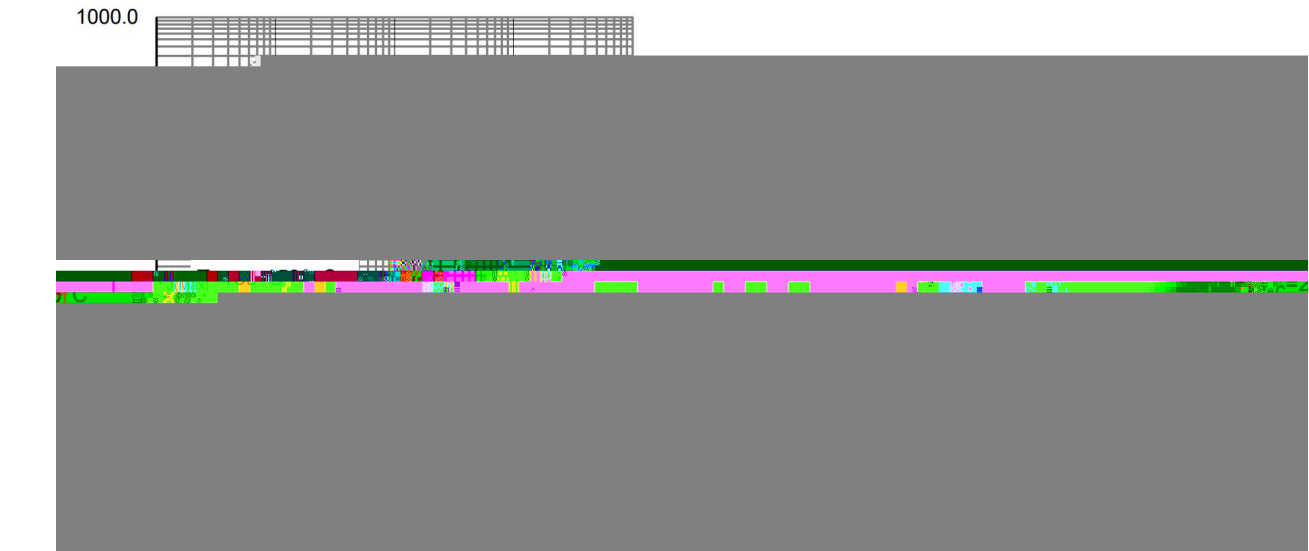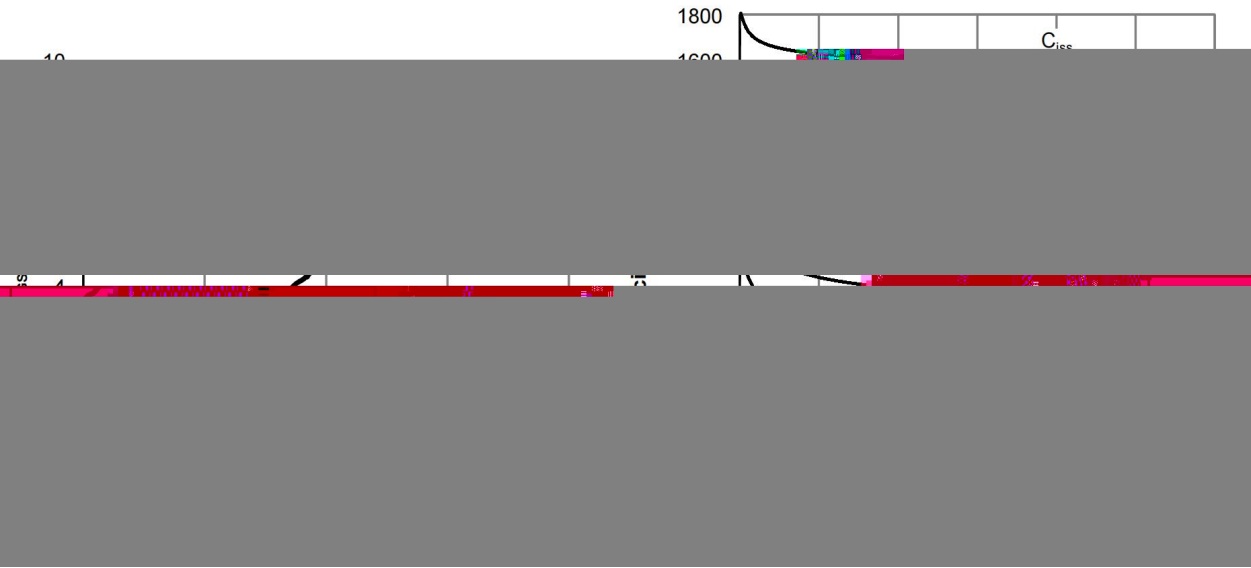




/ Package Dimensions

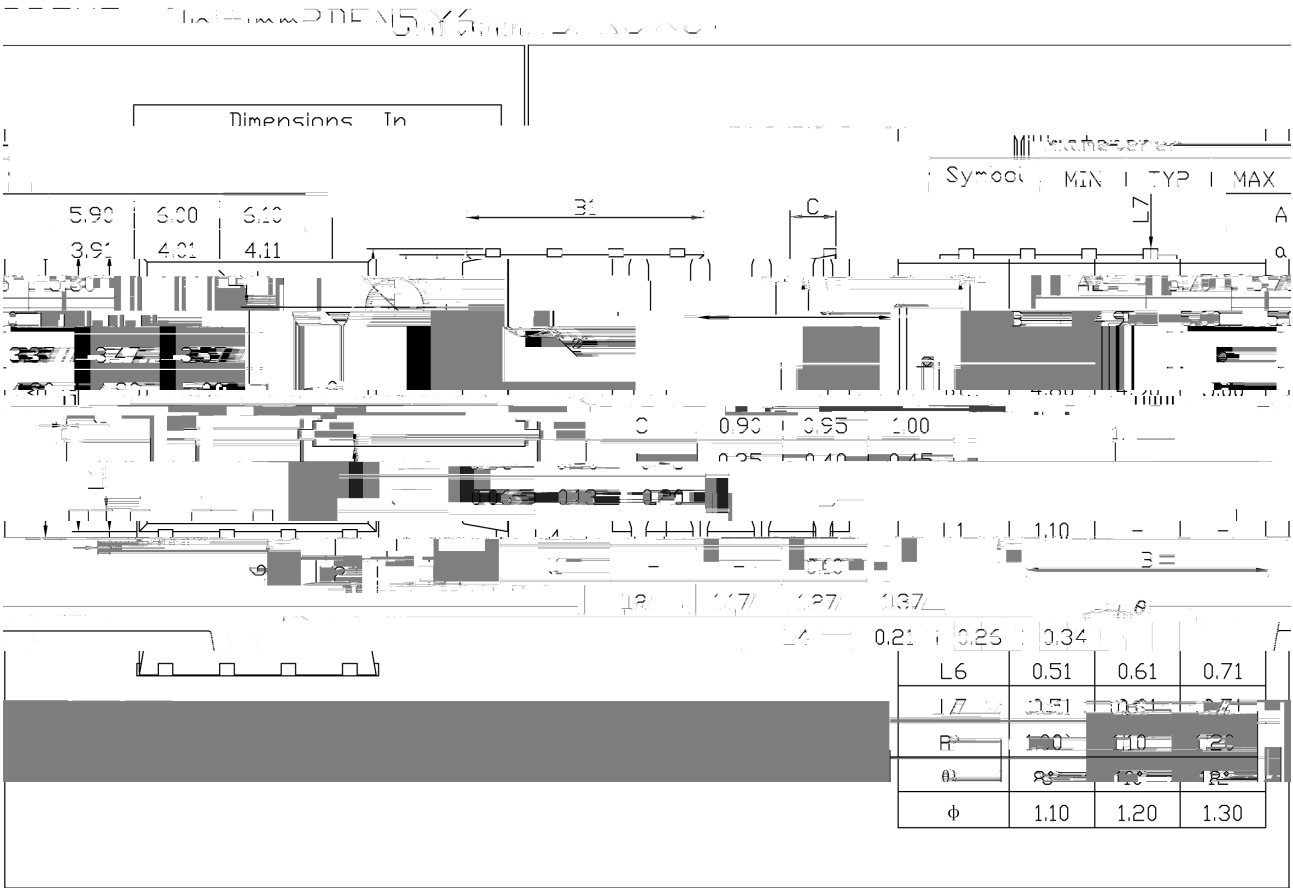


Rev.00 201812

/ Marking Instructions

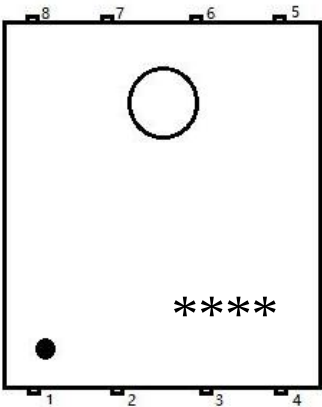

说明：
BR： 为公司代码
 ： 为为产品型号

 ：
 ：
 ：

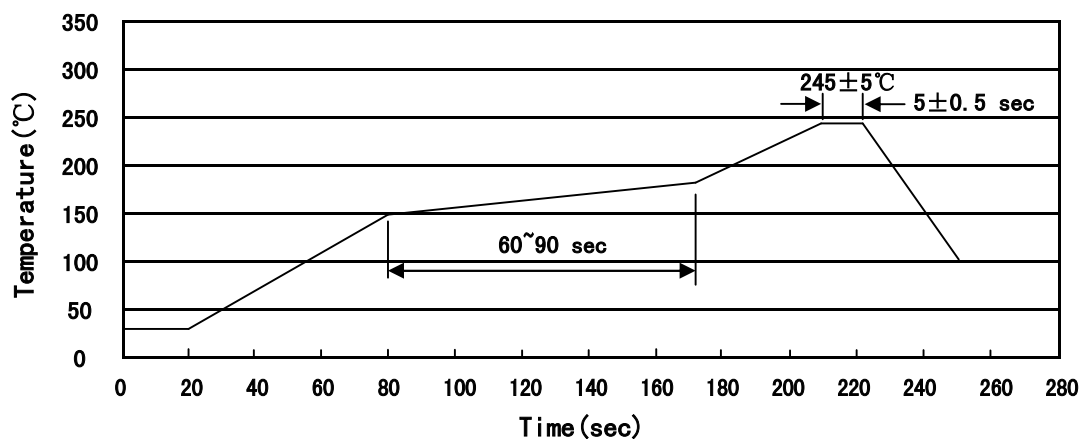
$$\begin{array}{ccccccc} & & & & ^\circ \text{C} & & \\ \pm & & \pm & & \pm & ^\circ \text{C} & \pm \\ & ^\circ \text{C} & & & & ^\circ \text{C} & \end{array}$$

/ Resistance to Soldering Heat Test Conditions

$$\pm \text{ }^{\circ}\text{C} \qquad \qquad \qquad \pm \qquad \qquad \qquad \text{ }^{\circ}\text{C}$$

/ Packaging SPEC.

封装形式	包装数量					包装尺寸 :		
	只/卷盘	卷盘/盒	只/盒	盒/箱	只/箱	盒		箱
						x	x x	x x

/ Notices