


BRCS120P04ZC

Rev.A Jul.-2022



A	2022.07.15	All	AOS-AONS21307		

/ Descriptions 代

PDFN5×6 P
P-Channel MOSFET in a PDFN5×6 Plastic Package.


/ Features

Low $R_{DS(ON)}$ to minimize conductive loss;low Gate Charge for fast switching;Low Thermal resistance;
HF Product.


/ Applications

/ Notebook AC-in load switch, Battery Protection Charge/Discharge.

/ Equivalent Circuit



/ Pinning

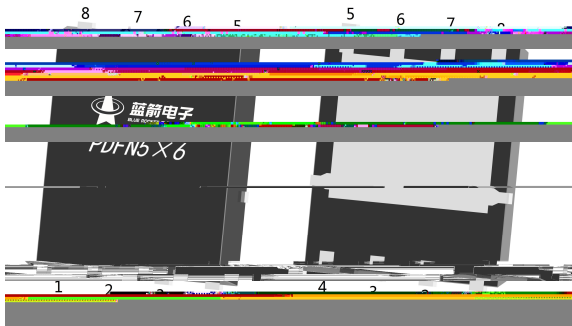

PIN1、2、3: S PIN4: G PIN5、6、7、8: D

Pin	极性
1	S
2	S
3	S
4	G
5	D
6	D
7	D
8	D

/ Marking

见印章说明。
See Marking Instructions.

BRCS120P04ZC

Rev.A Jul.-2022




参

Parameter	 Symbol	Rating	Unit
Drain-Source Voltage	V_{DS}	-40	V
Drain Current - Continuous	$I_D(T_c=25^{\circ}\text{C})$	-45	A
Drain Current – Pulsed	I_{DM}	-120	A
Gate-Source Voltage	V_{GS}	± 20	V
Power Dissipation	$P_D(T_c=25^{\circ}\text{C})$	40	W


Single Pulse Avalanche Energy

BRCS120P04ZC
Rev.A Jul

/ Electrical Characteristic Curve 性能

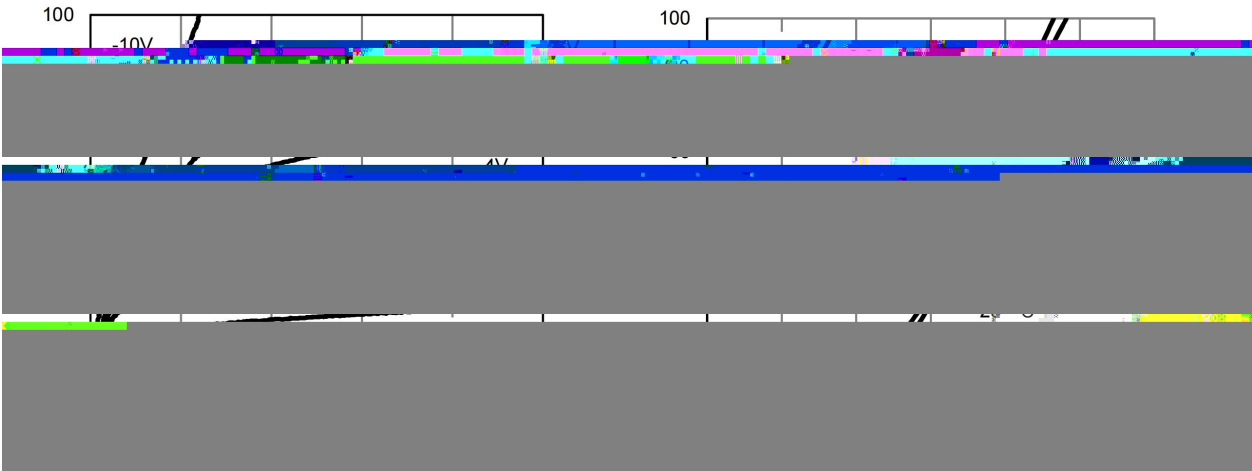


I Package Dimensions 能

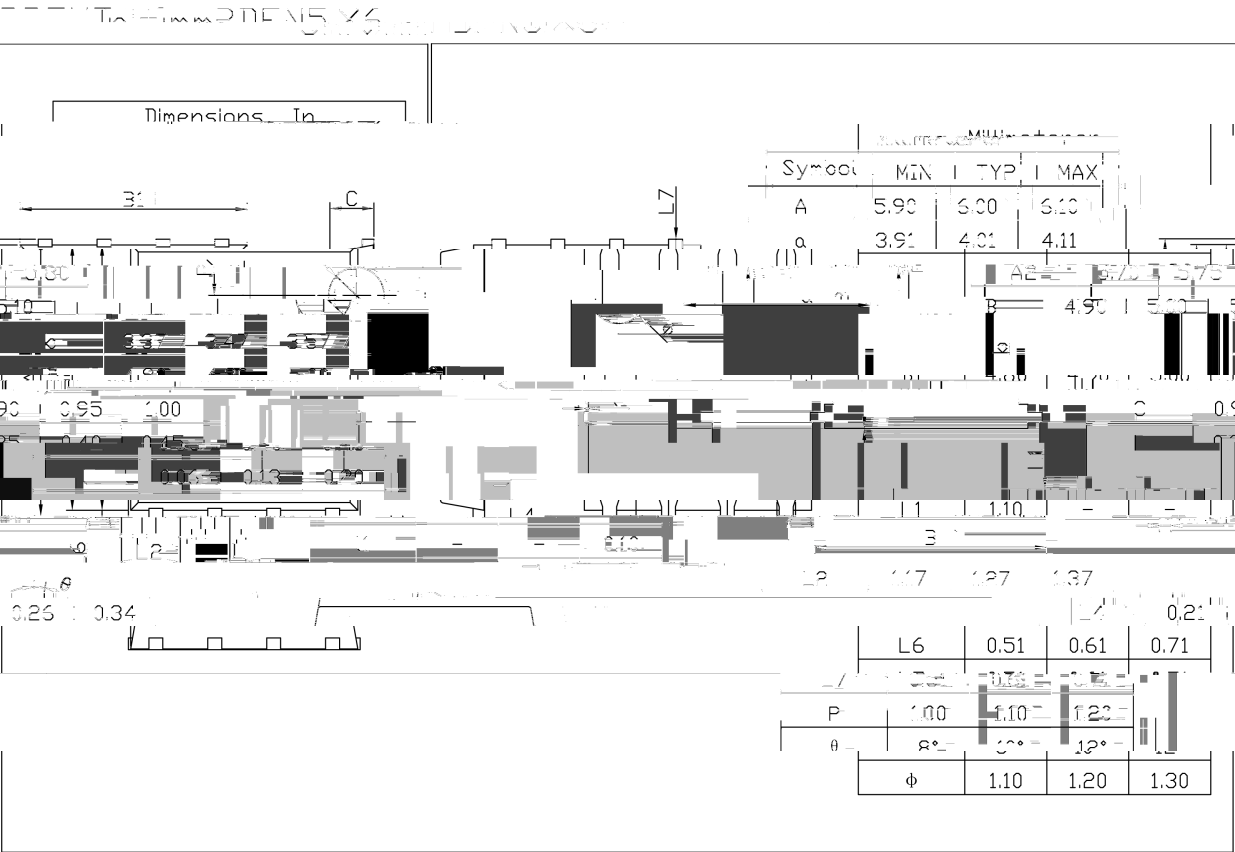

Rev.00 201812

/ Marking Instructions

形状

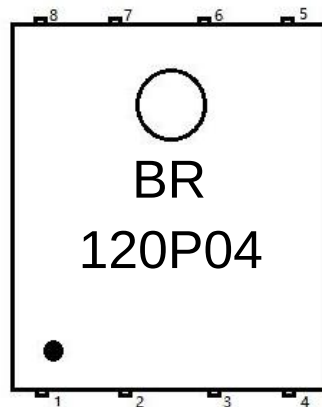

说明：

BR： 为公司代码

120P04： 为产品型号

****： 为生产批号代码，随生产批号变化


Note：

BR： Company Code

120P04： Product Type

****： Lot No. Code, code change with Lot No

() / Temperature Profile for Reflow Soldering(Pb-Free)

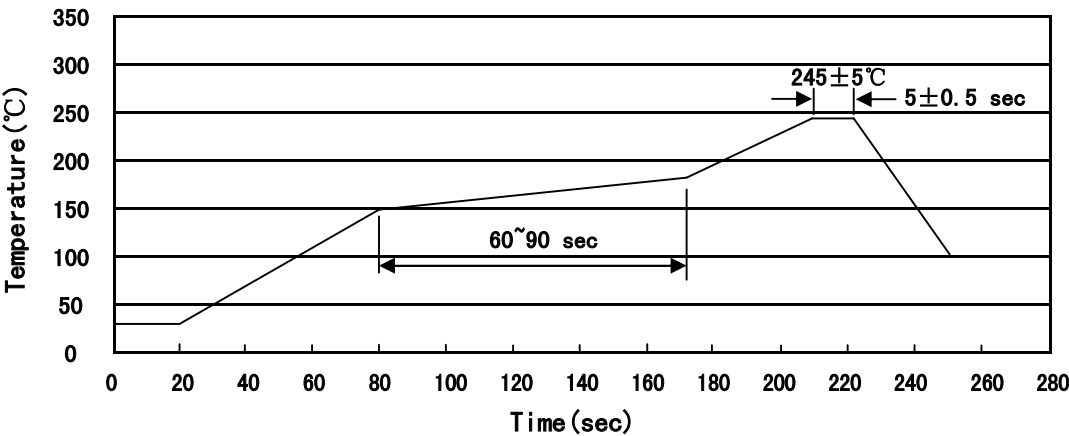

Note:

- | | | | | | |
|---|-------|-----|-----------|-----------|--|
| 1 | 150 | 180 | 60 | 90sec; | 1.Preheating:150~180°C, Time:60~90sec. |
| 2 | 245±5 | | | 5±0.5sec; | 2.Peak Temp.:245±5°C, Duration:5±0.5sec. |
| 3 | | 2 | 10°C/sec. | | 3. Cooling Speed: 2~10°C/sec. |

/ Resistance to Soldering Heat Soldering Conditions

260±5°C 10±1 sec. Temp.:260±5°C Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
PDFN5 × 6	5000	2	10000	6	60000	13" × 12	360 × 360 × 50	380 × 335 × 366

/ Notices

形