


/ Descriptions

/ Features


$\leq$	Ω	Ω
$\leq$	Ω	Ω

/ Applications

/ Equivalent Circuit



/ Pinning

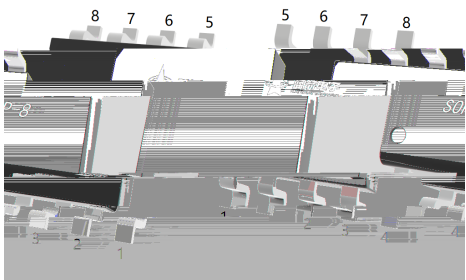




/ Marking

[illegible]

/ Electrical Characteristics(Ta=25)

		μ					
		μ					
						Ω	
						Ω	
						μ	
		$\pm$			$\pm$		
						Ω	
		Ω Ω					

/ Electrical Characteristic Curve

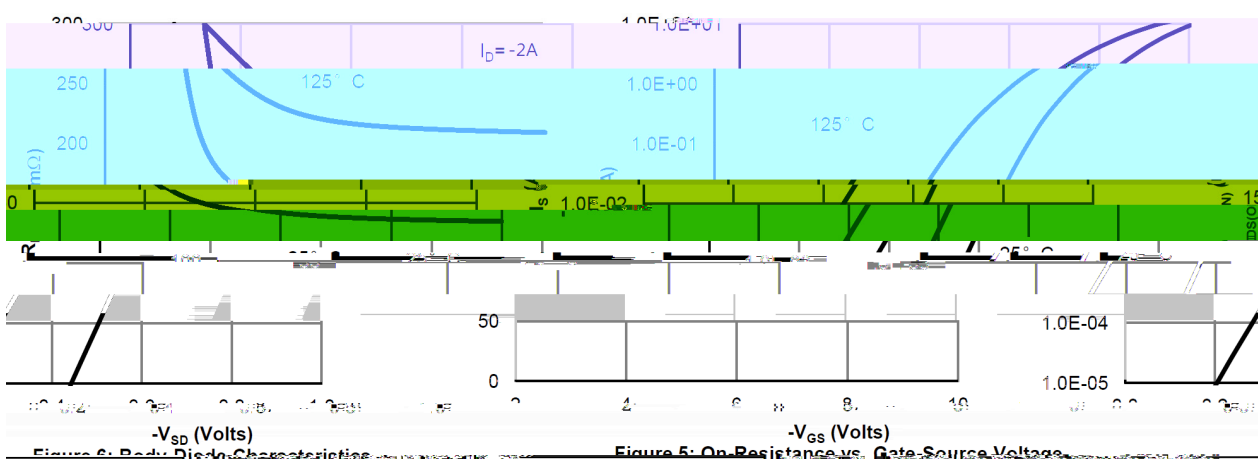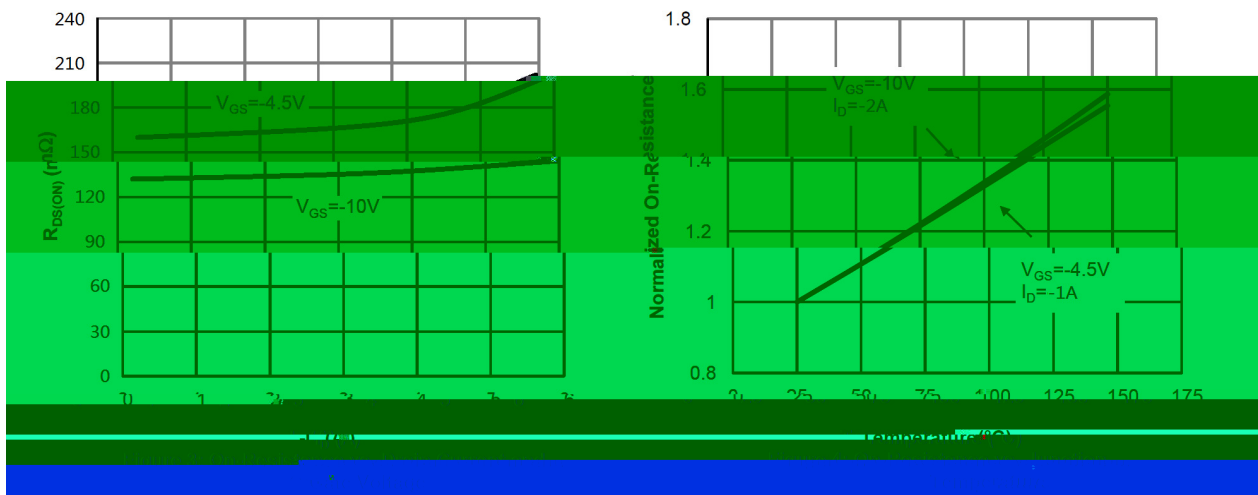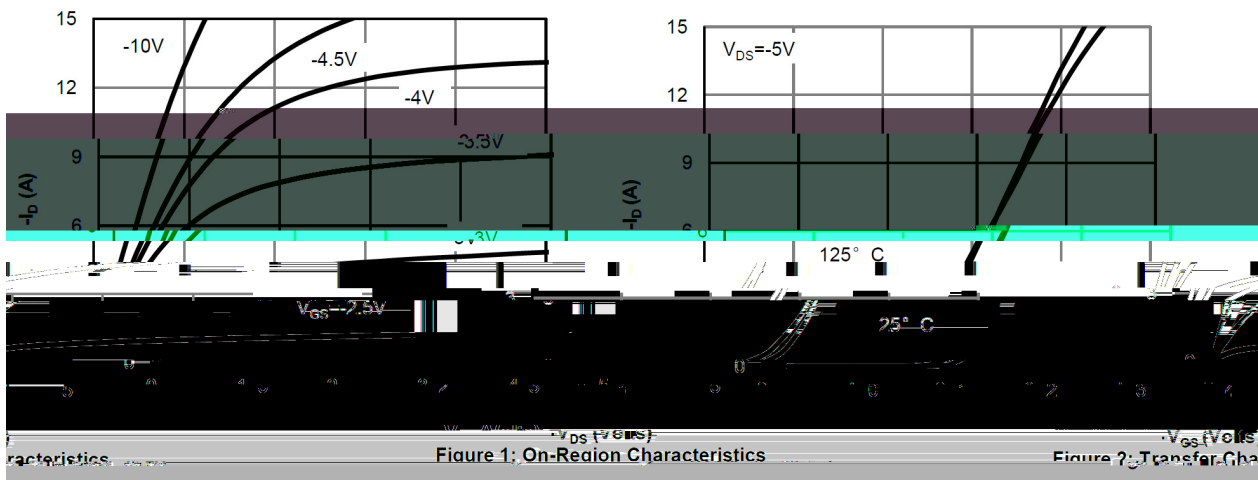

Electrical Characteristic Curve




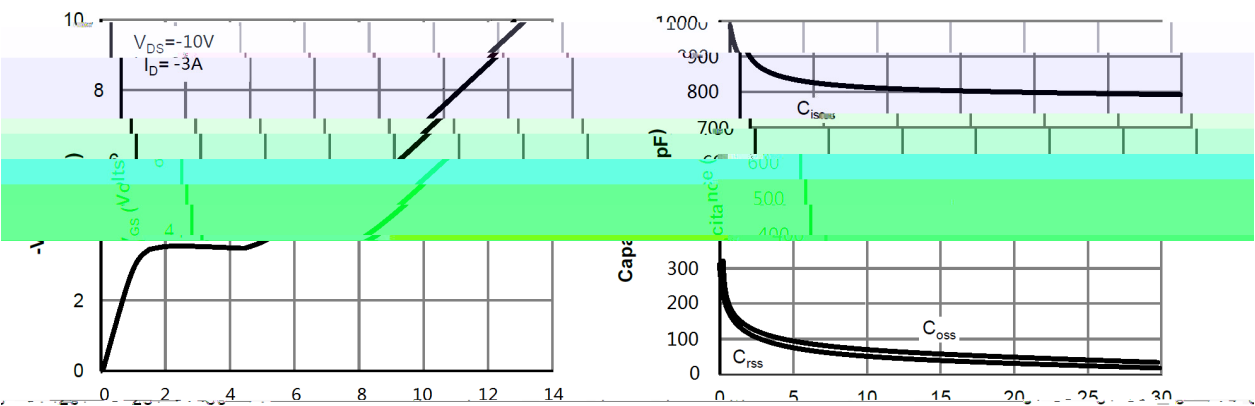



Figure 7: Gate-Charge Characteristics Figure 8: Capacitance Characteristics

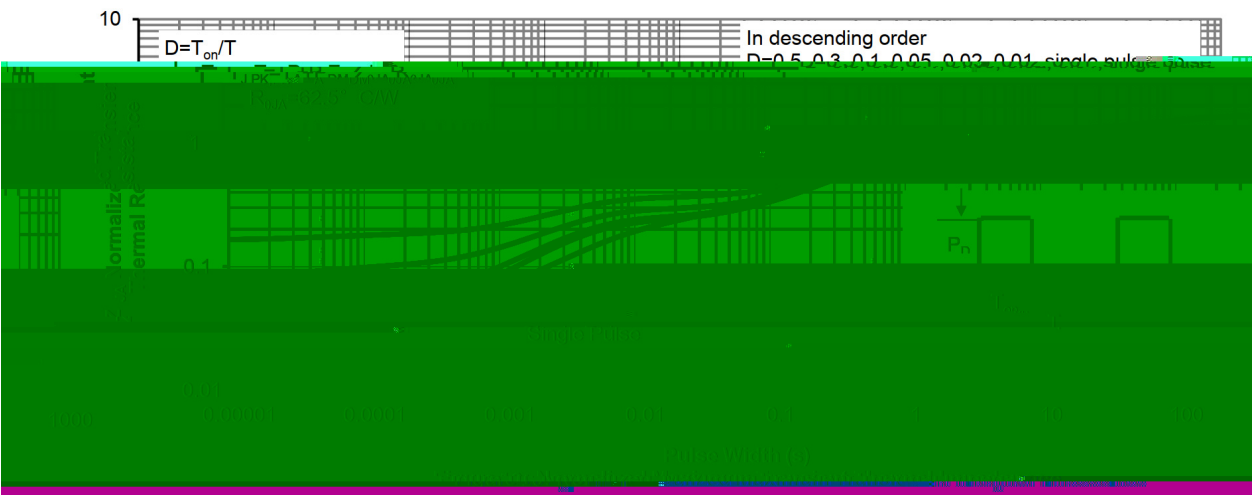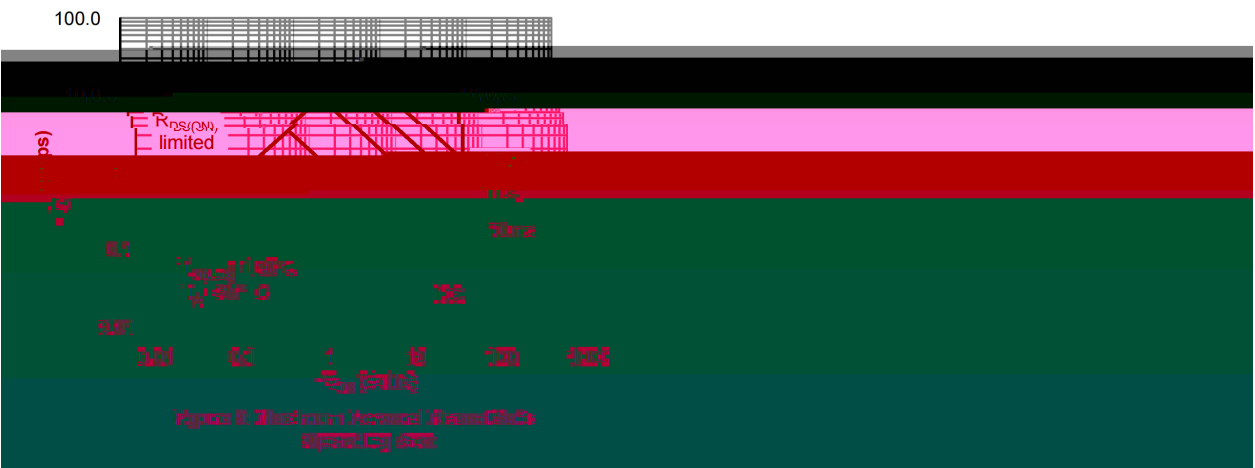


/ Package Dimensions

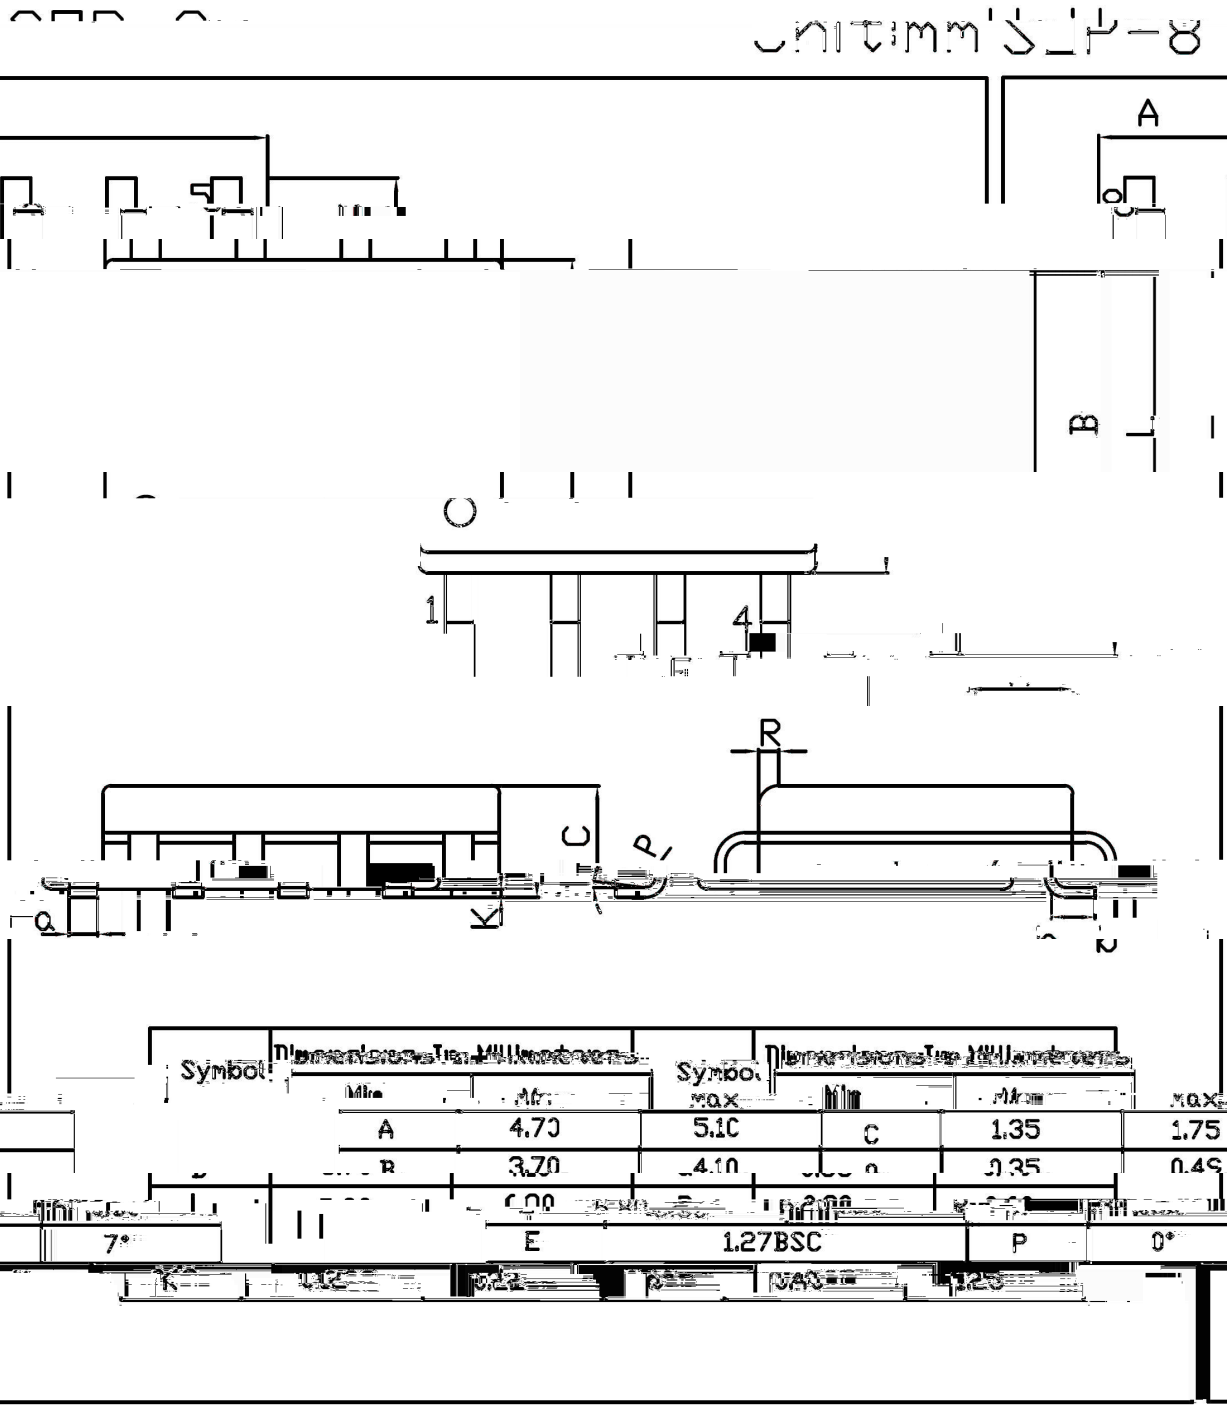

/ Marking Instructions

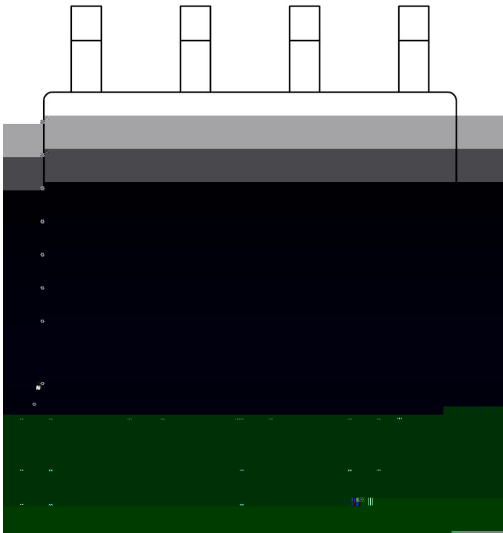



() / Temperature Profile for IR Reflow Soldering(Pb-Free)

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

--	--	--