

/ Descriptions


P

/ Features


$\leq$ Ω Ω $\leq$ Ω Ω

/ Applications

/ Equivalent Circuit




/ Pinning

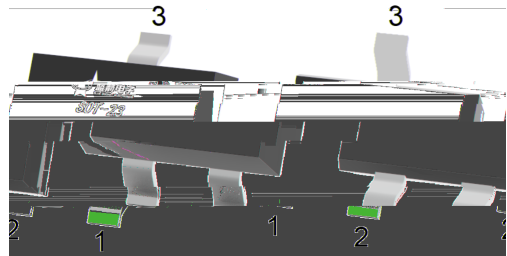

/ Marking

--	--



	θ		

/ Electrical Characteristics(Ta=25)

		Ω				

/ Electrical Characteristic Curve

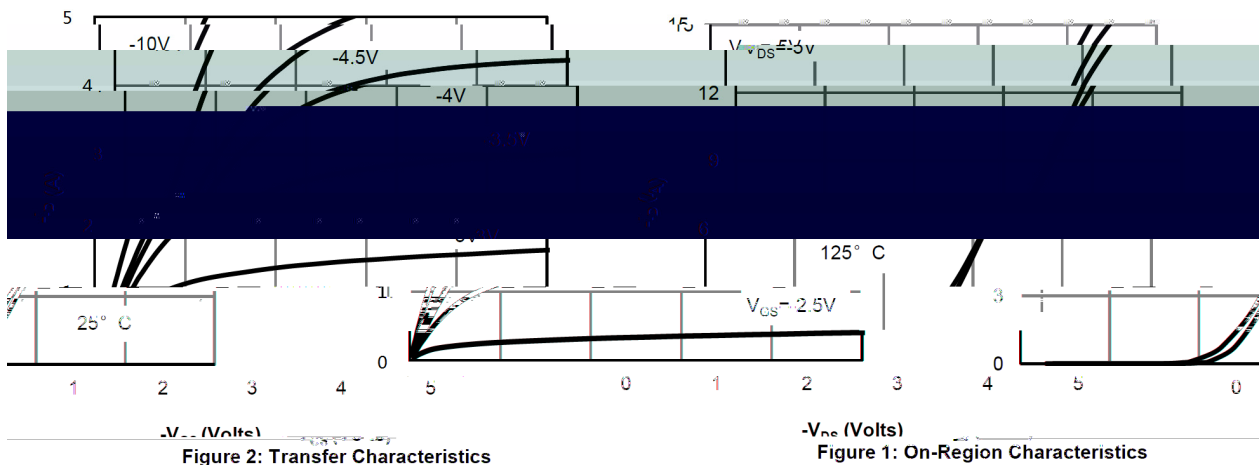


Figure 2: Transfer Characteristics

Figure 1: On-Region Characteristics

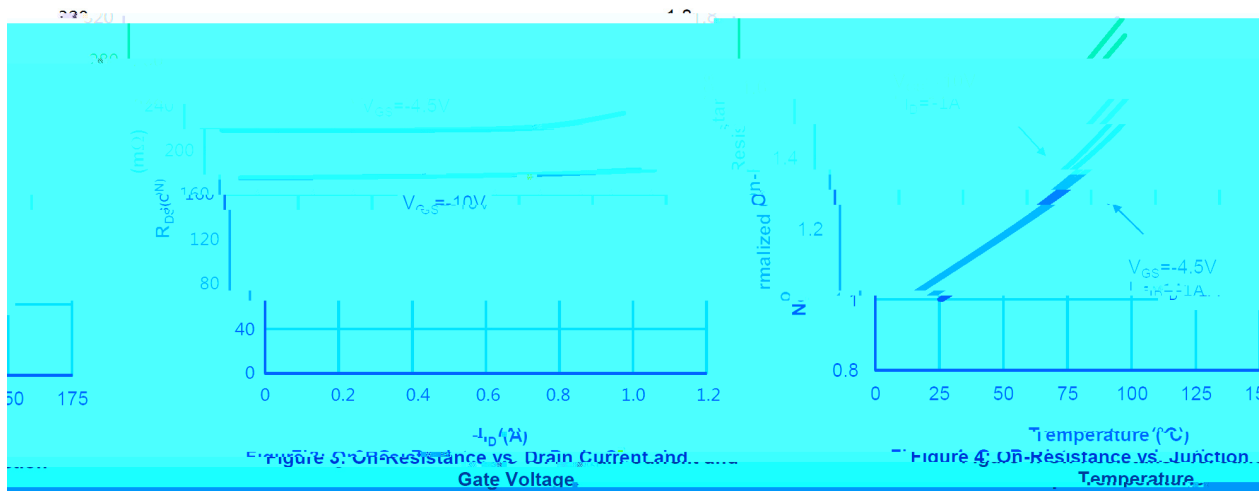


Figure 3: On-Resistance vs. Drain Current

Figure 4: On-Resistance vs. Junction Temperature




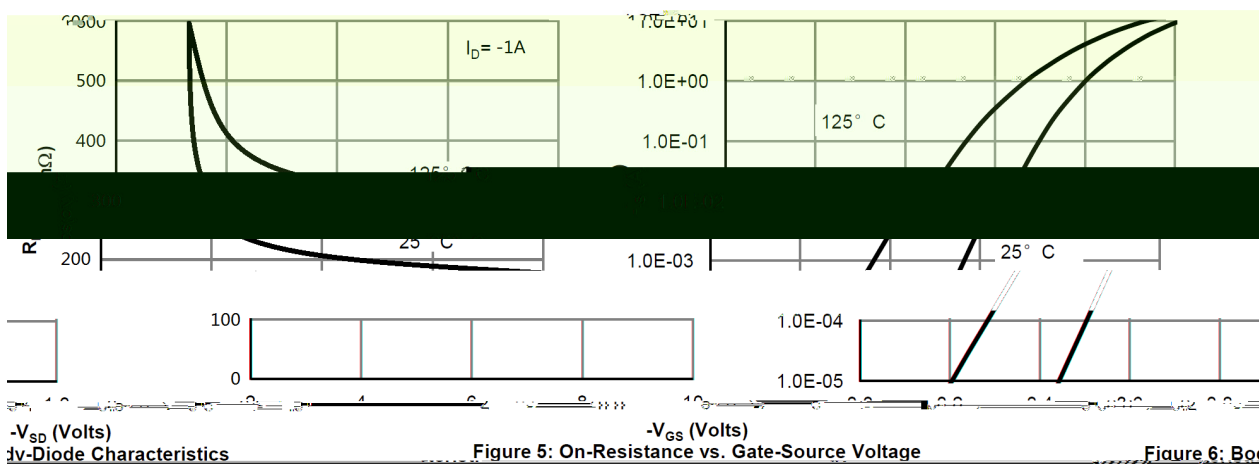


Figure 5: On-Resistance vs. Gate-Source Voltage


Figure 6: Body Diode Characteristics

/ Electrical Characteristic Curve

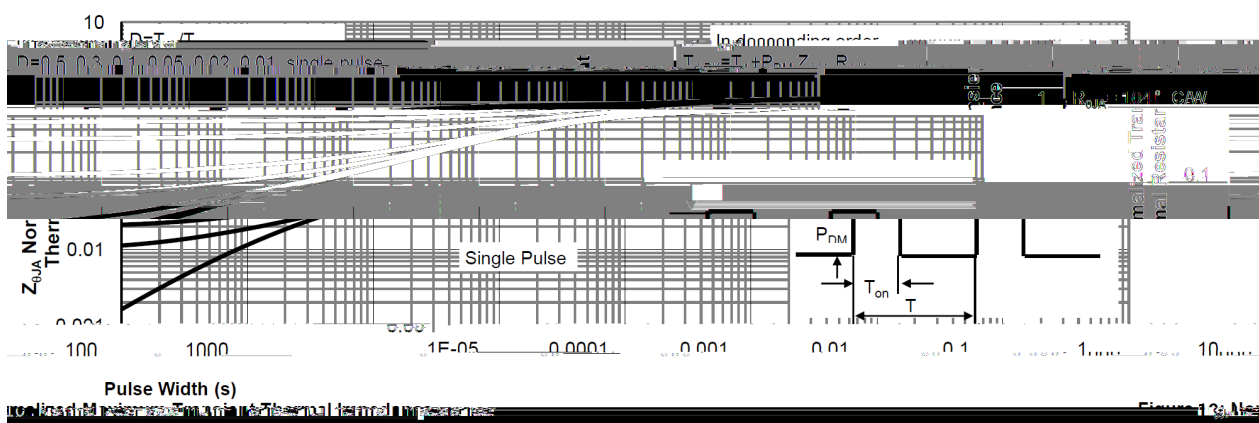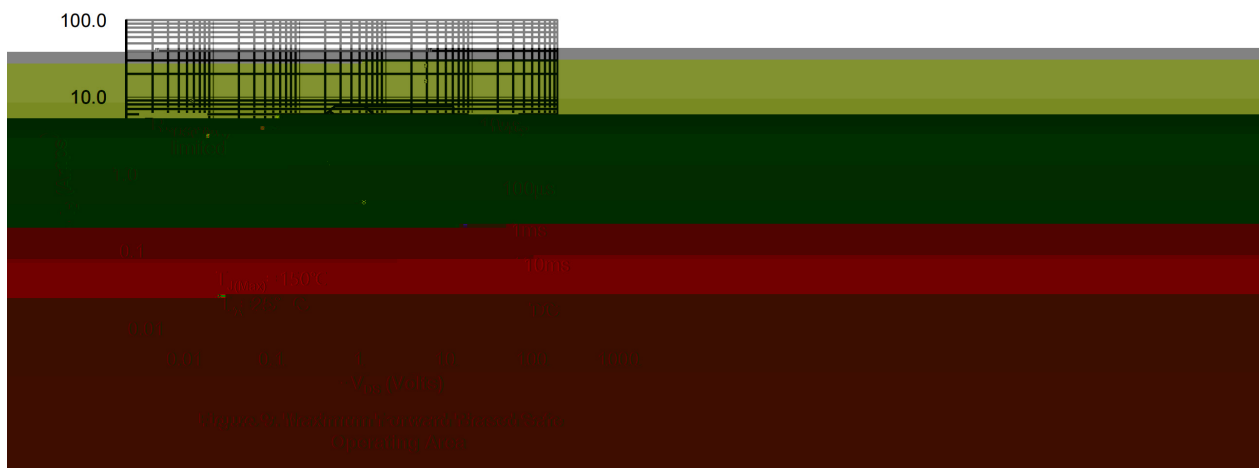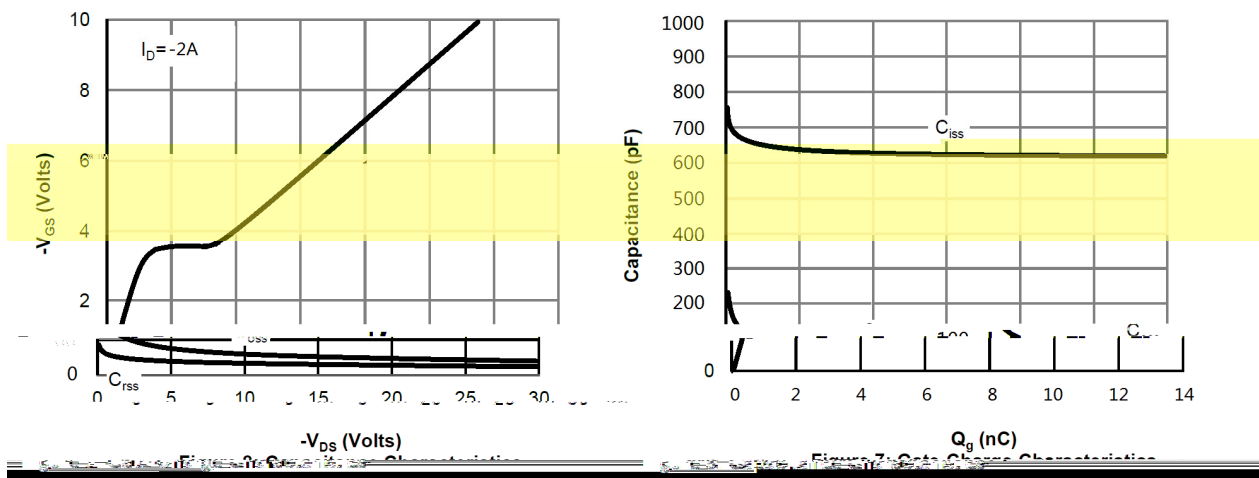


BRCS1C8P06MA

/ Marking Instructions

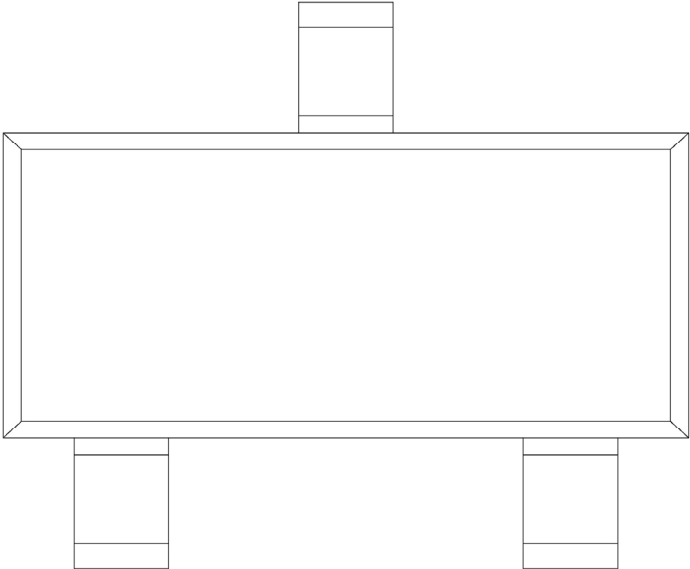

() /

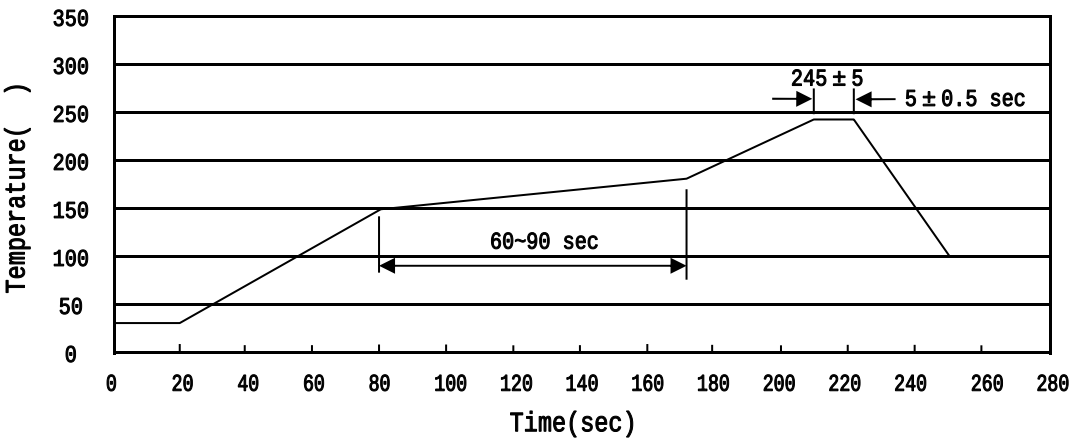

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱

/ Notices