

Rev.A May.-2023

N-Channel Enhancement Mode Field Effect Transistor in a PDFN3 3A-8L Plastic Package.



$V_{DS}=40V$ $I_D=21A$

$R_{DS(ON)}@10V<20m$ (Typ.18mR)

$R_{DS(ON)}@4.5V<35m$ (Typ.24mR)

HF Product.

Motor Drive,Power Tools,LED Lighting,Quick Charger.

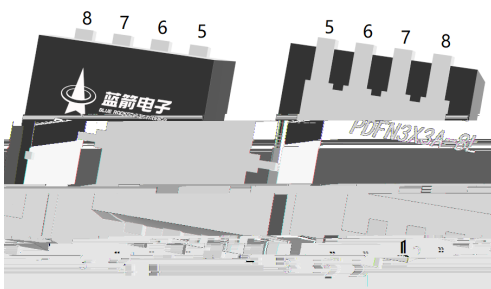

出脚	定义
Pin1	S
Pin2	S
Pin3	S
Pin4	G
Pin5	D
Pin6	D
Pin7	D
Pin8	D

See Marking Instructions.

Parameter		Symbol	Rating	Unit
Drain-Source Voltage		V_{DS}	40	V
Drain Current		$I_D(T_C=25^\circ\text{C})$	21	A
Drain Current - Pulsed		I_{DM}	42	A
Gate-Source Voltage		V_{GS}	± 20	V
Power Dissipation		$P_D(T_C=25^\circ\text{C})$	15	W
Operating and Storage Temperature Range		T_J, T_{stg}	-55 to 150	
Junction-to-Ambient	Steady-State	$R_{\theta JA}$	80	/W
Junction-to-Case	Steady-State	$R_{\theta JC}$	8.3	

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	BV_{DS}	$V_{GS}=0V$ $I_D=250\mu A$	40	45		V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=40V$ $V_{GS}=0V$			1.0	μA
Gate-Body leakage current	I_{GSS}	$V_{GS}=\pm 20V$ $V_{DS}=0V$			± 100	nA
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}$ $I_D=250\mu A$	1	1.8	3	V
Static Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS}=10V$ $I_D=6.0A$		18	20	m Ω
		$V_{GS}=4.5V$ $I_D=5.0A$		24	35	m Ω
Diode Forward Voltage	V_{SD}	$V_{GS}=0V$ $I_S=1.0A$			1.2	V
Input Capacitance	C_{iss}	$V_{DS}=25V$ $V_{GS}=0V$ $f=1.0MHz$		1200		pF
Output Capacitance	C_{oss}			350		pF

Reverse TrJc8(05ef204.48 265.04 .48001fTj2 0 0 0 0 72(3)22.8408 25c0 T.0023 .623 Tw(iiss)Tj10.4958 0 0 10.8 0 12

/

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Turn-On Delay Time	$t_{d(on)}$	$V_{DS}=20V$ $V_{GS}=10V$ $R_L=3.3\Omega$ $R_{GEN}=3\Omega$		6.5		ns
Turn-On Rise Time	t_r			3.7		ns
Turn-Off Delay Time	$t_{d(off)}$			18.2		ns
Turn-Off Fall Time	t_f			7.1		ns






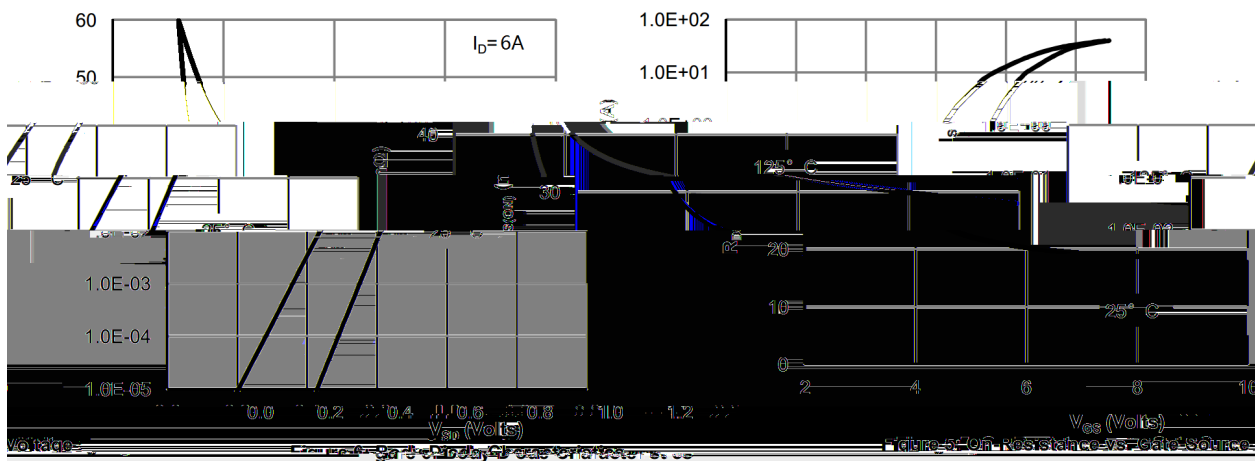


Figure 4: On-Resistance vs. Gate-Source Voltage


Figure 5: On-Resistance vs. Gate-Source Voltage

Rev.A May.-2023

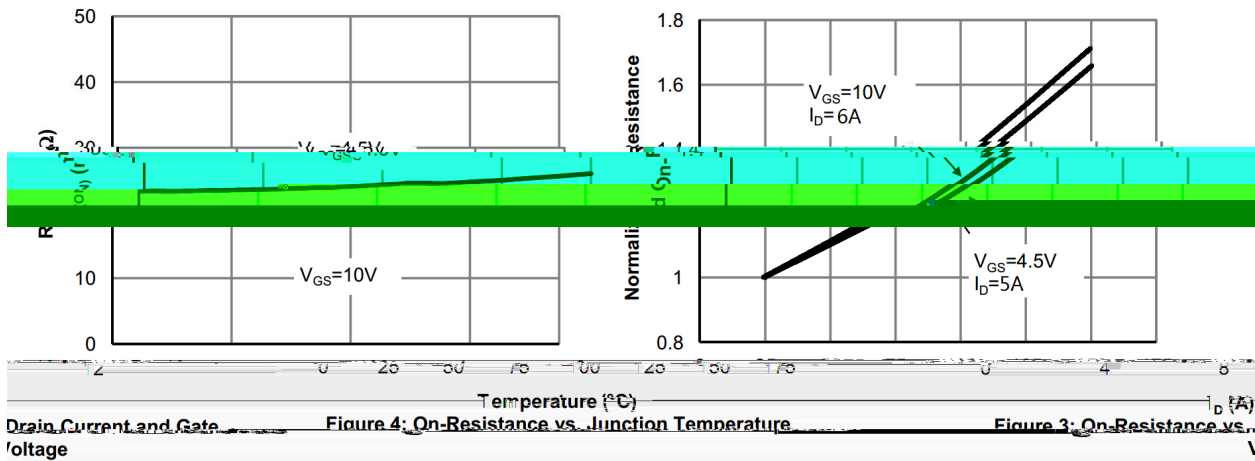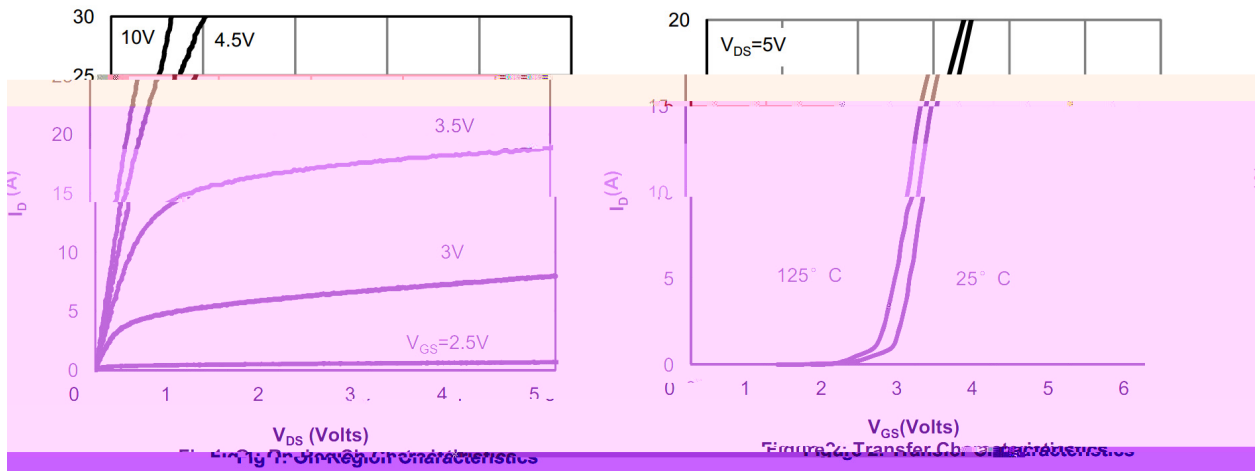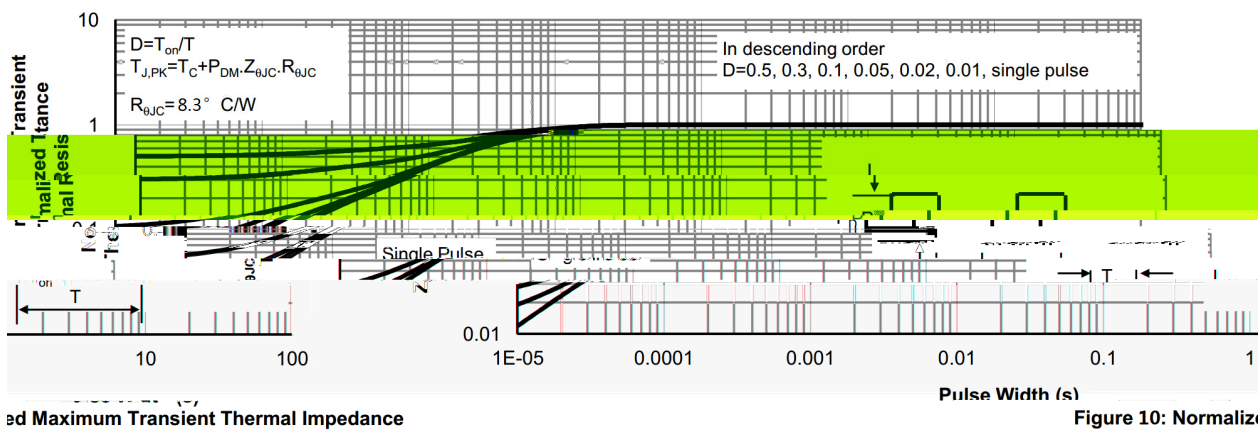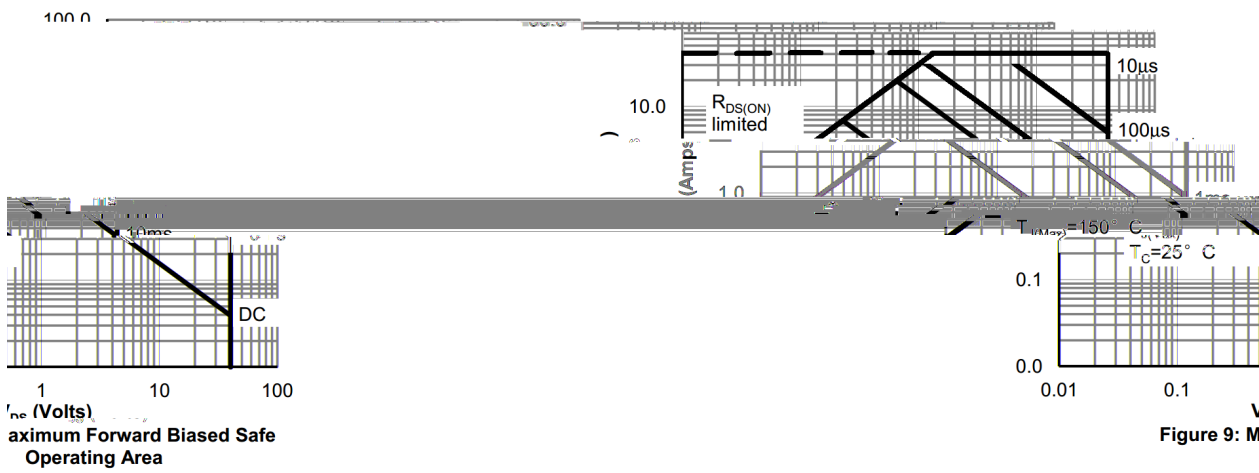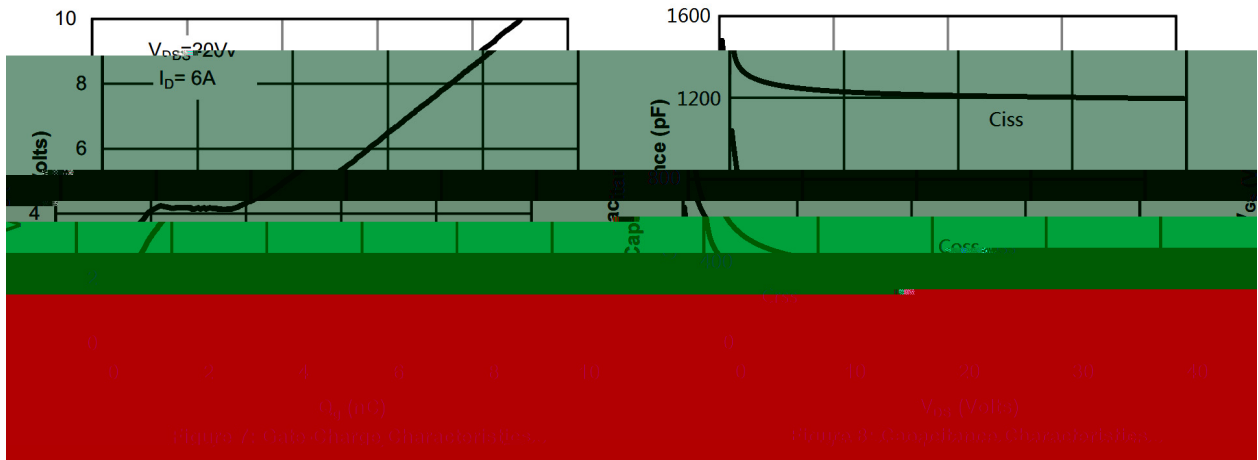


PDFN3X3A-8L

Unit:mm

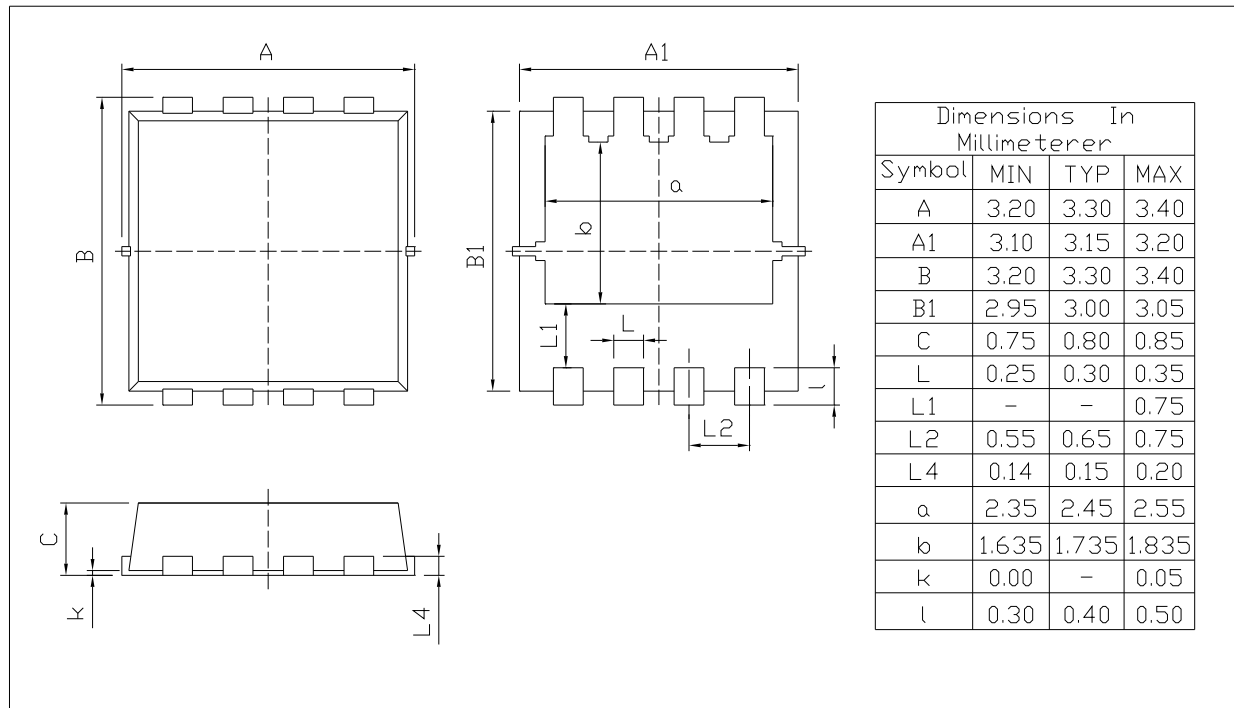

Rev.00 202011

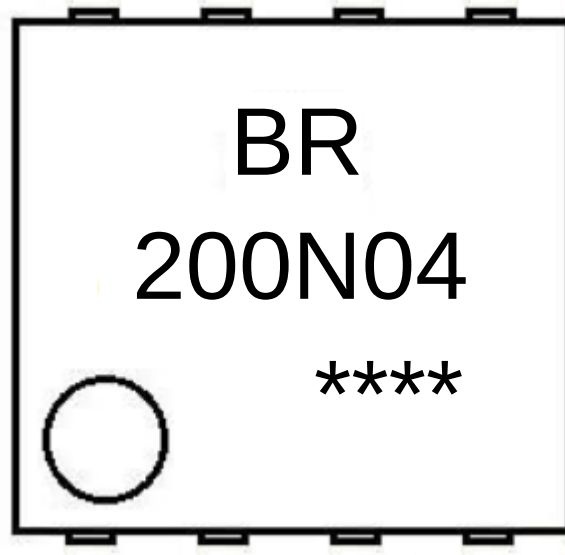

BR

200N04

Note:

BR: Company Code

200N04: Product Type Code

****: Lot No. Code, code change with Lot No

Temperature Profile for IR Reflow Soldering(Pb-Free)

Note:

- | | | | | | |
|---|-----|-----|----|---------|---|
| 1 | 150 | 180 | 60 | 90sec; | 1.Preheating:150~180 , Time:60~90sec. |
| 2 | 245 | 5 | 5 | 0.5sec; | 2.Peak Temp.:245 5 , Duration:5 0.5sec. |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

260	5	10	1 sec.	Temp.:260±5	Time:10±1 sec
-----	---	----	--------	-------------	---------------

/ REEL

Package Type	Units/Reel /	Reels/Inner Box /	Units	Dimension (unit mm ³)
--------------	-----------------	----------------------	-------	--------------------------------------