


F	2017-4				
G	2019-4-18	ALL	BRC2302MAG		
H	2020-1-2	1 5	G		


Rev.A Jun.-2022


Rev.A Jun.-2022

<http://>



Rev.A Jun.-2022

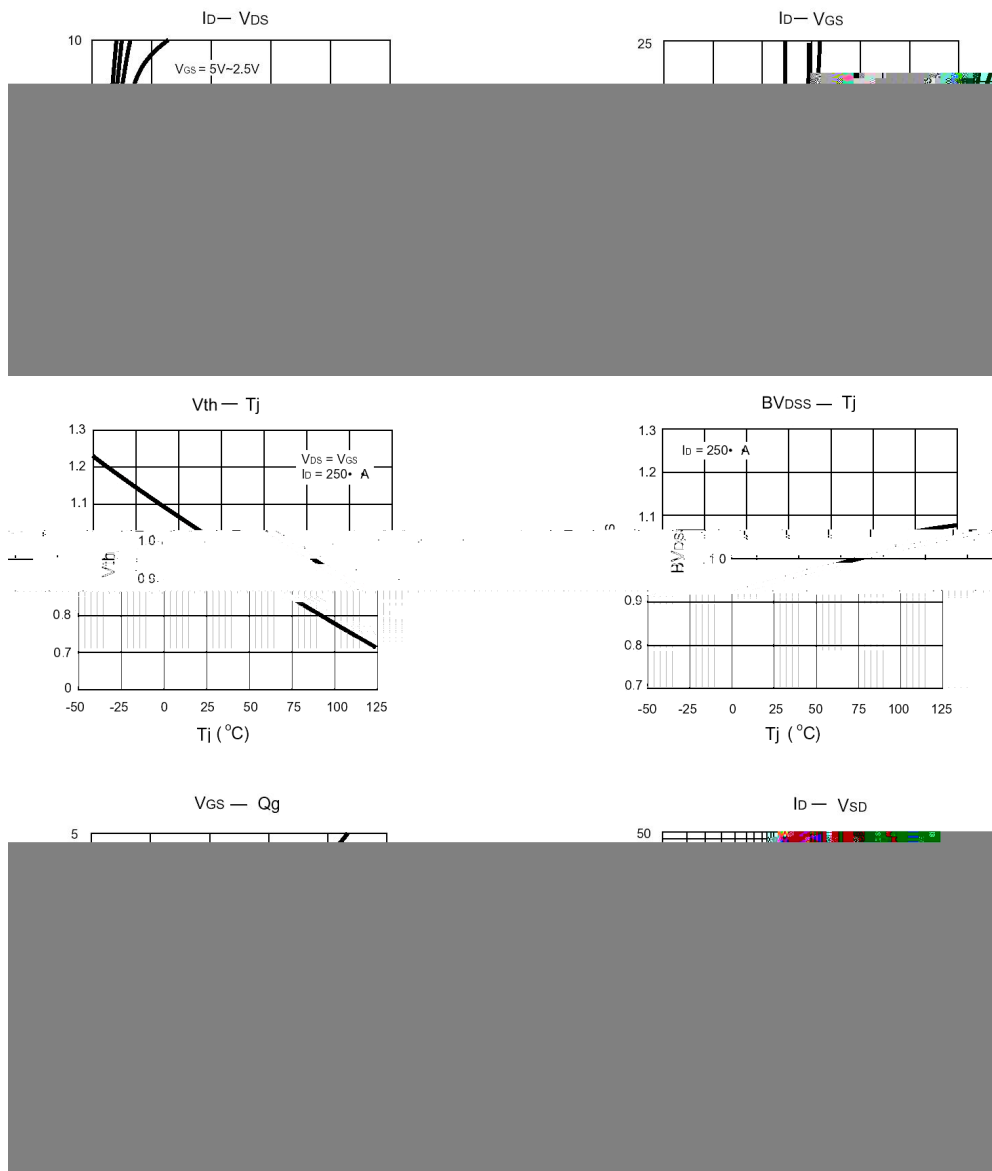






Rev.A Jun.-2022

FSBREC-23

FSBREC-23

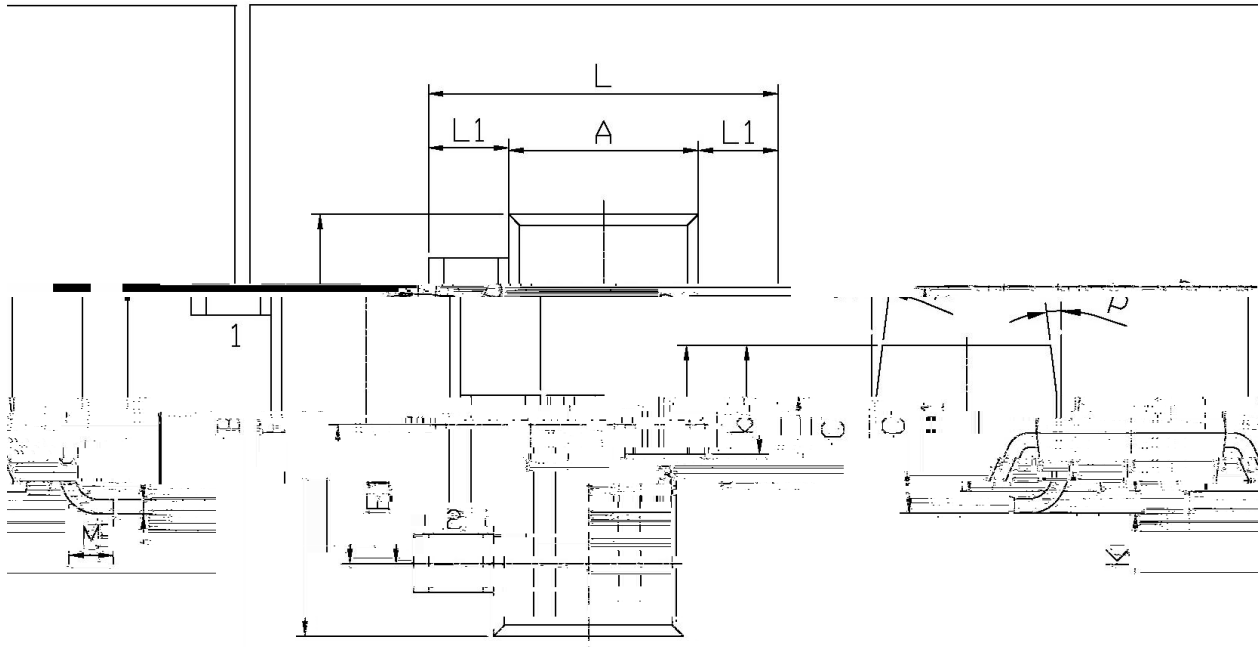

Dimensions In Millimeters			Dimensions In Millimeters		
Symbol	Min	Max	Symbol	Min	Max
L	2.2	2.7	C	1.30	Max
L1	0.45	0.65	C1	0.90	1.20
A	1.15	1.50	d	0.05	0.20
B	2.70	3.10	h	0	0.10
E	0.85	1.05	R	0.10	0.20
b	0.35	0.55			

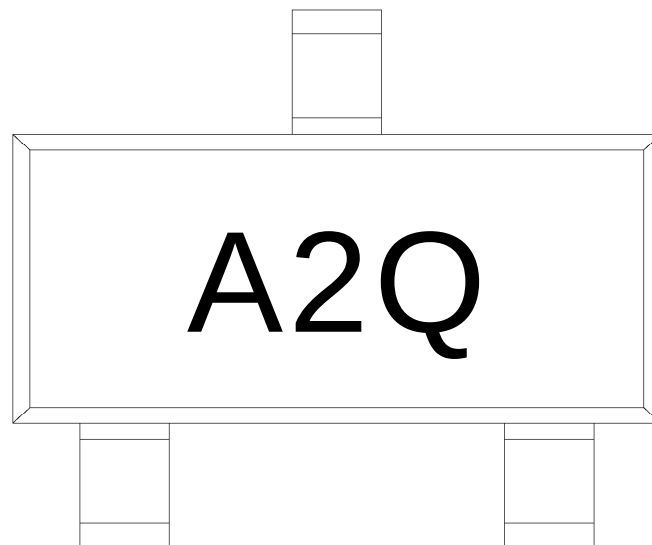

A2:

Q

Note:

A2 Product Type Code

Q: Automobile halogen-free product Code



Temperature Profile for IR Reflow Soldering(Pb-Free)

Note:

- 1

150 200

60 120sec;

1.Preheating:150~200°C, Time:60~120sec.
- 2

255±5

5±0.5sec;

2.Peak Temp.:255±5°C, Duration:5±0.5sec.
- 3

2

10°C/sec.

3. Cooling Speed: 2~10°C/sec.

260±5°C

10±1 sec.

Temp.:260±5°C

Time:10±1 sec

/ REEL

Package Type	Units					Dimension		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box	(unit mm ³) Outer Box