
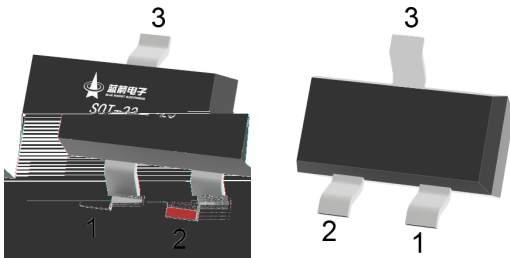


P

PWM



			~	℃
	≤	θ		℃
				℃
		θ		℃

		μ				
		μ				
						Ω
						Ω
						Ω
						μ
		±			±	
		℃				
						Ω
		Ω Ω				

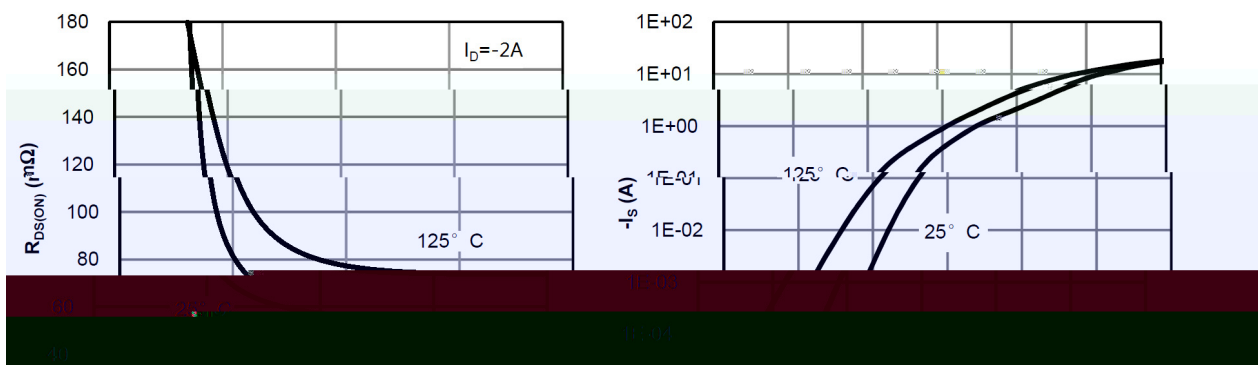
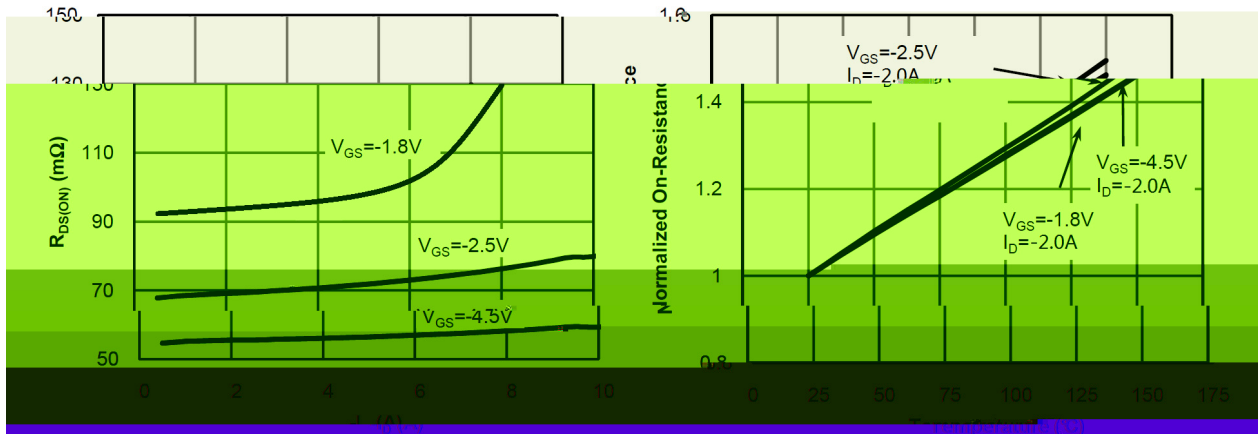
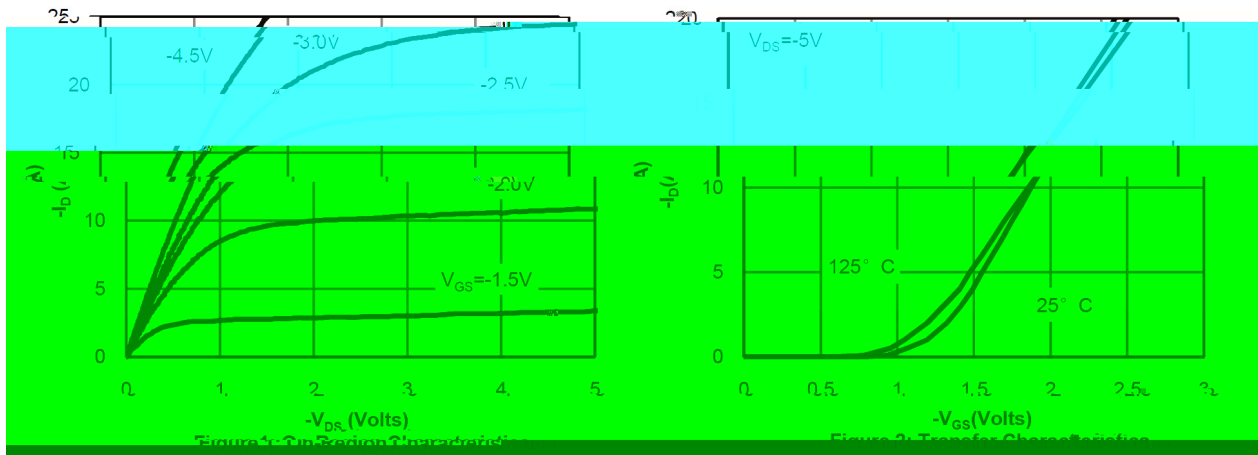


Figure 1: Drain Current vs. Drain-Source Voltage




Figure 2: Transfer Characteristics

Figure 3: On-Resistance vs. Drain Current and Gate Voltage

Figure 4: On-Resistance vs. Junction Temperature


Figure 5: On-Resistance vs. Drain Current and Junction Temperature


Figure 6: On-Resistance vs. Junction Temperature

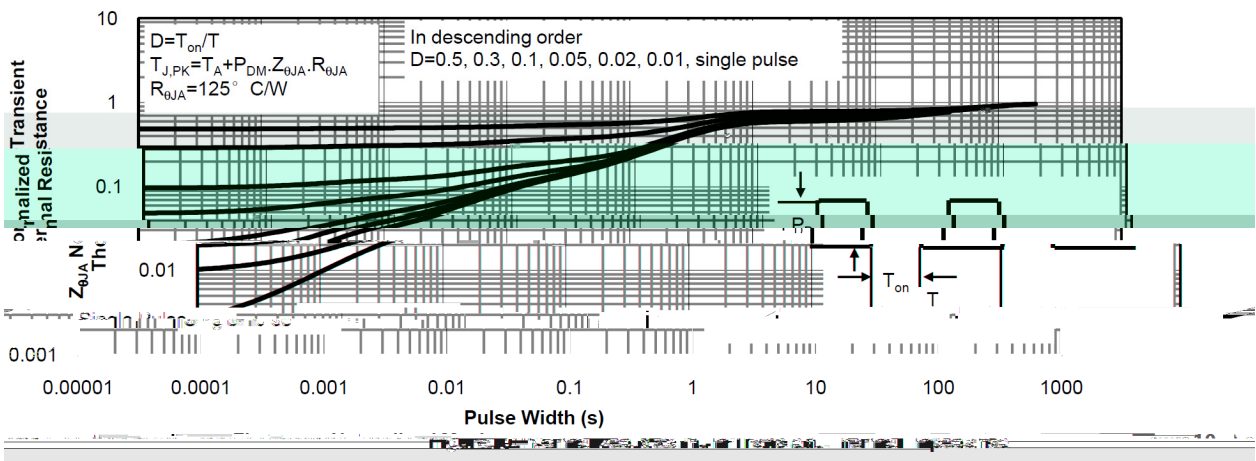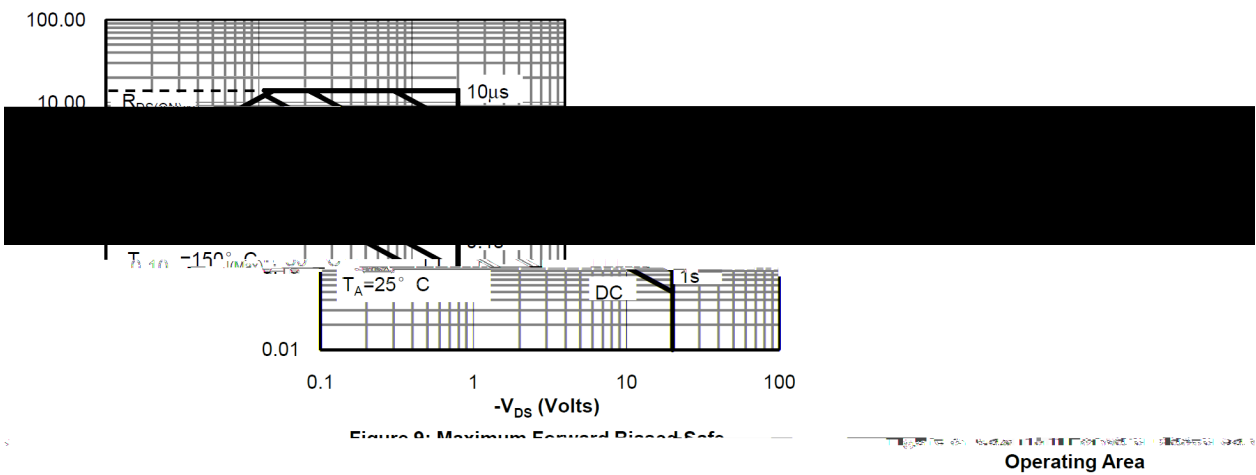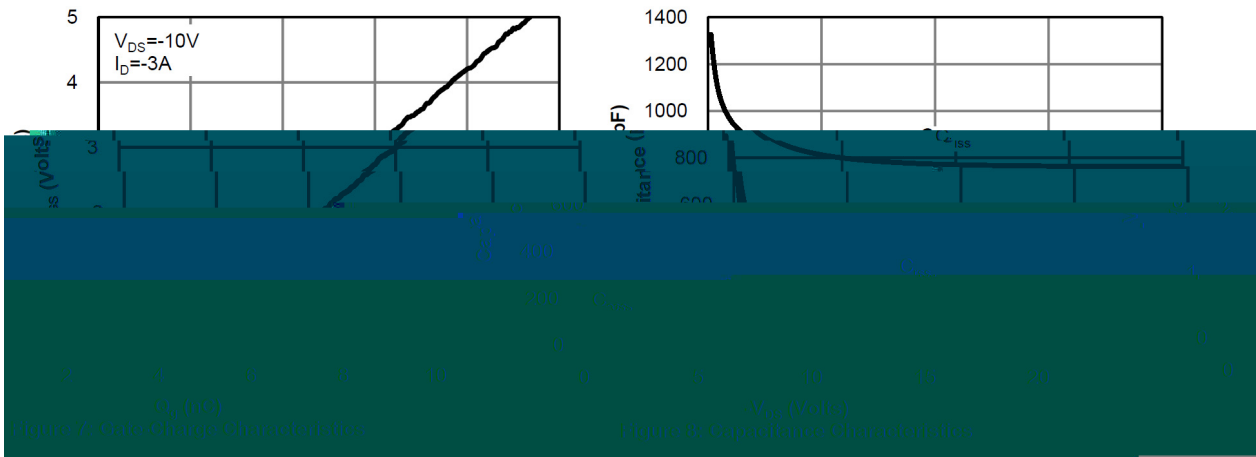


SOT-23

单位: mm

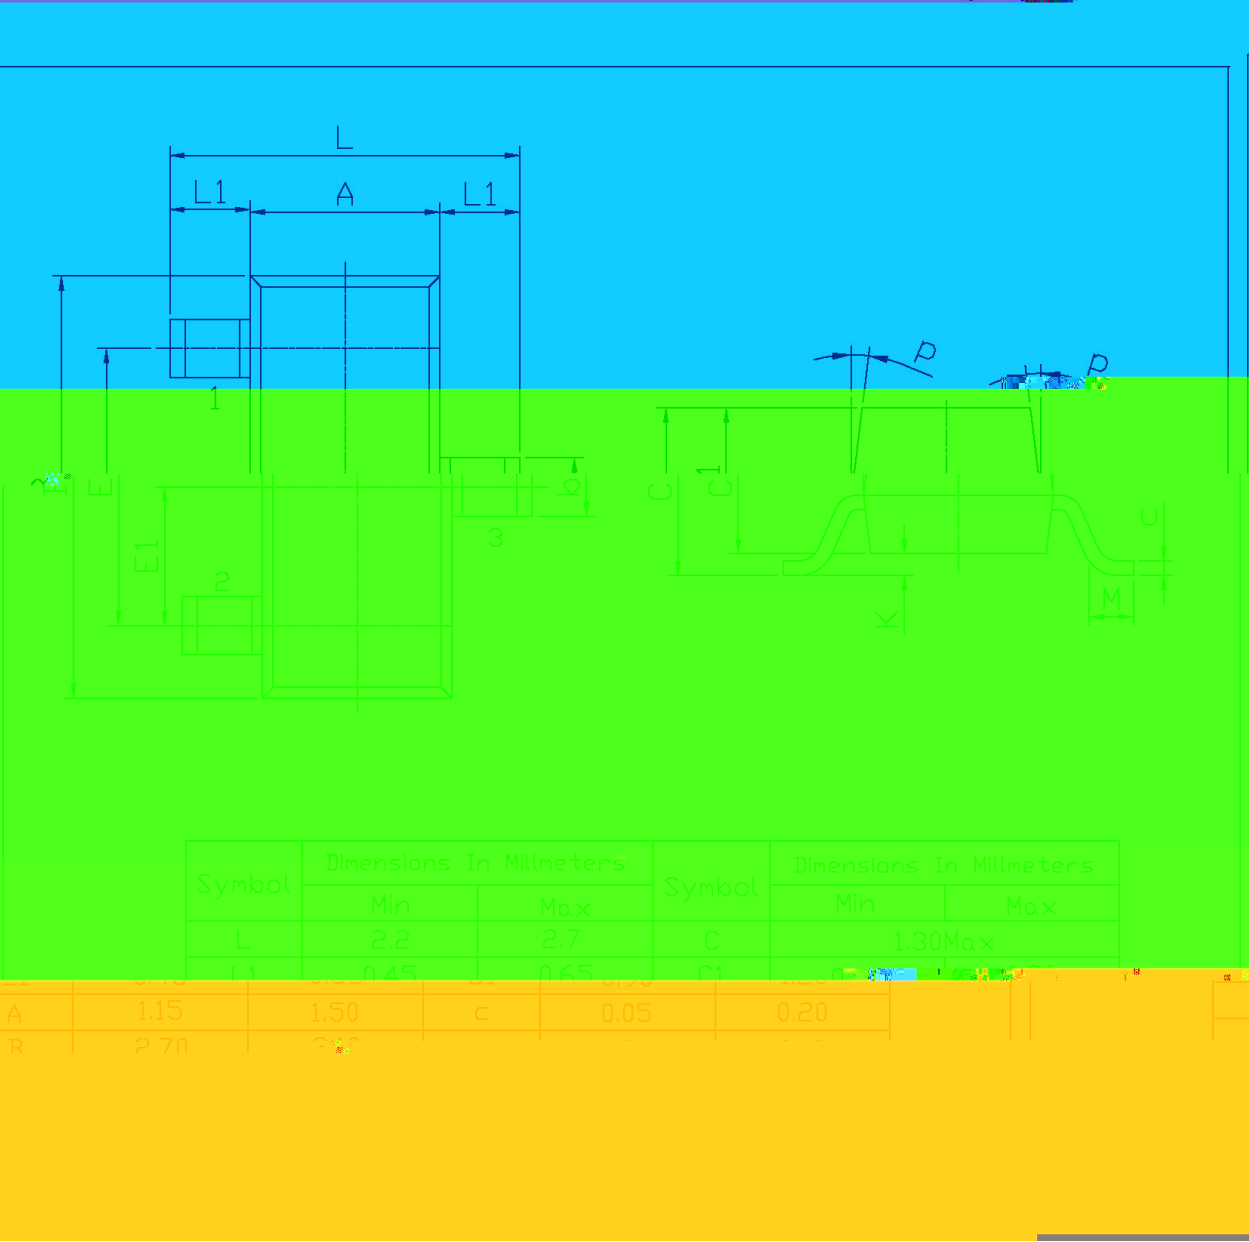

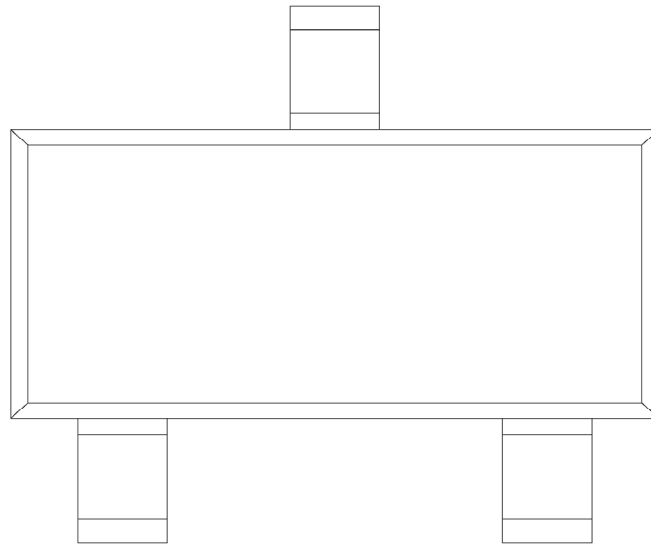

Temperature Profile for IR Reflow Soldering(Pb-Free)

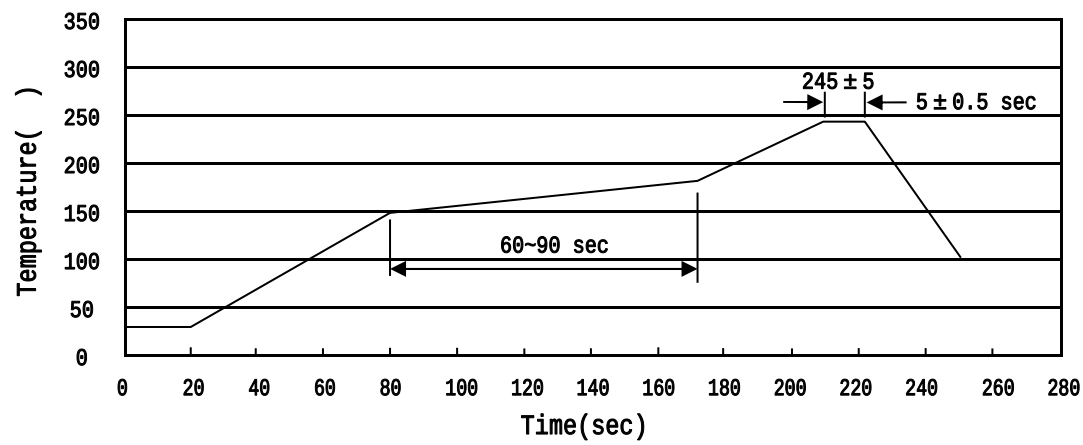

±

±

±

±

±

±

±

±

						"		