

一、Description


二、Features

三、Applications

四、Equivalent Circuit




五、Pinning



六、Marking


--	--




DATA SHEET

--	--	--


电 压 特 性 / Electrical Characteristic Curve

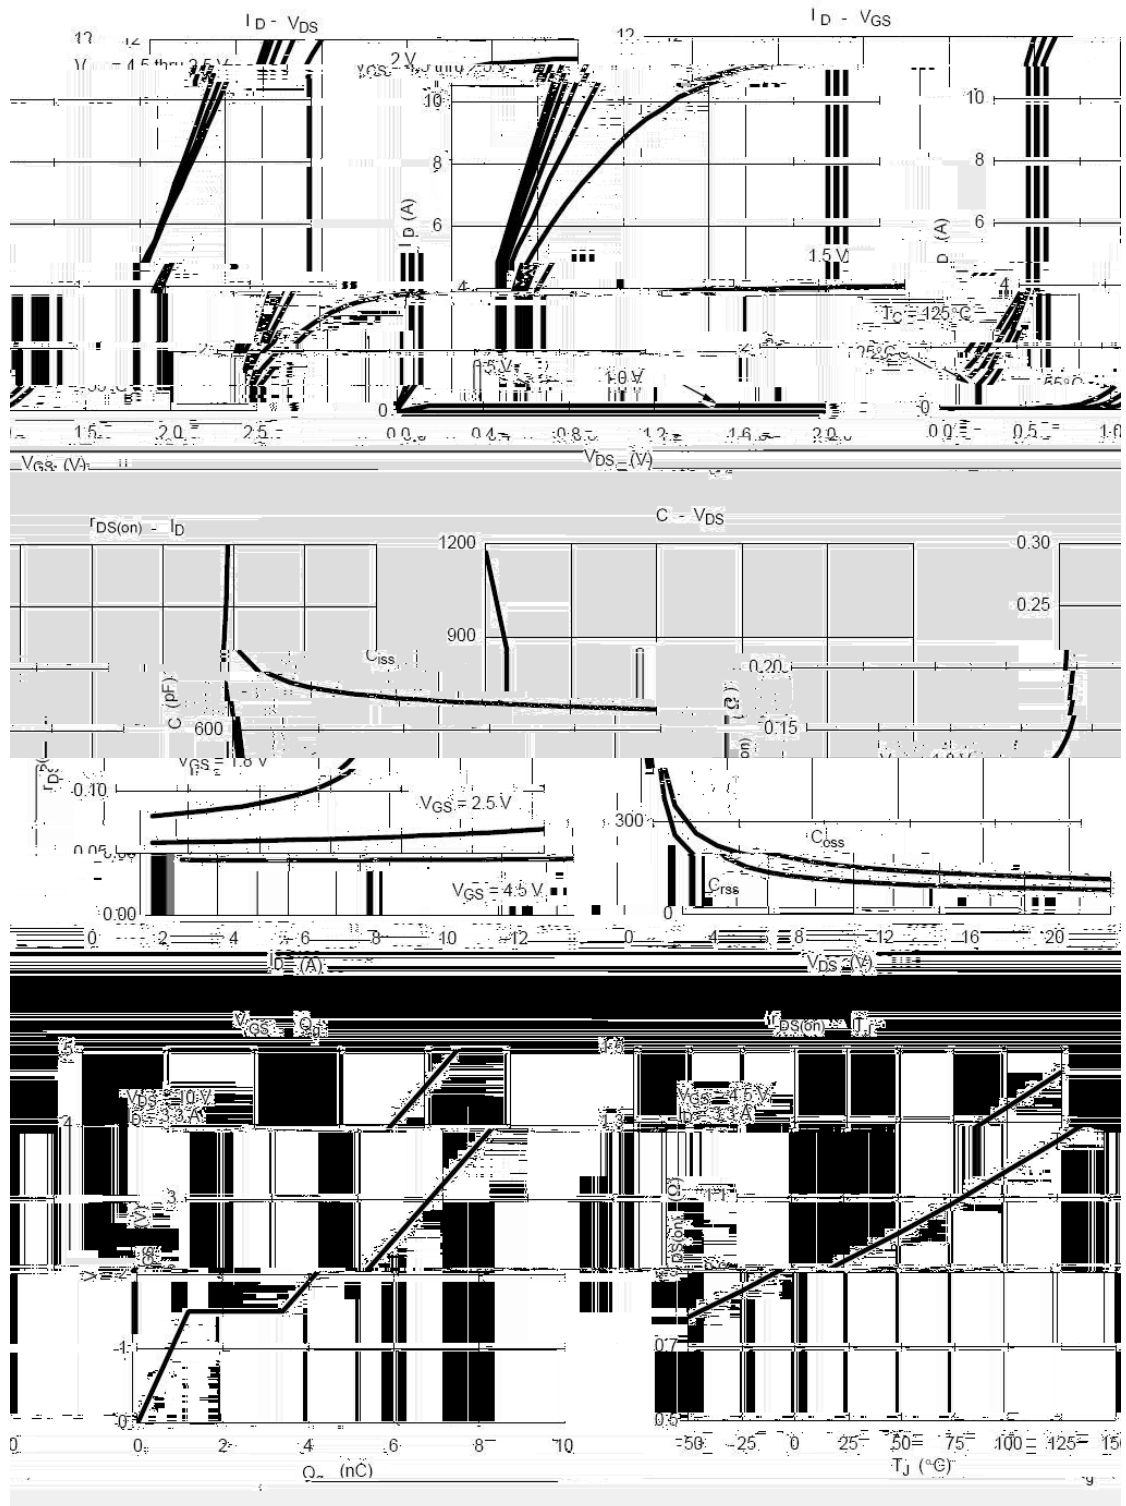

Electrical Characteristic Curve

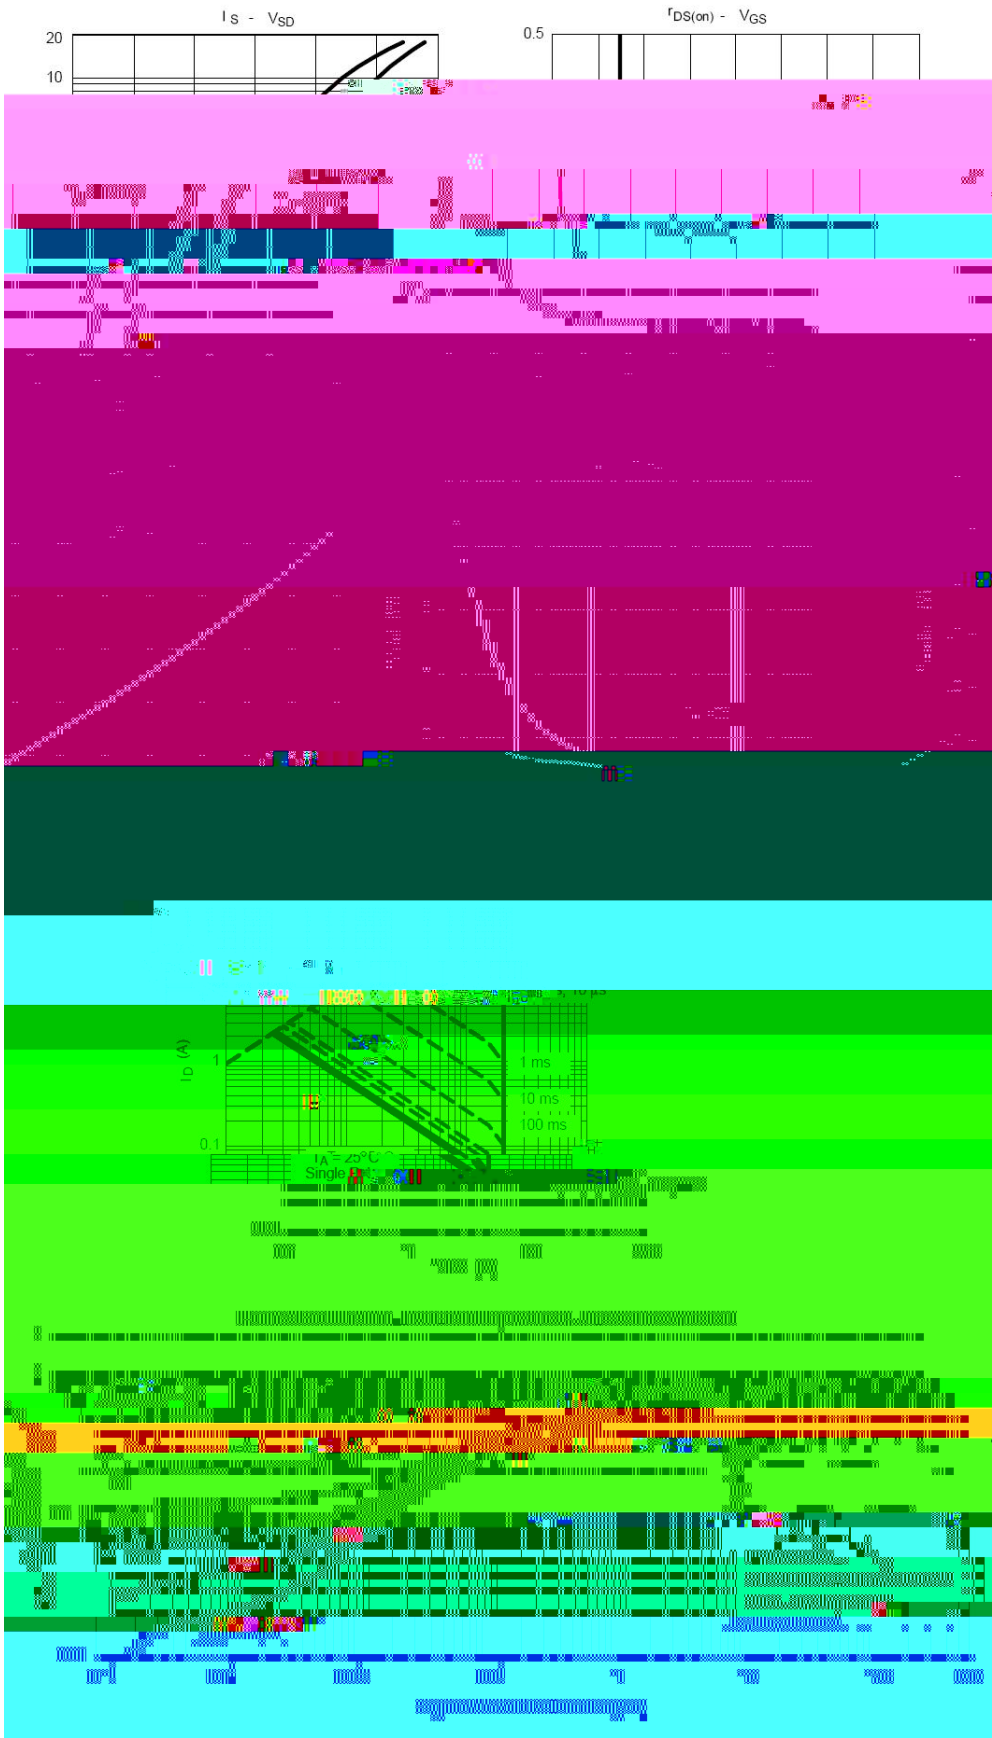


Package Dimensions

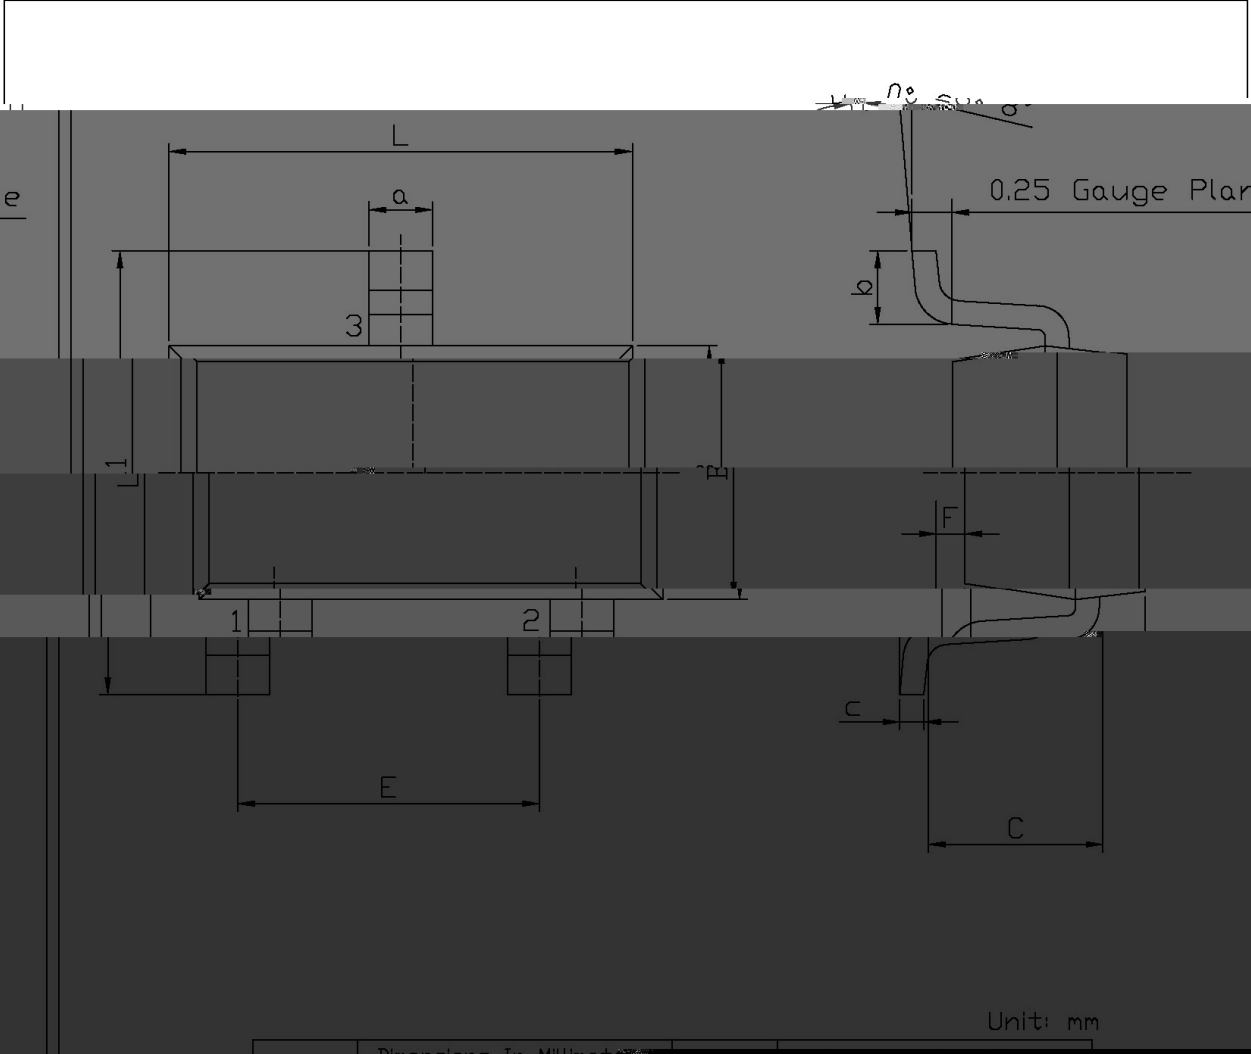


Dimensions in Millimeters					
L	2.8	3.0	a	0.85	0.30
B	1.50	1.70	c	0.10	0.20

4. 符号 / Marking Instructions

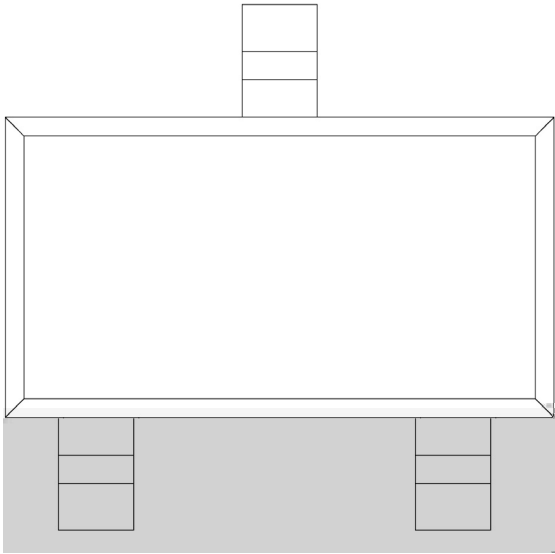

Whp shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0l uhh,

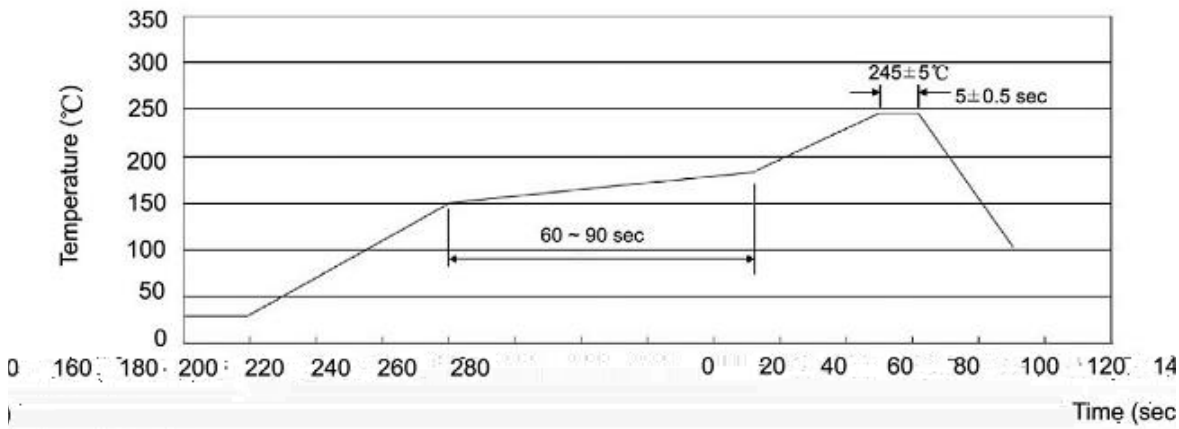

Resistance to Soldering Heat Test Conditions

Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT23-3	3,000	10	30,000	4	120,000	7 ×8	210×205×205	445×230×435

Notices