


“Y / Descriptions

• Ę / Features


v / Applications

DC-DC

л ^ ǻ ≡ / Equivalent Circuit



ǻ / ǻ̃ / Pinning



ǻ z z ȧ. H Ć / h_{FE} Classifications & Marking

Electrical Characteristics(Ta=25 ℃)




		μ				
						μ
		μ				
						Ω
		Ω				

1. ≤300μs ≤2%





2.

≤ ≤


电 压 电 流 特 性 曲 线 / Electrical Characteristic Curve

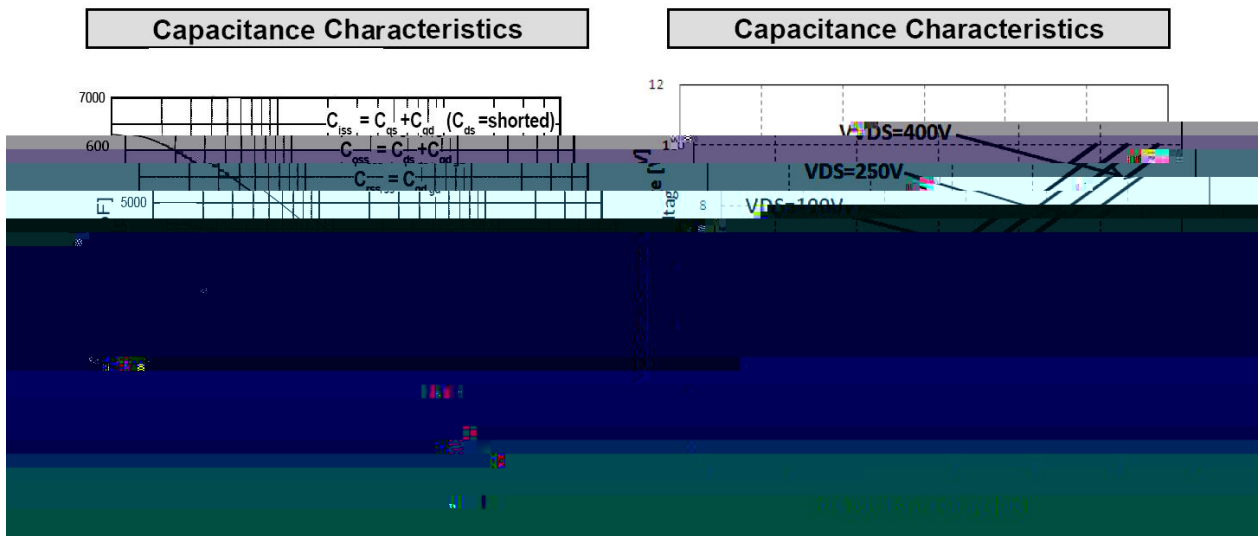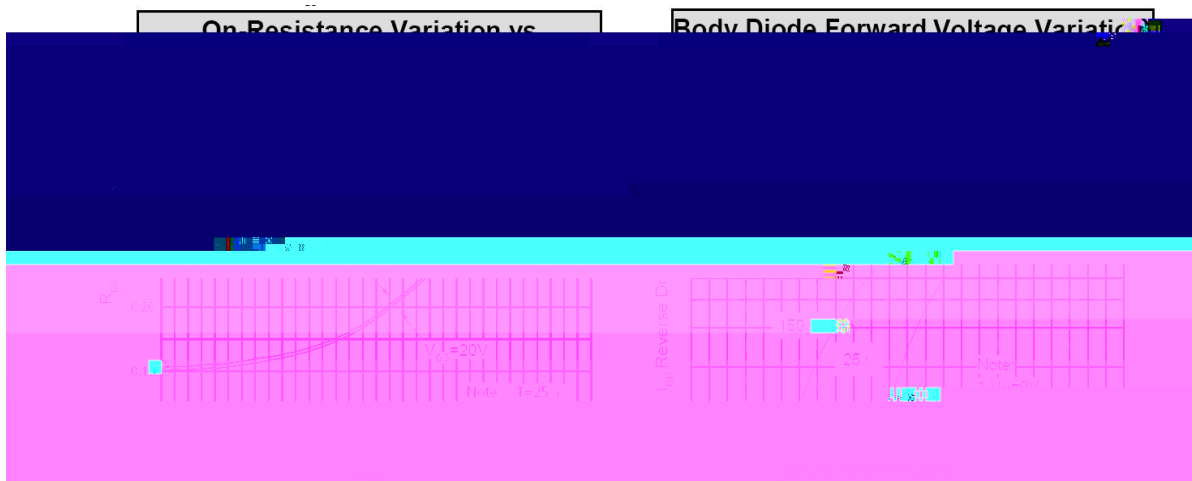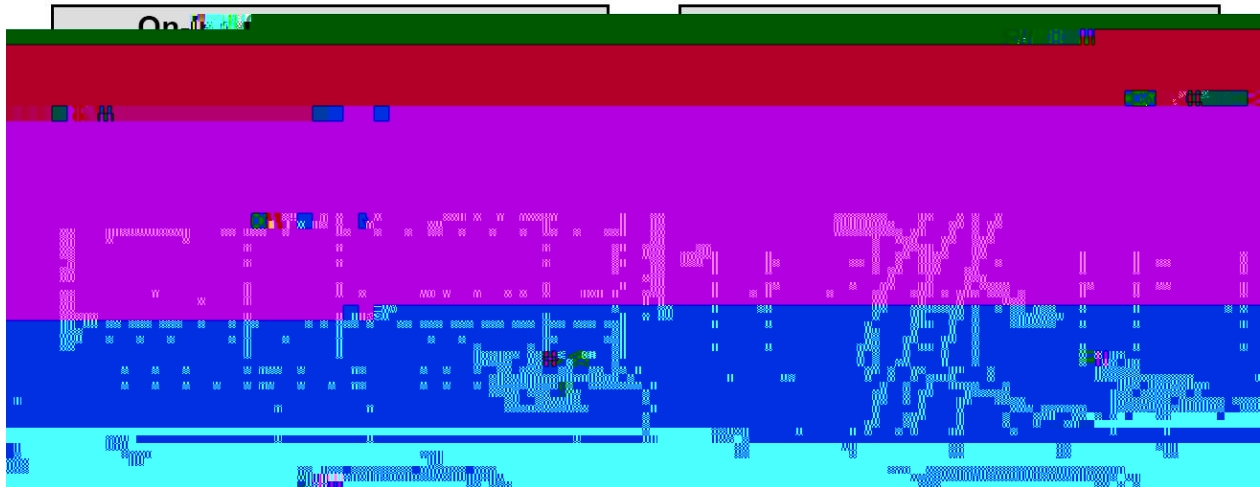


Electrical Characteristics(Ta=25℃)

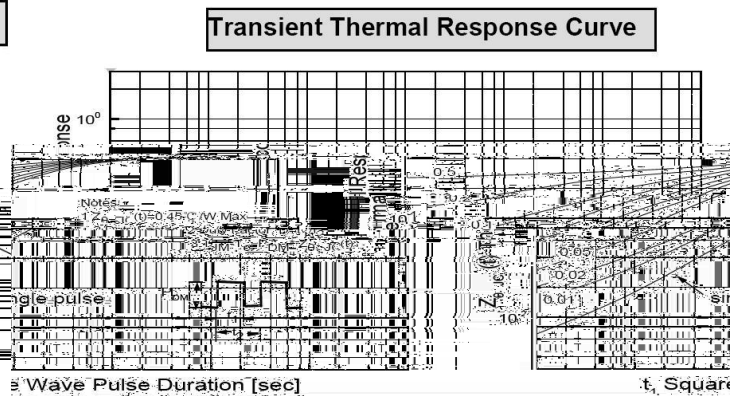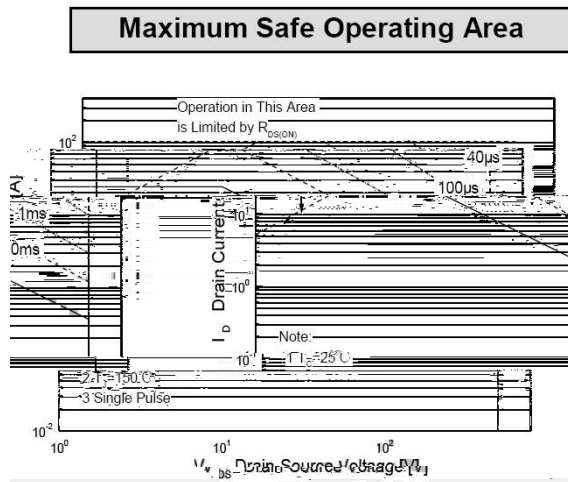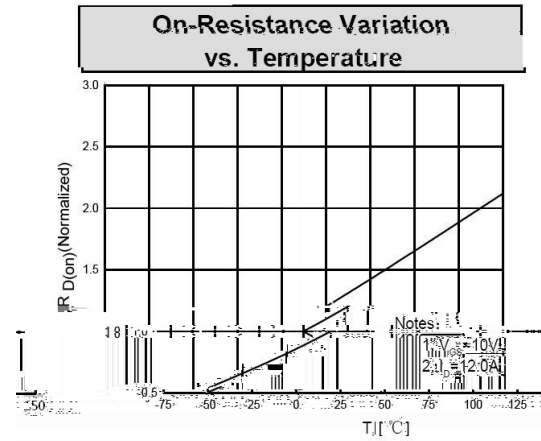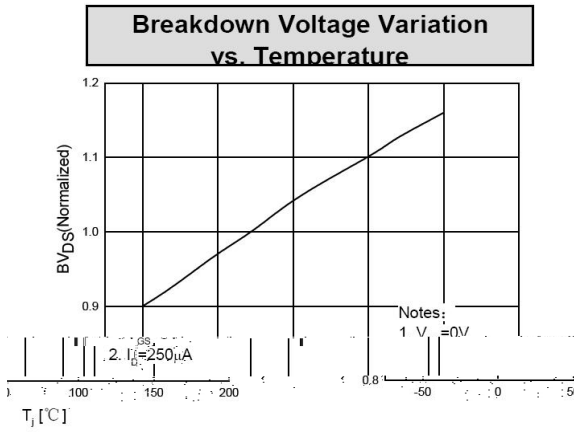

封装尺寸 / Package Dimensions

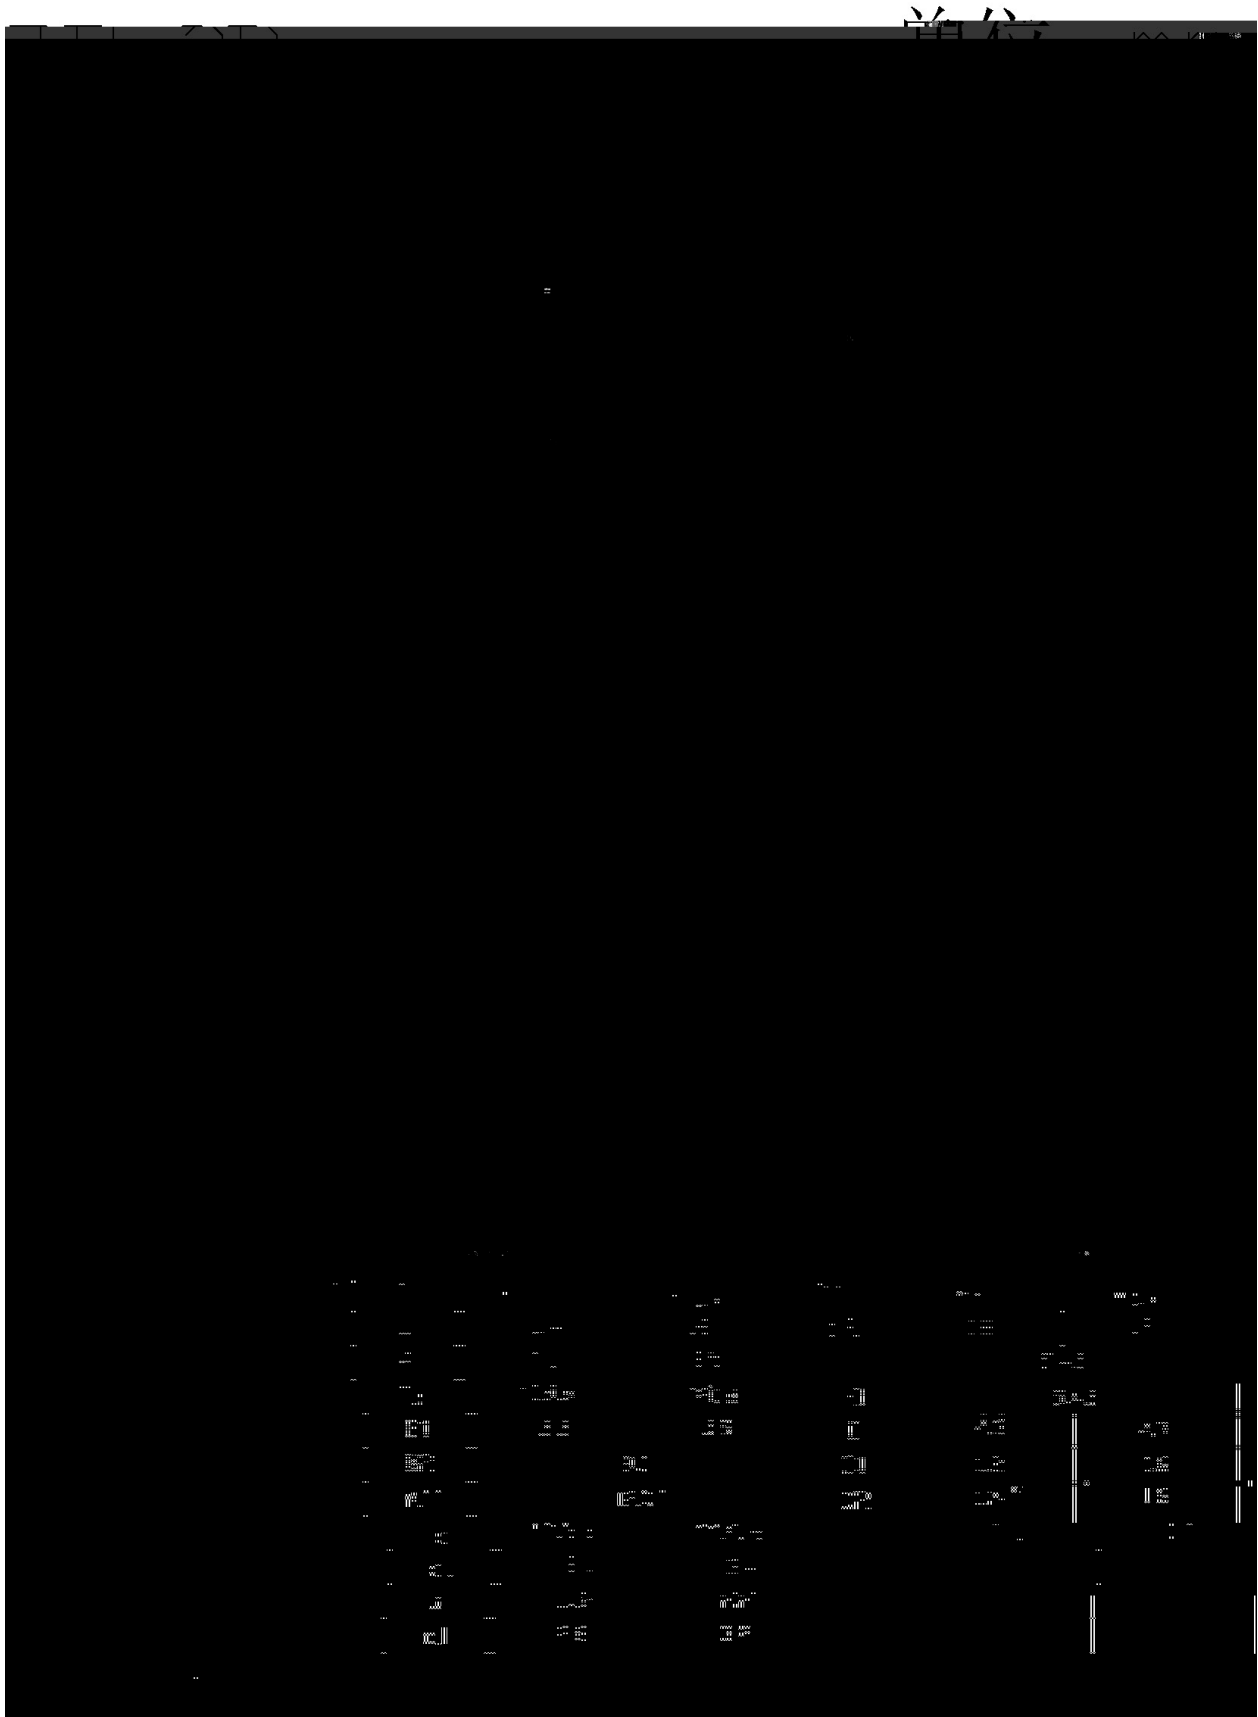


4. 符号 / Marking Instructions

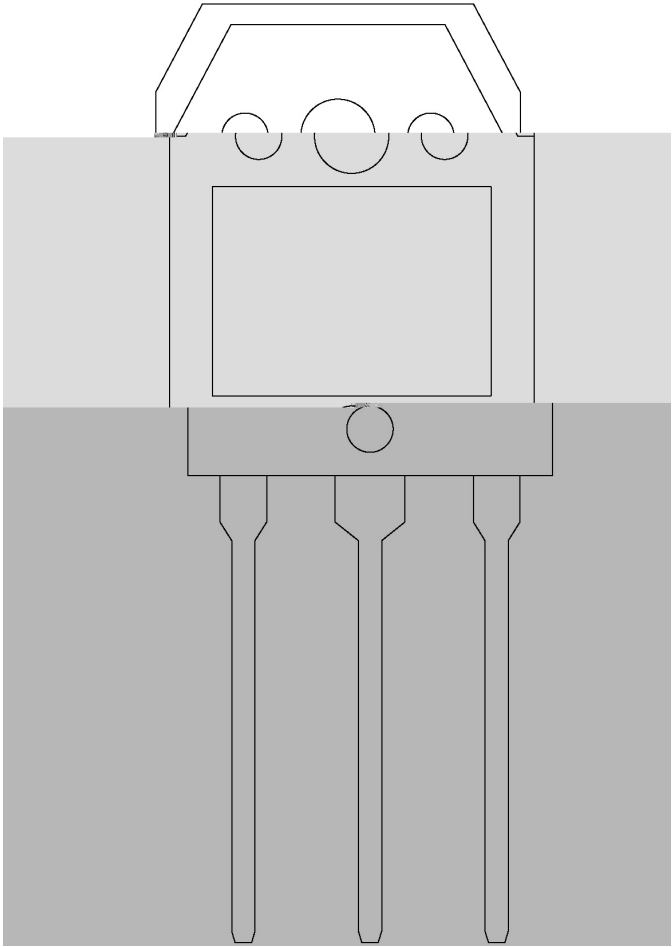

:

↓ § 温度曲线 / Temperature Profile for Dip Soldering(Pb-Free)

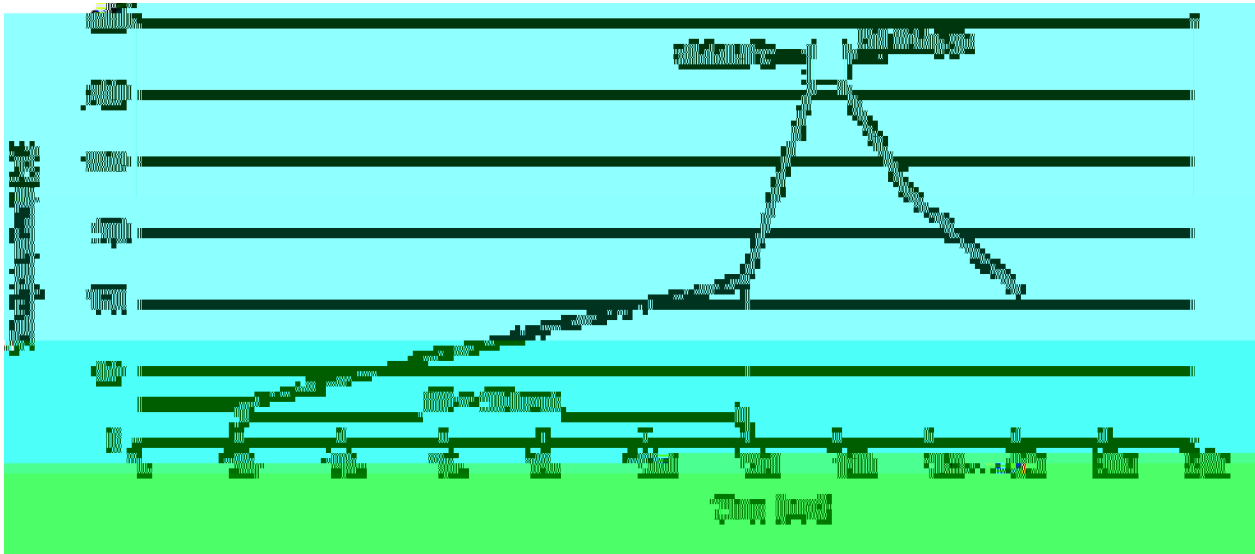

± ± ± ±

↓ § 焊锡热阻 / Resistance to Soldering Heat Test Conditions

± ±

↓ § 包装规格 / Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 套管	套管 盒	只 盒	盒 箱	只 箱	套管	盒	箱

↓ § 注意事项 / Notices