

/ Descriptions

N TO-252 N-CHANNEL MOSFET in a TO-252 Plastic Package.



/ Features

$R_{DS(on)}$ C_{rss}
Low $R_{DS(on)}$, low gate charge, low C_{rss} , fast switching.

/ Applications

DC/DC

Suited for low voltage applications such as automotive, DC/DC Converters, and high efficiency switching for power management in portable and battery operated products.

/ Equivalent Circuit**/ Pinning**

PIN1 G PIN 2 D PIN 3 S PIN 4 D

/ h_{FE} Classifications & Marking

See Marking Instructions.

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DSS}	100	V
Drain Current	$I_D(T_C=25^\circ\text{C})$	30	A
Drain Current	$I_D(T_C=100^\circ\text{C})$	20	A
Drain Current - Pulsed ^C	I_{DM}	70	A
Gate-Source Voltage	V_{GS}	± 20	V
Avalanche Current ^C	I_{AS}	18.3	A
Avalanche energy $L=0.5\text{mH}$ ^C	E_{AS}	133	mJ
Power Dissipation ^B	$P_D(T_C=25^\circ\text{C})$	100	W
	$P_D(T_C=100^\circ\text{C})$	50	W
Power Dissipation ^A	$P_{DSM}(T_A=25^\circ\text{C})$	2.5	W
	$P_{DSM}(T_A=70^\circ\text{C})$	1.6	W
Junction and Storage Temperature Range	$T_j \quad T_{stg}$	-55 150	

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V \quad I_D=-250\mu A$	100			V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=100V \quad V_{GS}=0V$			1.0	μA
		$V_{DS}=100V \quad V_{GS}=0V$ $T_J=55^\circ C$			5.0	μA
Gate-Body Leakage Current Forward	I_{GSS}	$V_{GS}=\pm 20V \quad V_{DS}=0V$			100	nA
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS} \quad I_D=250\mu A$	1	1.4	2.5	V
Static Drain-Source On-Resistance	$R_{DS(on)1}$	$V_{GS}=10V \quad I_D=30A$		48	55	m Ω

th)7

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Input Capacitance	C_{iss}	$V_{DS}=25V$ $V_{GS}=0V$ $f=1.0MHz$		888		pF
Output Capacitance	C_{oss}			9.4		
Reverse Transfer Capacitance	C_{rss}			72		
Gate resistance	R_g	$V_{GS}=0V$ $V_{DS}=0V$ $f=1MHz$		1.61		Ω
Total Gate Charge	$Q_g(10V)$	$V_{GS}=10V$ $V_{DS}=50V$ $I_D=10A$	26	34	44	nC
Total Gate Charge	$Q_g(4.5V)$		14	18	22	
Gate Source Charge	Q_{gs}		4	6	8	
Gate Drain Charge	Q_{gd}		5	9	13	
Turn-On Delay Time	$t_{d(on)}$	$V_{GS}=10V$ $V_{DS}=50V$ $R_L=5\Omega$ $R_{GEN}=3\Omega$		7		ns
Turn-On Rise Time	t_r			7		
Turn-Off Delay Time	$t_{d(off)}$			29		
Turn-Off Fall Time	t_f			7		
Body Diode Reverse Recovery Time	t_{rr}	$I_F=10A$ $dI/dt=500A/ms$	22	32	42	ns
Body Diode Reverse Recovery Charge	Q_{rr}	$I_F=10A$ $dI/dt=500A/ms$	140	200	260	nC
Maximum Junction-to-Ambient ^A	$R_{\theta JA}$	$t \leq 10s$		14.2	20	/W
Maximum Junction-to-Ambient ^{AD}		steady-State		39	50	/W
Maximum Junction-to-Case	$R_{\theta JC}$	steady-State		0.8	1.5	/W

/ Electrical Characteristic Curve

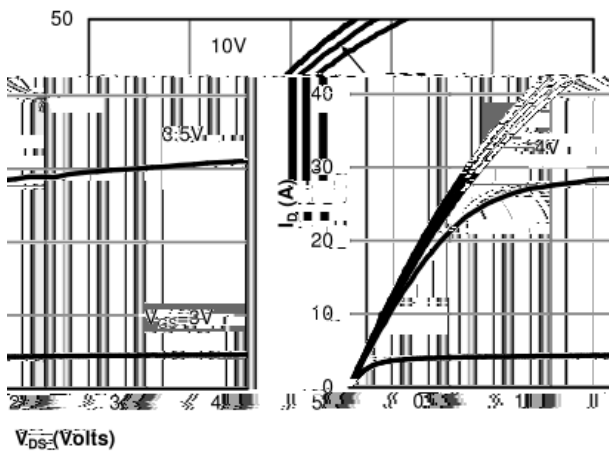


Fig 1: On-Region

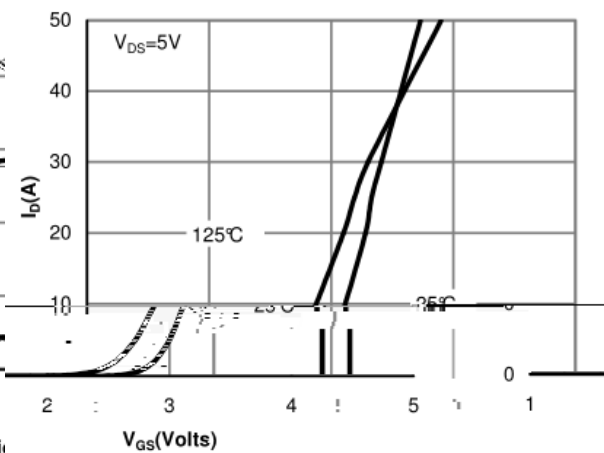


Figure 2: Transfer Characteristics

Fig

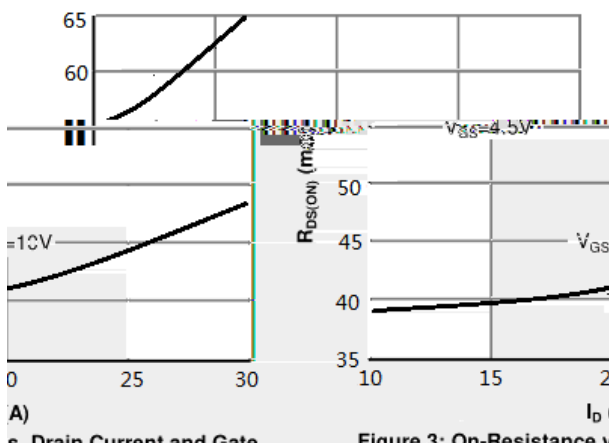


Figure 3: On-Resistance vs.

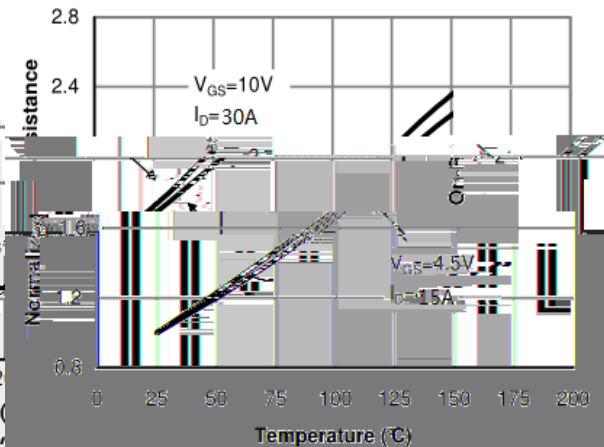


Figure 4: On-Resistance vs. Junction Temperature

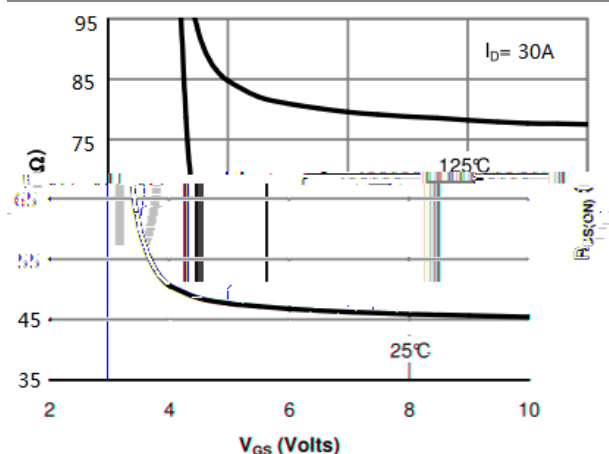


Figure 5: On-Resistance vs. Gate-Source Voltage

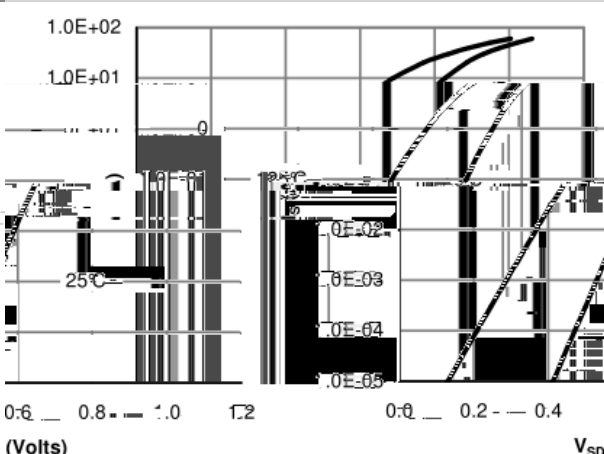


Figure 6: Body Diode

/ Electrical Characteristic Curve

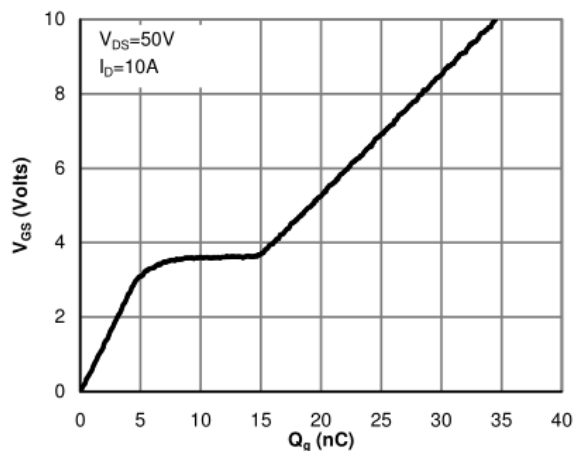


Figure 7: Gate-Charge Characteristics

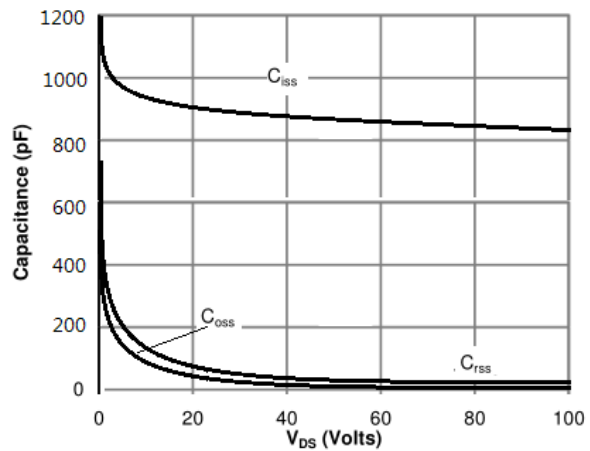


Figure 8: Capacitance Characteristics

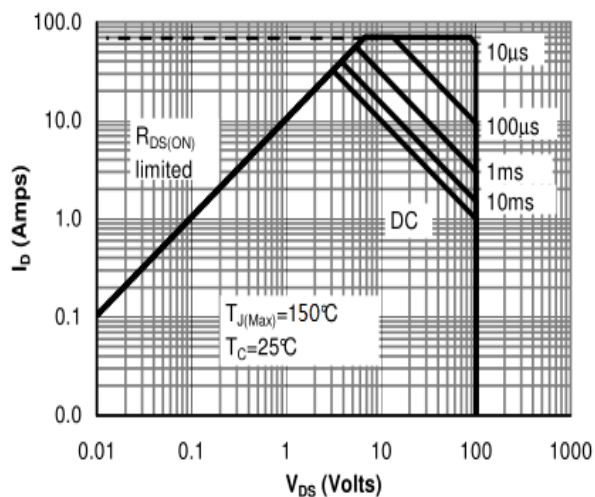


Figure 9: Maximum Forward Biased Safe Operating Area


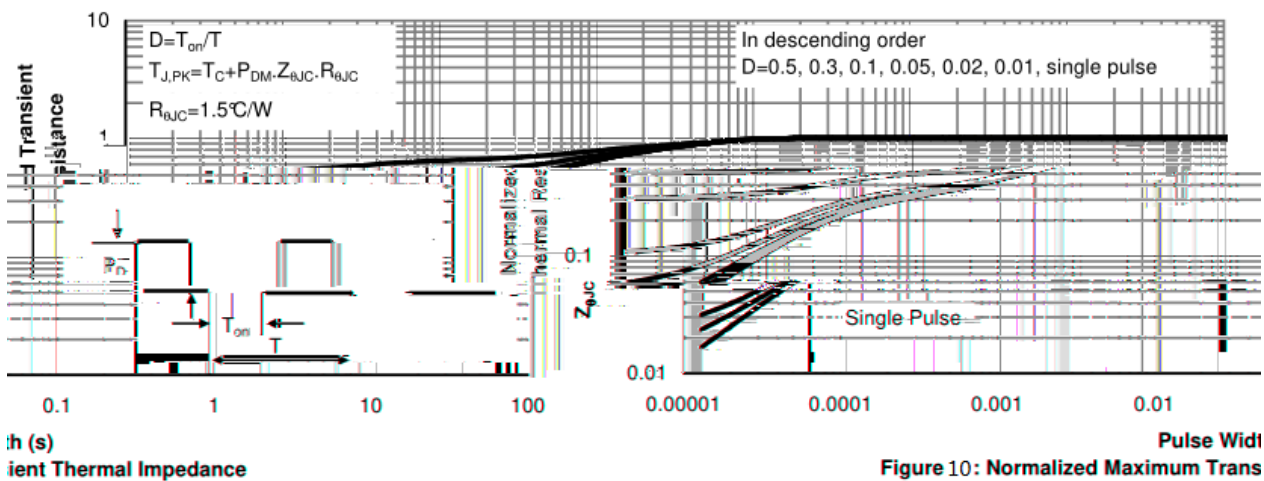



Figure 10: Normalized Maximum Transient Thermal Impedance

& Test circuits & Typical Application


Gate Charge Test Circuit & Waveform

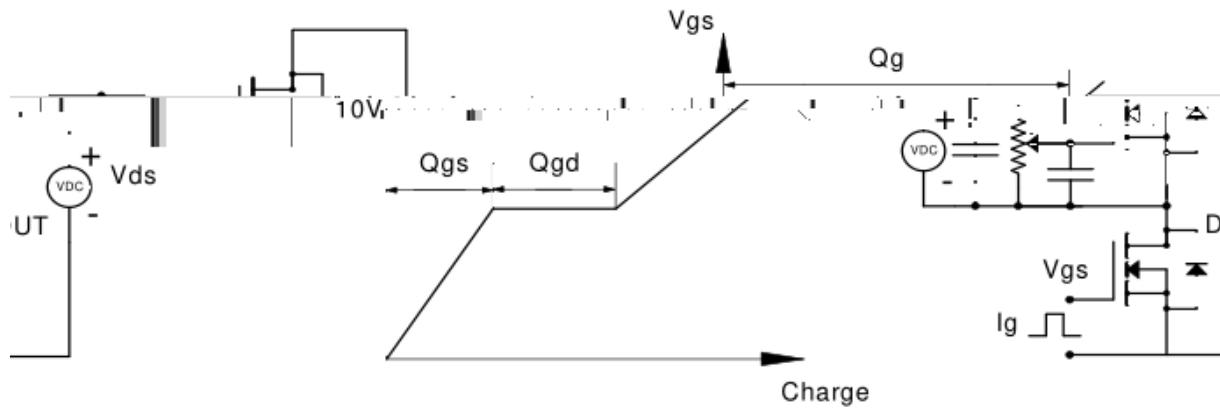


Resistive Switching Test Circuit & Waveforms

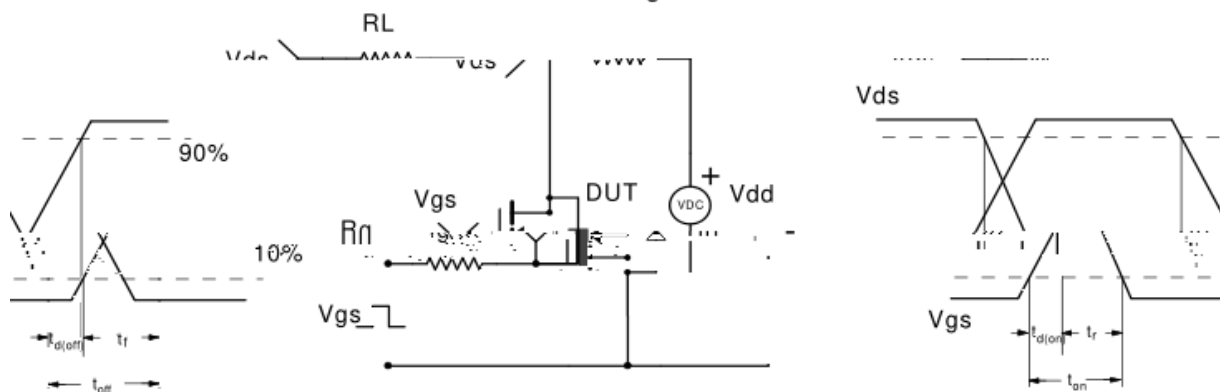


Unclamped Inductive Switching (UIS) Test Circuit & Waveforms

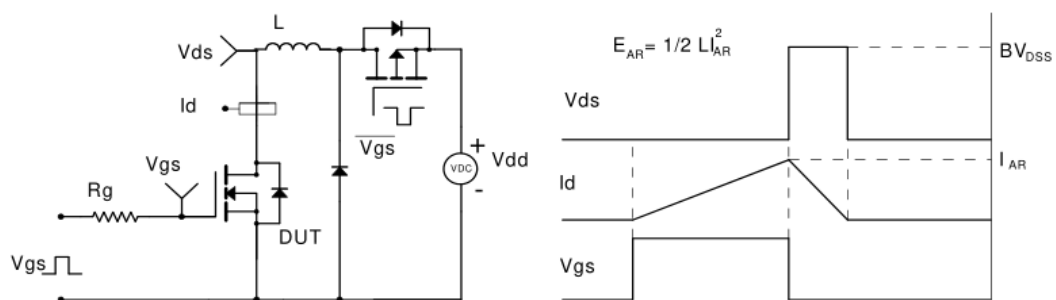


Diode Recovery Test Circuit & Waveforms

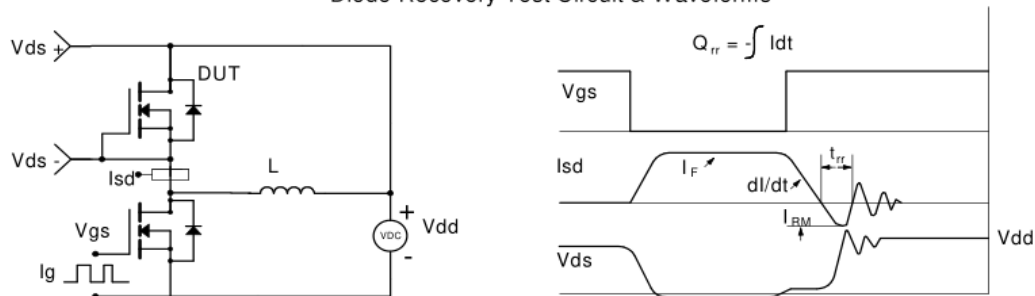


/ Package Dimensions

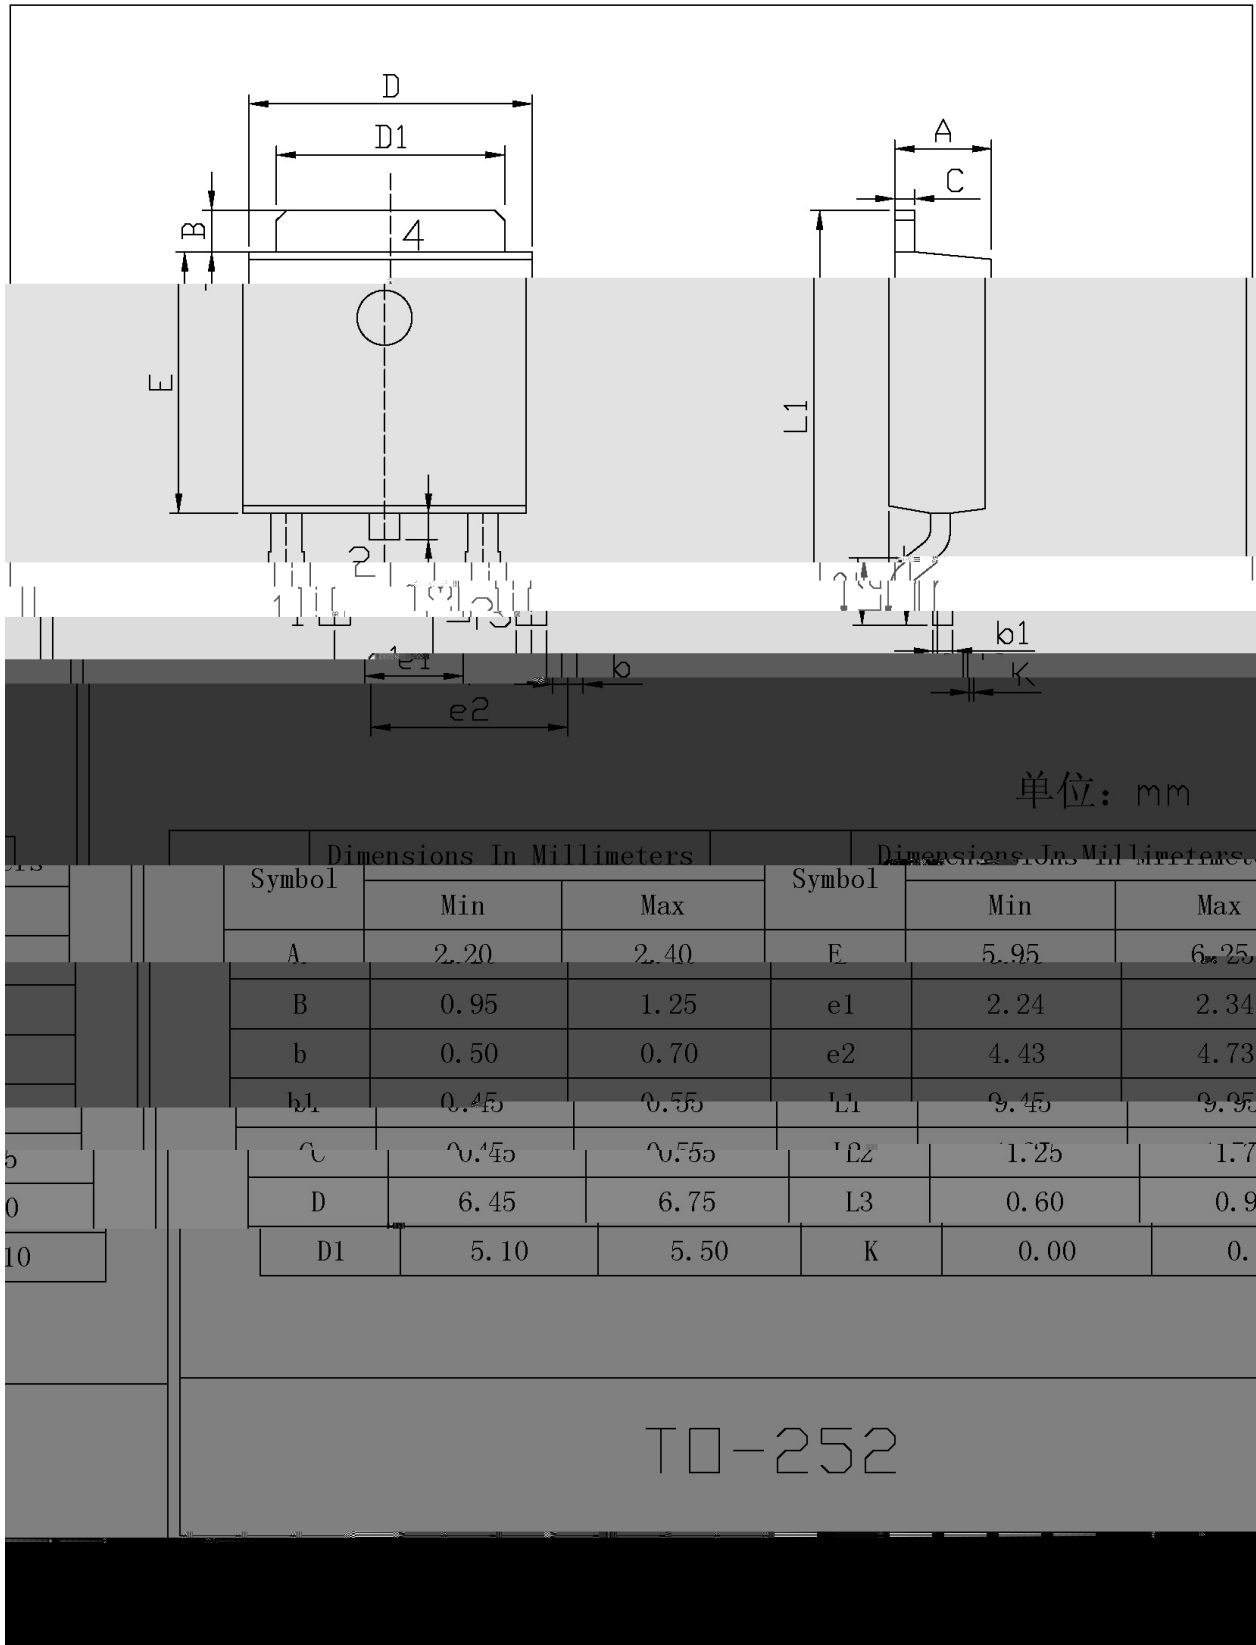

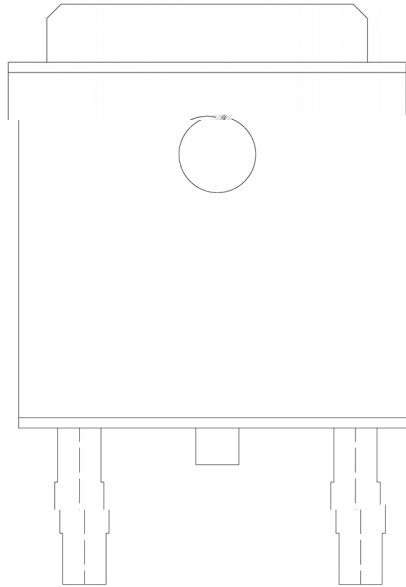

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

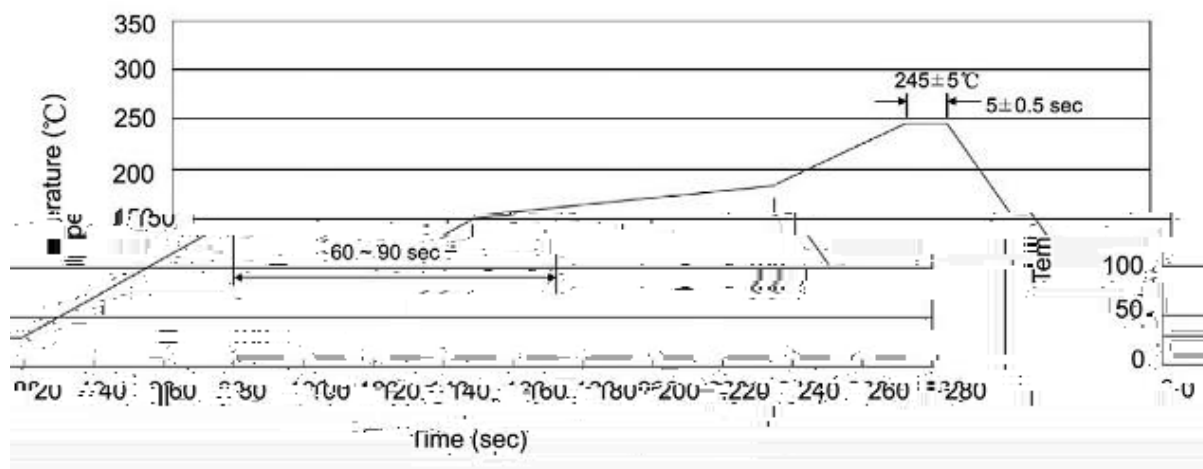

Note:

- | | | | | | |
|---|-------|-----|-----------|--------|---|
| 1 | 150 | 180 | 60 | 90sec; | 1.Preheating:150~180 , Time:60~90sec. |
| 2 | 245±5 | | 5±0.5sec; | | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

/ Resistance to Soldering Heat Test Conditions

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
TO-252	2,500	2	5,000	6	30,000	13 ×16	360×360×50	380×335×366

/ TUBE

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Tube 只/套管	Tubes/Inner Box 套管/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Tube 套管	Inner Box 盒	Outer Box 箱
TO-251/252	75	48	3,600	5	18,000	526×20.5×5.25	555×164×50	575×290×180

/ Notices