

/ Descriptions



SOP-8 N

/ Features $R_{DS(on)}$

RoHS

/ Applications

DC/DC AC/DC /

/ Equivalent Circuit**/ Pinning****/ h_{FE} Classifications & Marking**


/ Electrical Characteristics(Ta=25)

						Ω
		Ω Ω				
		μ				


v

μ


I Electrical Characteristic Curve

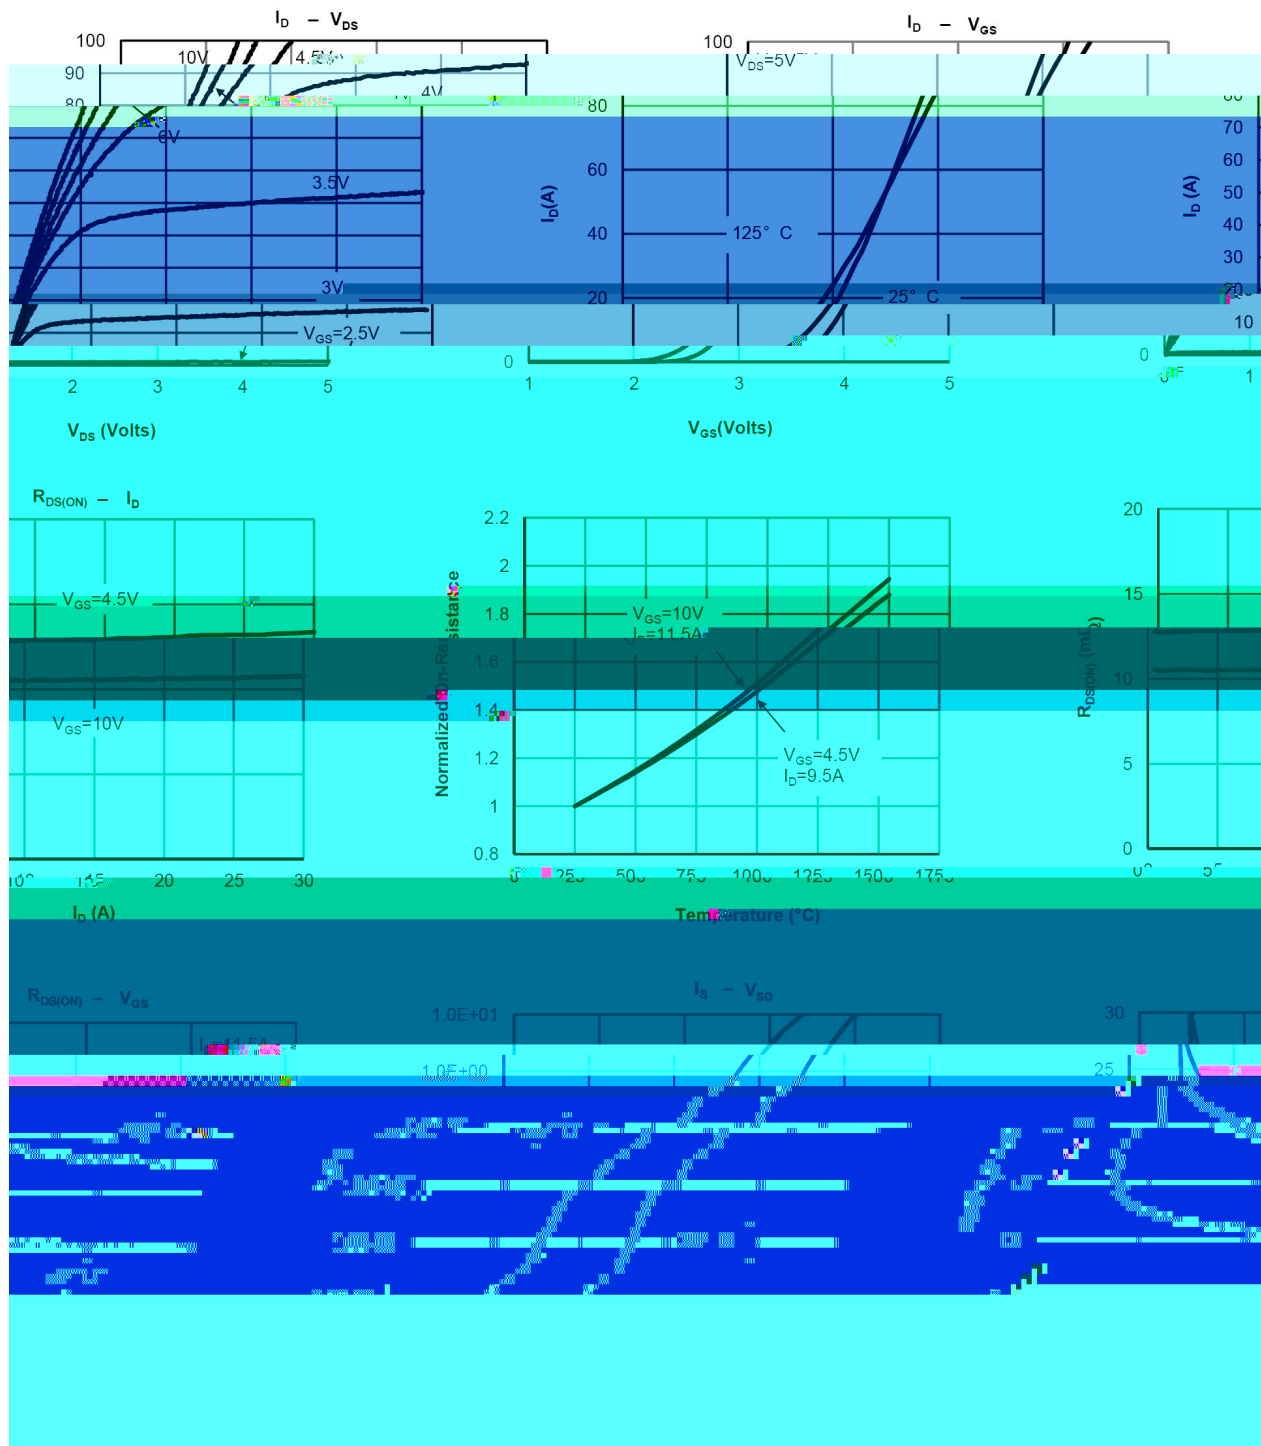


/ Electrical Characteristic Curve

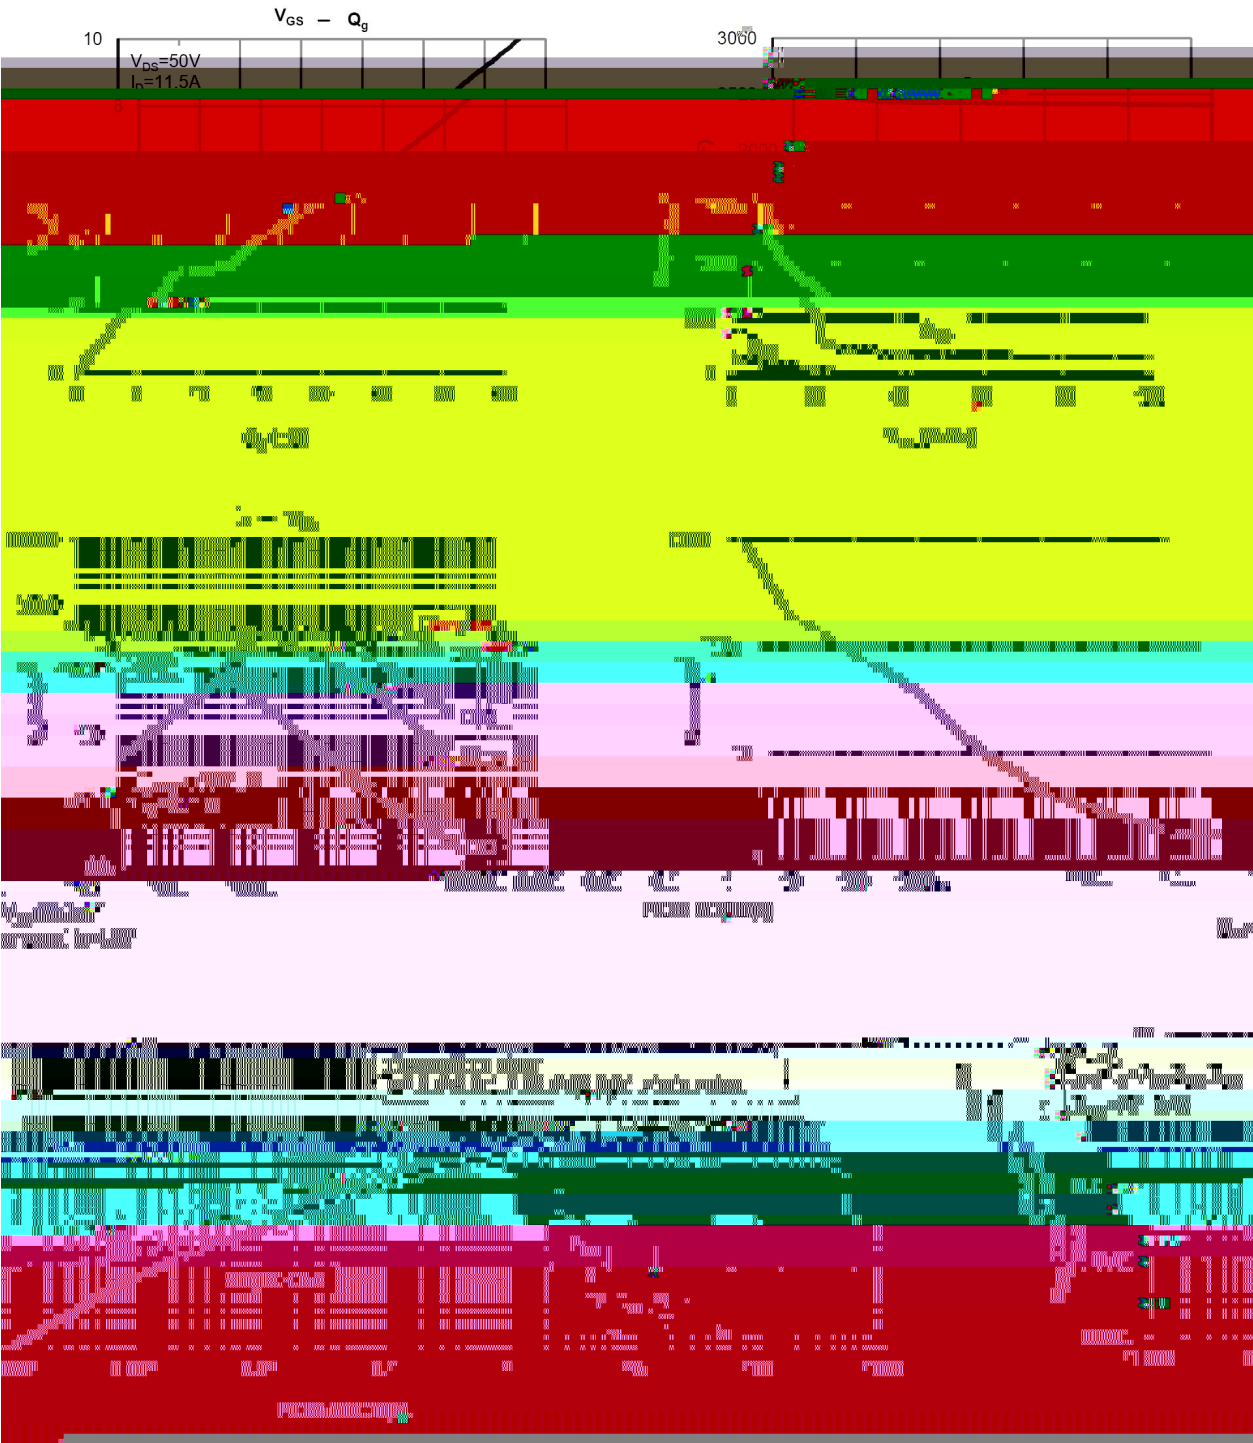


/ Test Circuit & Waveform

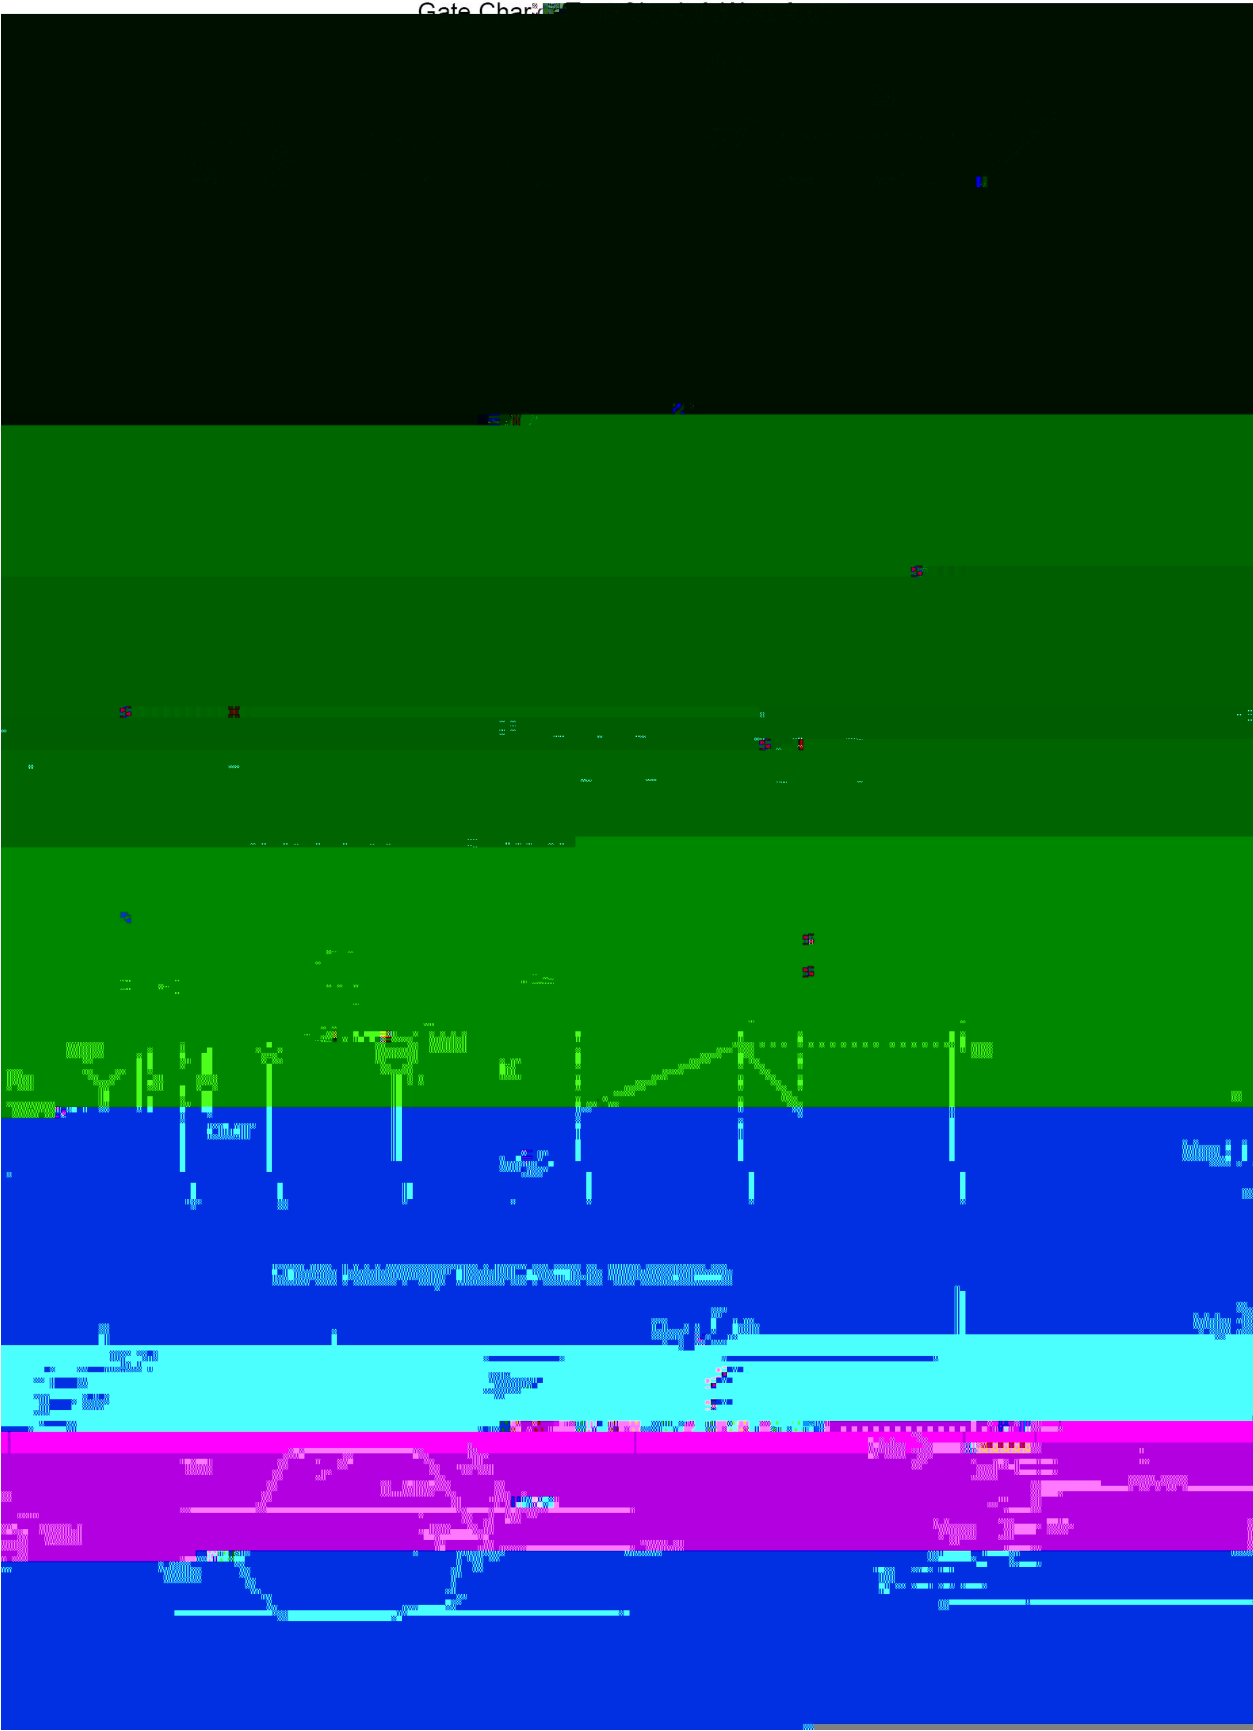

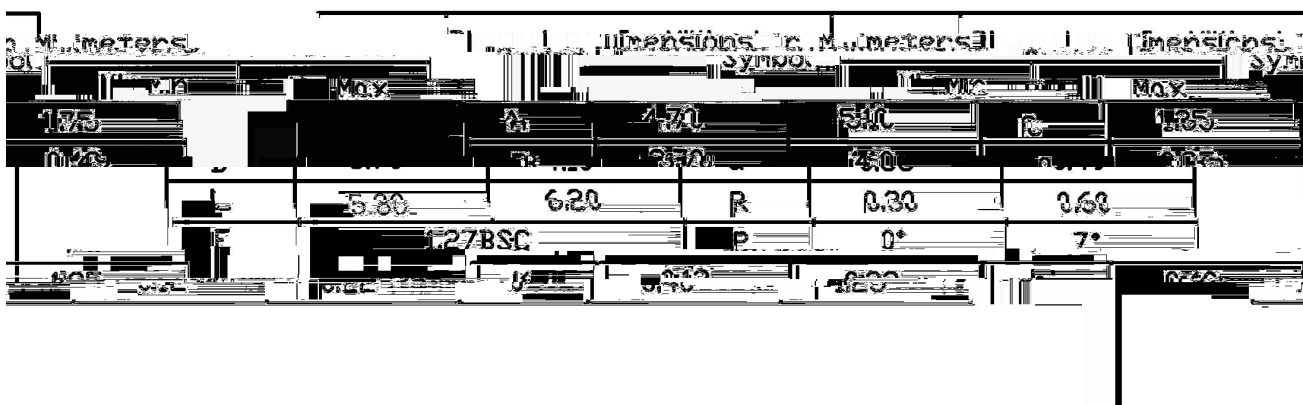


/ Marking Instructions

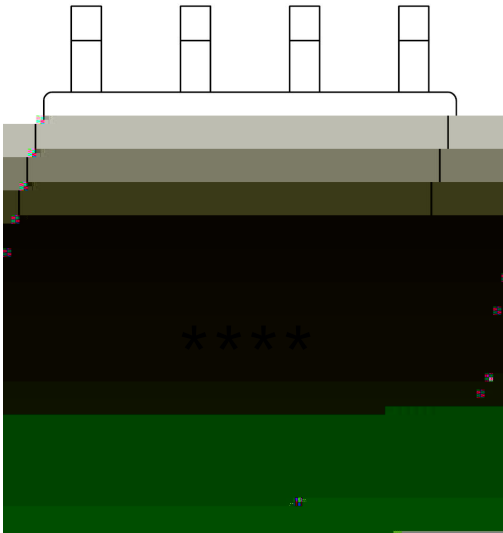

4294

() /

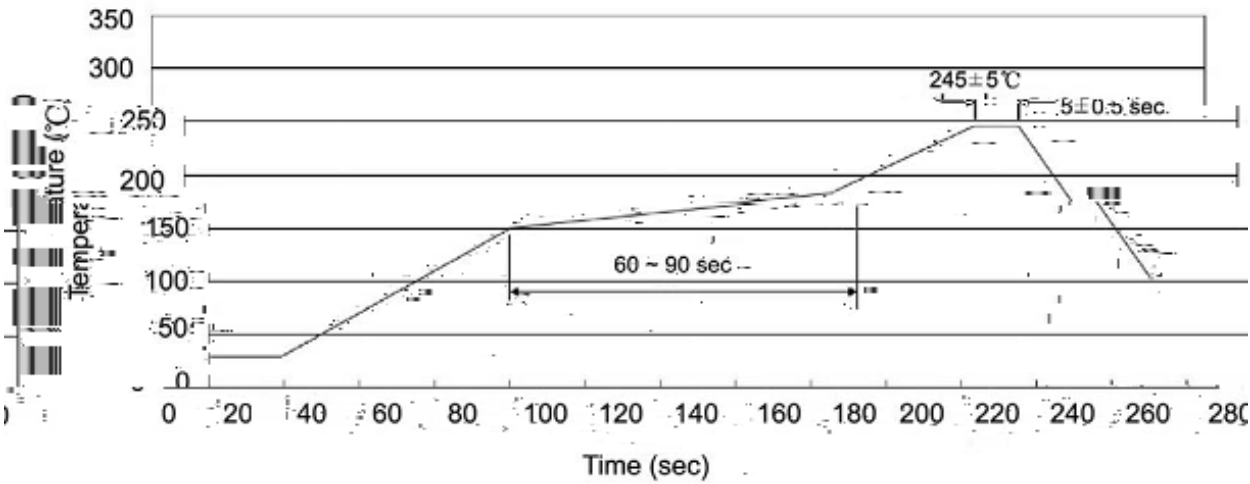

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
SOP/ESOP-8	4,000	2	8,000	6	48,000	13 ×12	360×360×50	380×335×366

/ Notices