

BRCS9926SC

SOP-8 N Power Trench MOS

/ Absolute Maximum Ratings(Ta=25)


			℃
			℃
			℃

/ Electrical Characteristics(Ta=25)


	Δ Δ	℃				℃
		±			±	
	Δ Δ	℃				℃
		℃				

/ Electrical Characteristics(Ta=25)


℃




℃






℃




I Electrical Characteristic Curve

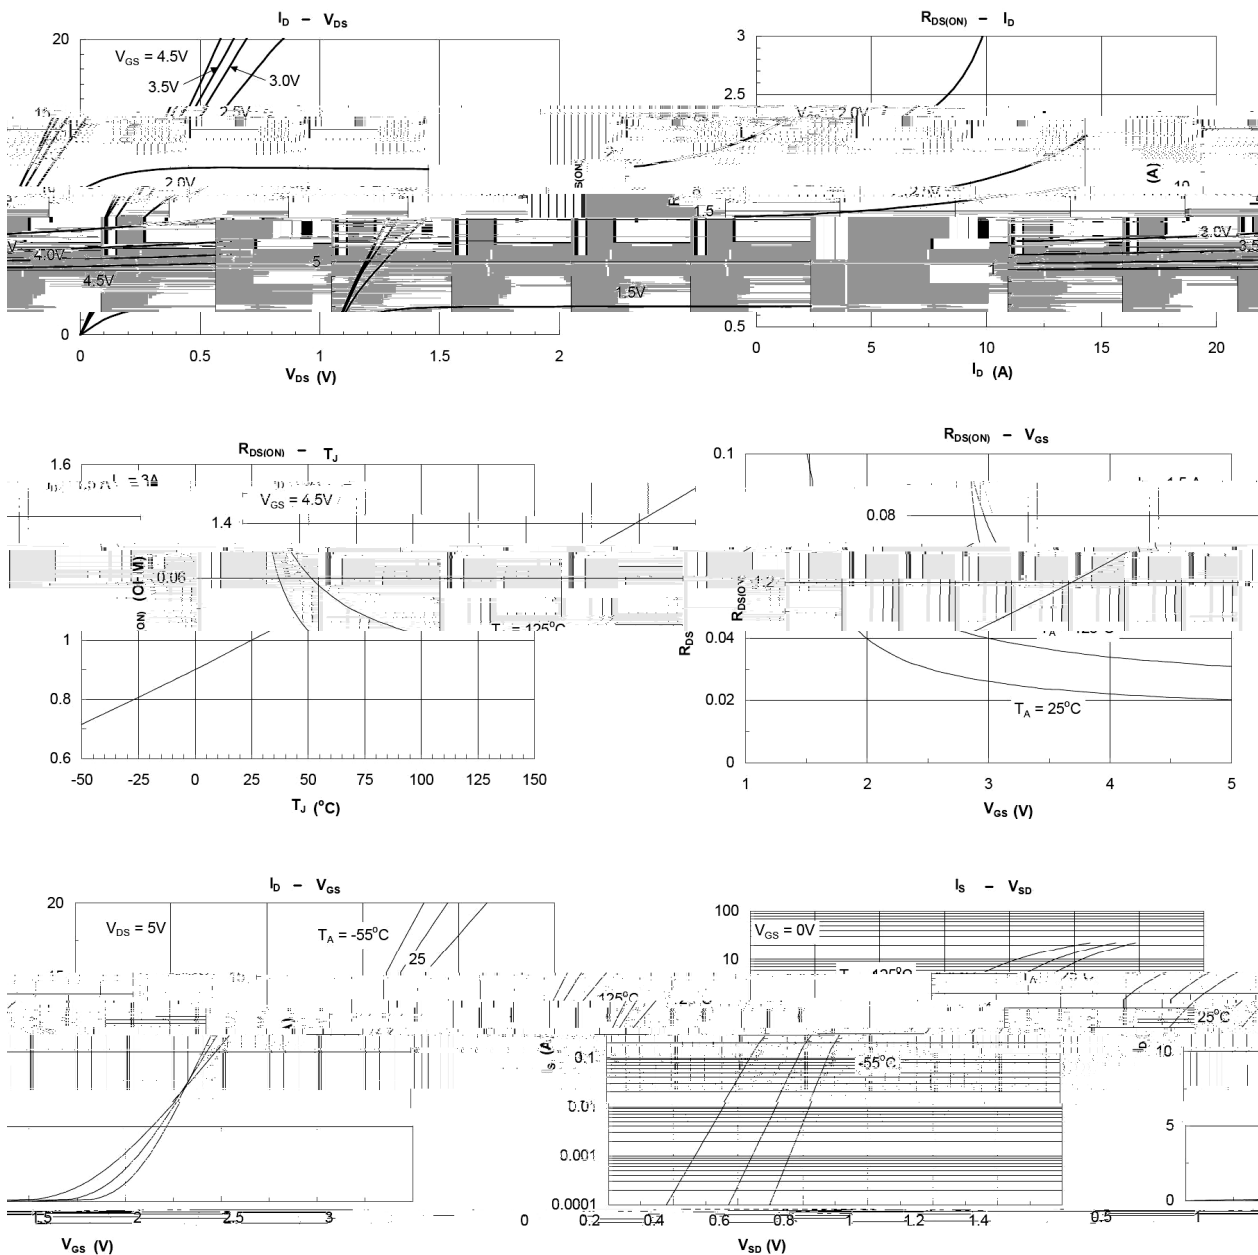

I Electrical Characteristic Curve

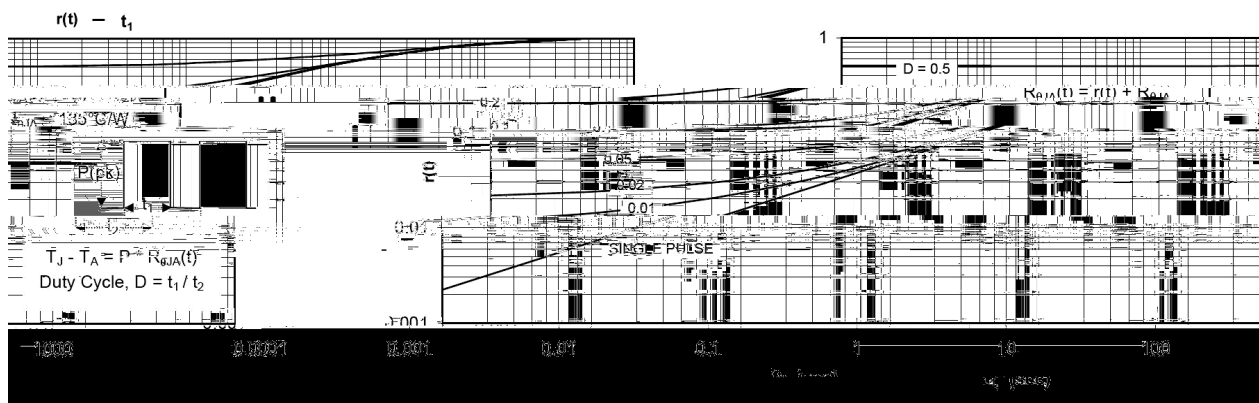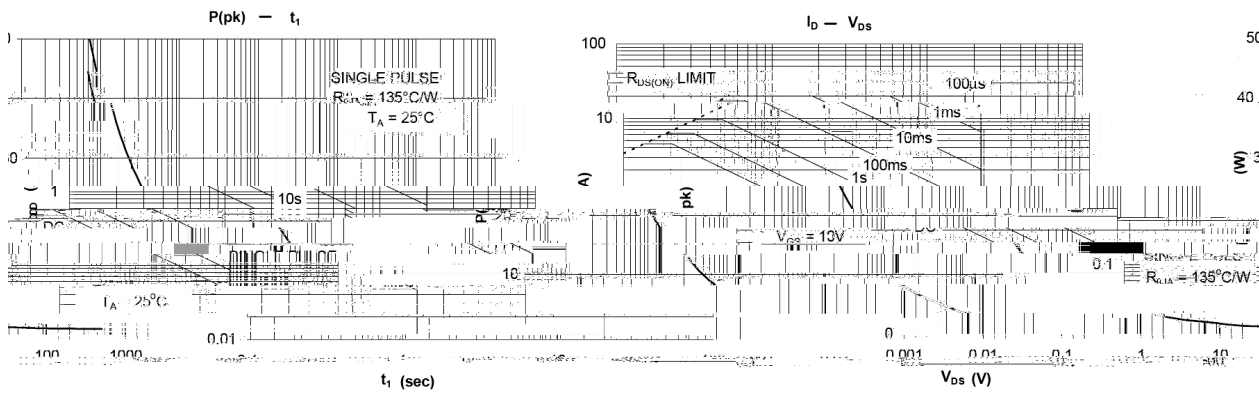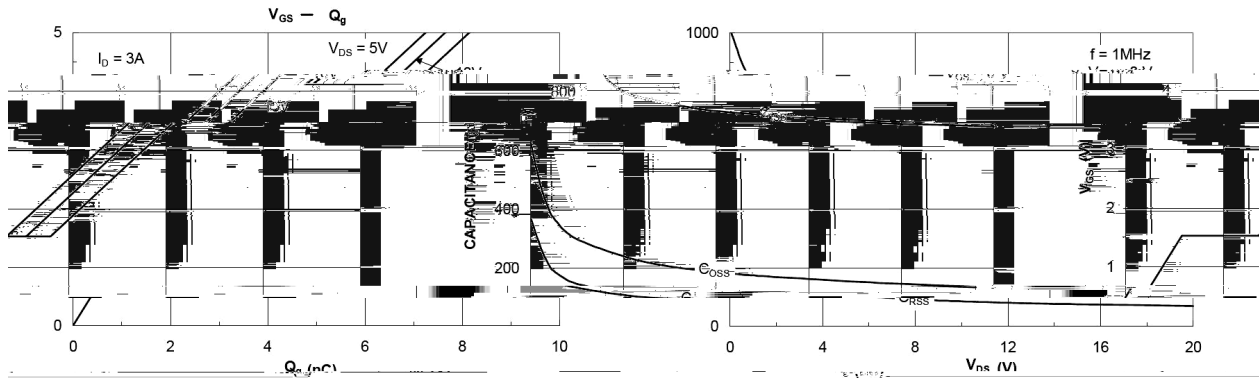


חברת החשמל תשלם 11.4 מיליארד ש"ח

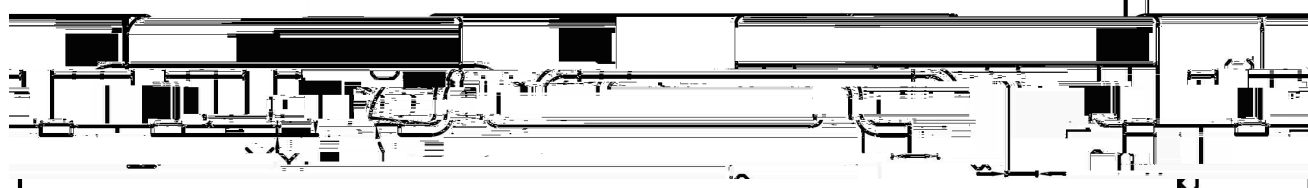


Dimensions in Millimeters				Dimensions in Millimeters			
Max	Symbol	Min	Max	Symbol	Min	Max	Symbol
	A	1.70	510	E	1.35	175	
	B	0.70	1.60		0.70	1.60	
	C	5.80	6.20	R	10.30	0.60	
	D	1.27 BSC		P	0°	7°	
0.40		1.25		0.12		0.22	

/ Marking Instructions

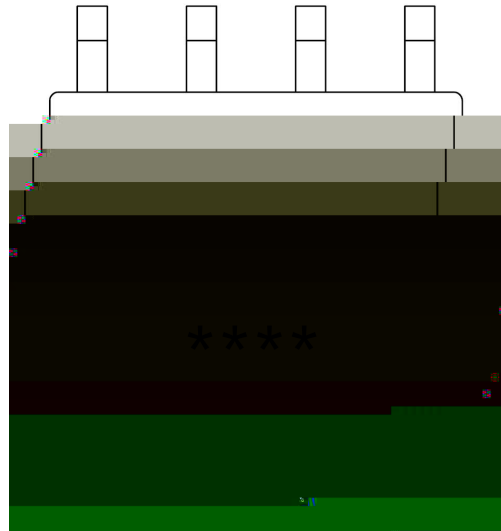

9926

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

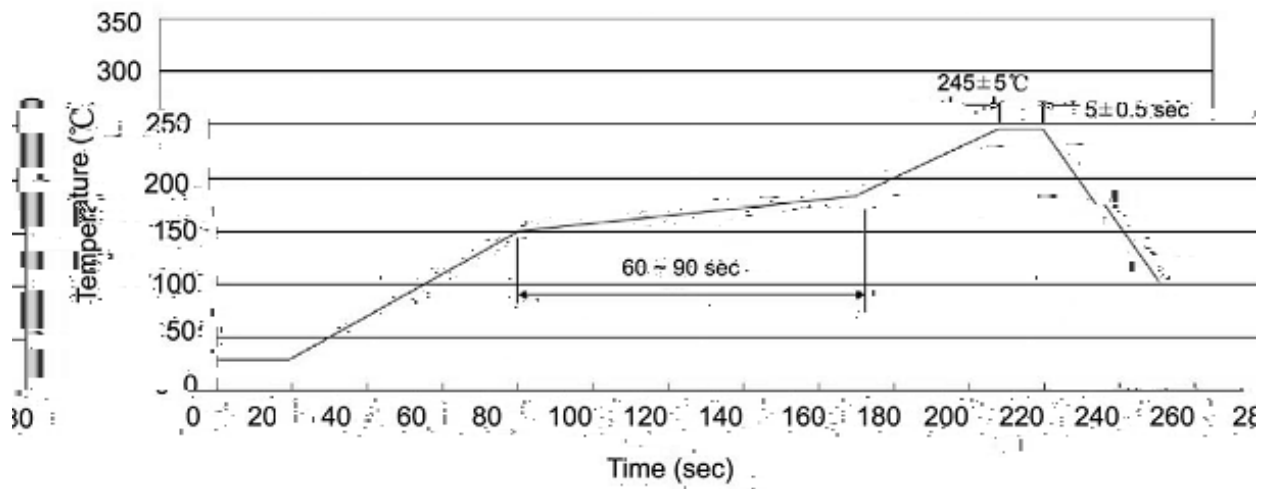 $\pm$ $\pm$ $\pm$ $\pm$

/ Resistance to Soldering Heat Test Conditions

 $\pm$ $\pm$

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
SOP/ESOP-8	4,000	2	8,000	6	48,000	13 ×12	360×360×50	380×335×366

/ Notices