

/ Descriptions


/ Features

$R_{DS(on)}$ C_{rss}


/ Applications

DC/DC

/ Equivalent Circuit



/ Pinning

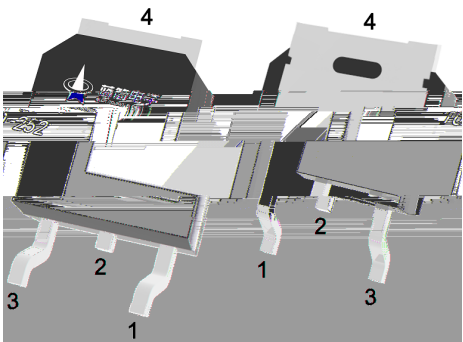

/ Marking

/ Absolute Maximum Ratings(Ta=25)

	θ		
	θ		




/ Electrical Characteristics(Ta=25)

		μ				
						μ
		μ				
						Ω
						Ω
		Ω				


/ Electrical Characteristics(Ta=25)

		μ				

/ Electrical Characteristic Curve

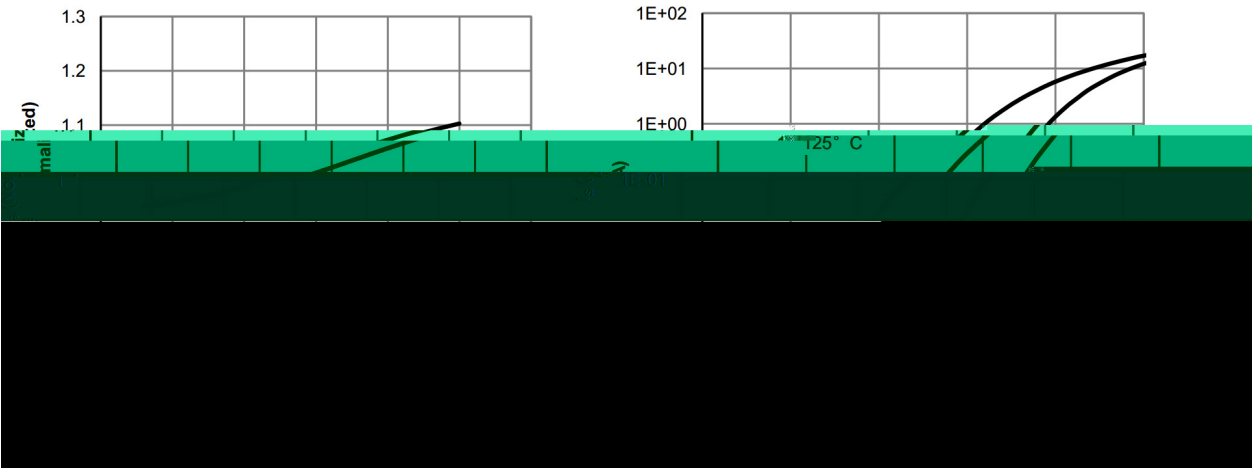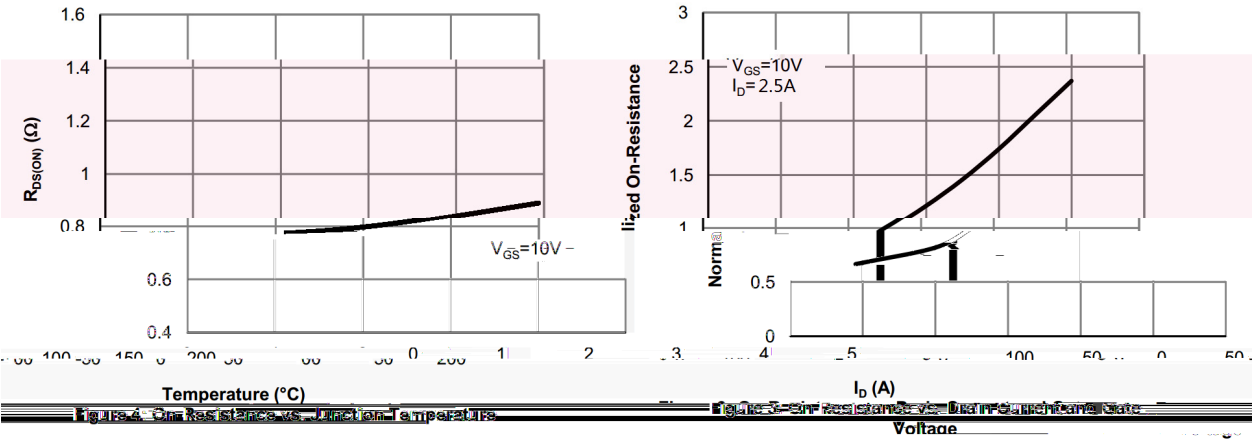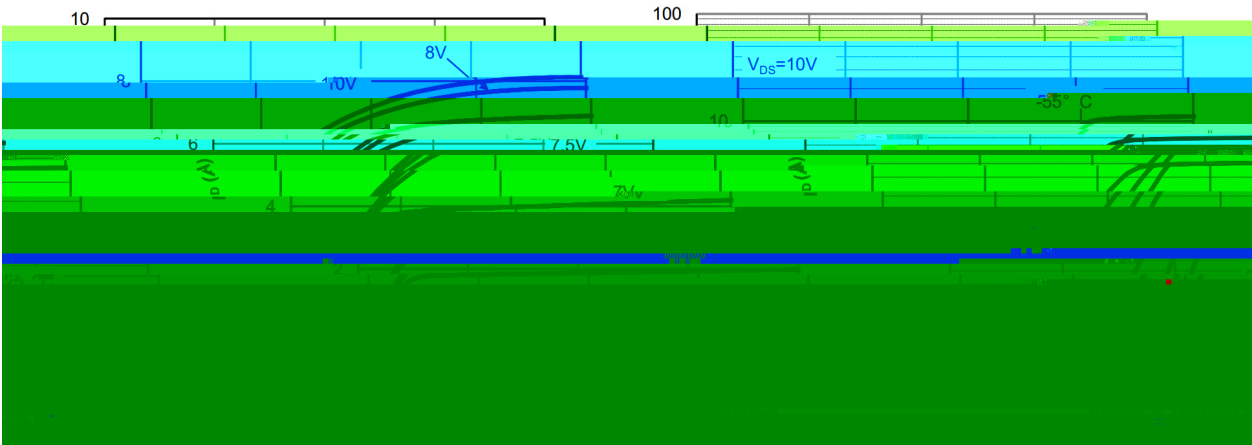

/ Package Dimensions

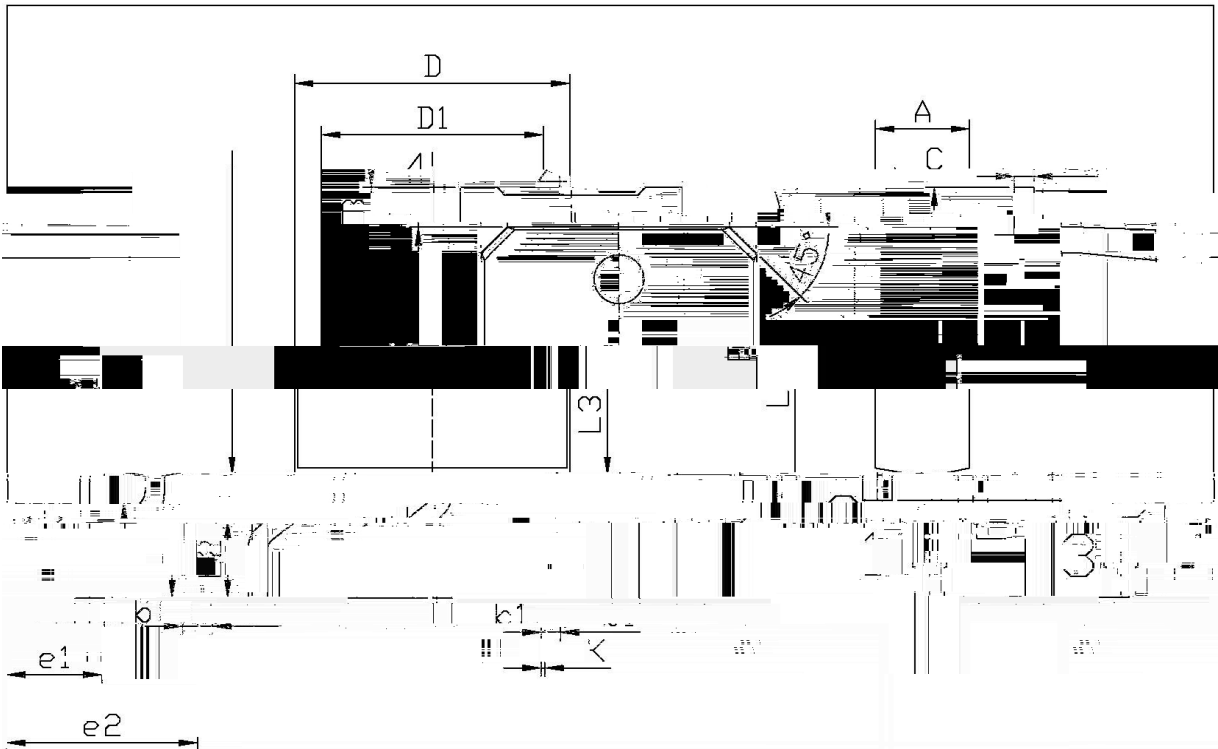


单位: mm

Symbol			Dimensions In Millimeters			Symbol			Dimensions In Millimeters		
			Min						Min		
E			5.95		6.25	A			2.20		2.40
e1			2.24		2.34	R			0.95		1.25
L			9.85		10.35	b1			0.75		0.85
C			0.45		0.55	I			1.70		2.00
D			6.45		6.75	D1			0.60		0.90
K			5.10		5.50	D1			0.00		0.10

T0-252

/ Marking Instructions

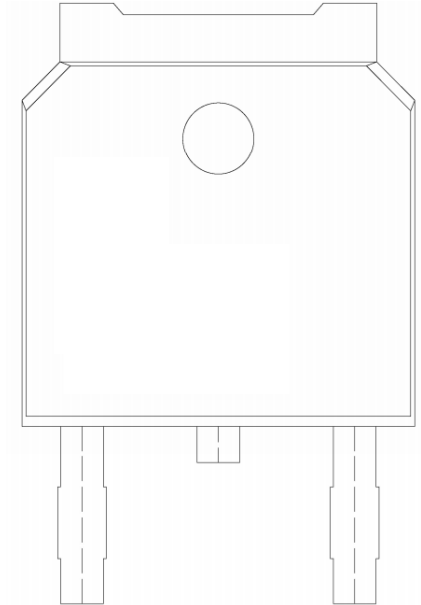

70R900C

[illegible] $\pm$ $\pm$