

BRDS22WQ~BRDS220WQ

/ Descriptions

20~200V 2.0A

/ Features


AEC-Q101

/ Applications

/ Equivalent Circuit




/ Pinning

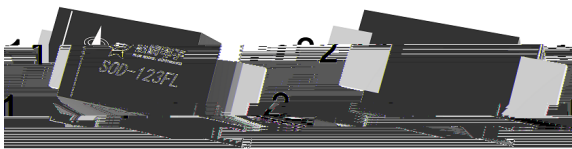


PIN	DESCRIPTION
1	Cathode
2	Anode

The recommended mounting pad size

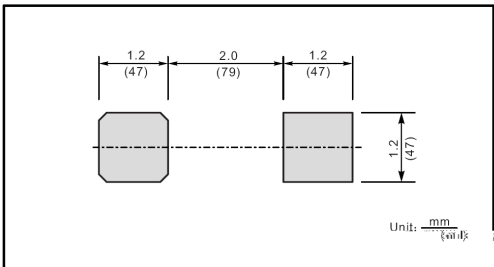


/ Marking


/ Electrical Characteristic Curve

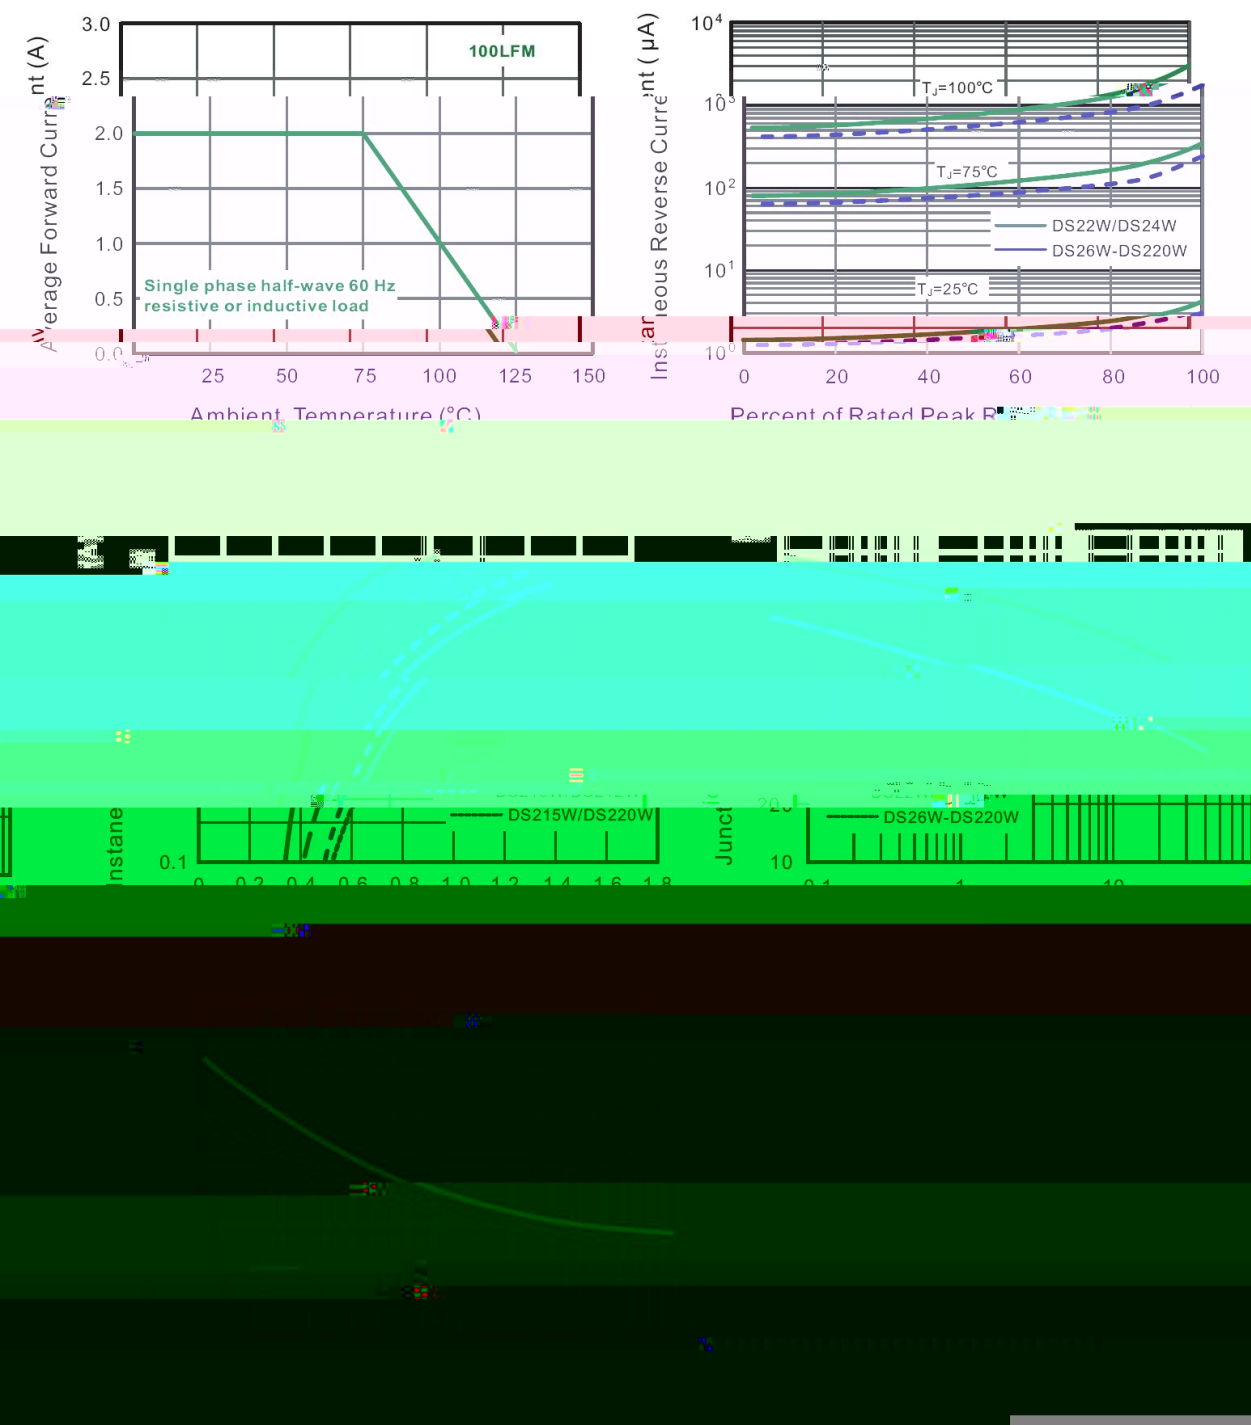

/ Package Dimensions

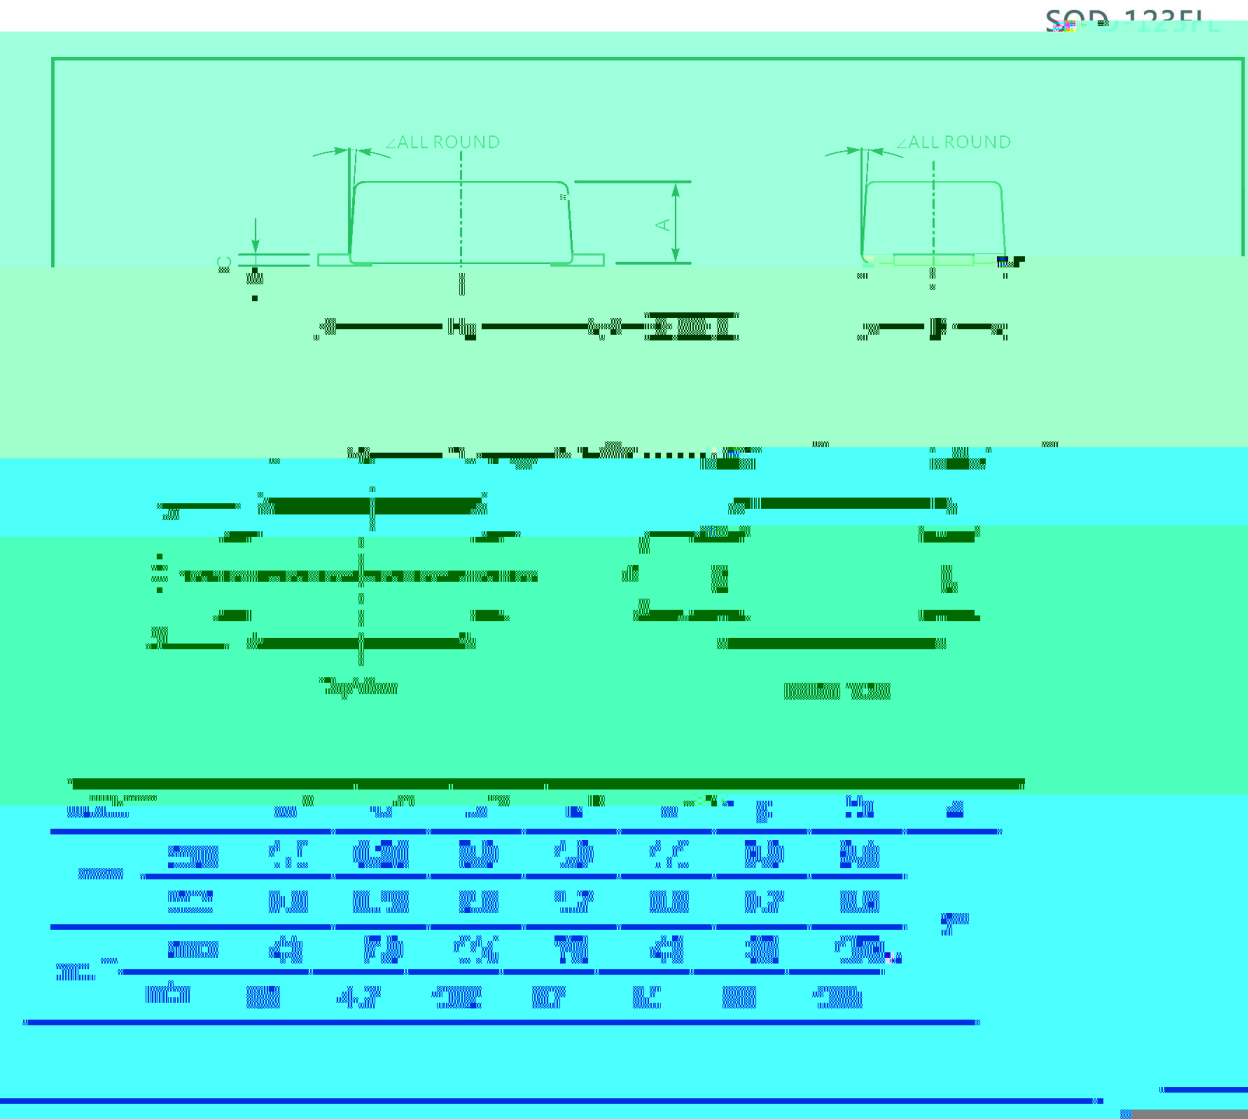

/ Marking Instructions

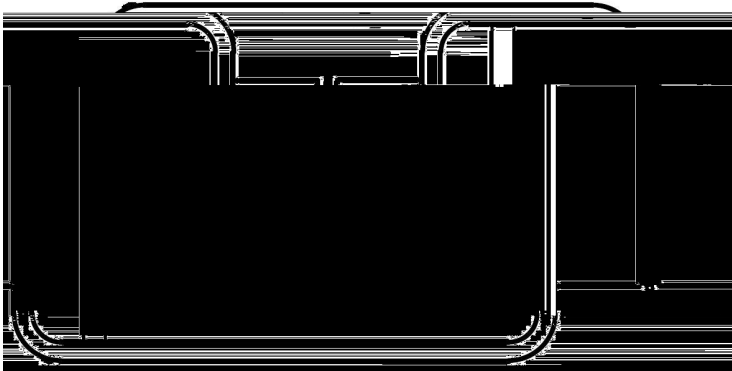


S22

Q

S22

Marking

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

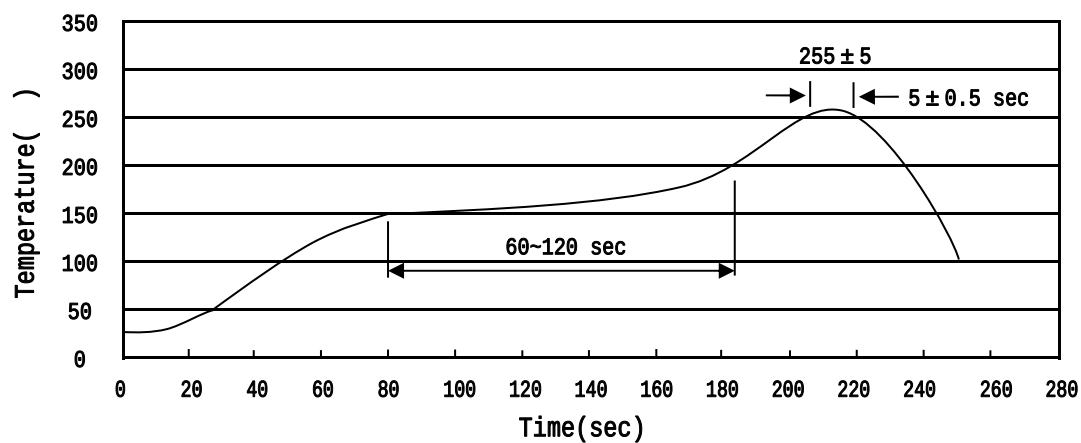 $\pm$ $\pm$ $\pm$ $\pm$

/ Resistance to Soldering Heat Test Conditions

 $\pm$ $\pm$ / **Packaging SPEC.**

封装形式	包装数量					包装尺寸		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱	：		箱

/ Notices