


/ Descriptions

/ Features


--

/ Applications

/ Equivalent Circuit



/ Pinning

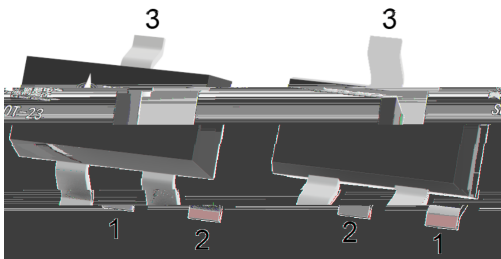

/ Marking

/ Absolute Maximum Ratings(Ta=25)

μ			
μ			
			℃
			℃

/ Electrical Characteristics(Ta=25)

						μ
		μ				
		μ				

/ Electrical Characteristic Curve

Fig.1 Non-Repetitive Pulse Power vs.Pulse Time


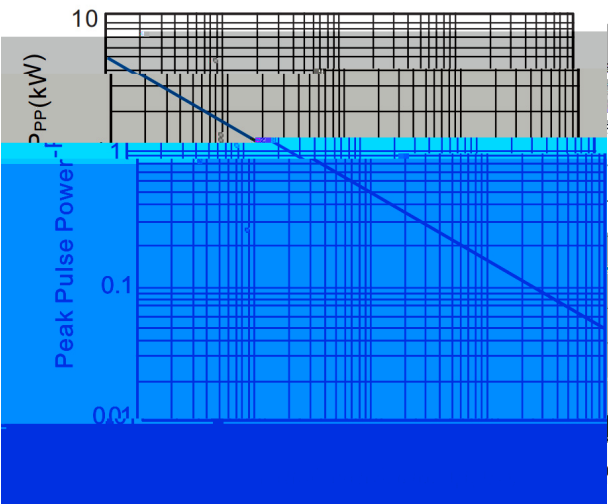



Fig.2 Pulse Waveform

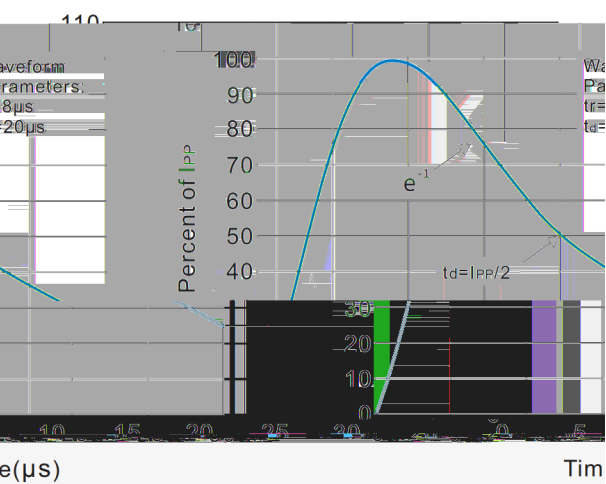


/ Package Dimensions

SOT-23


单位: mm

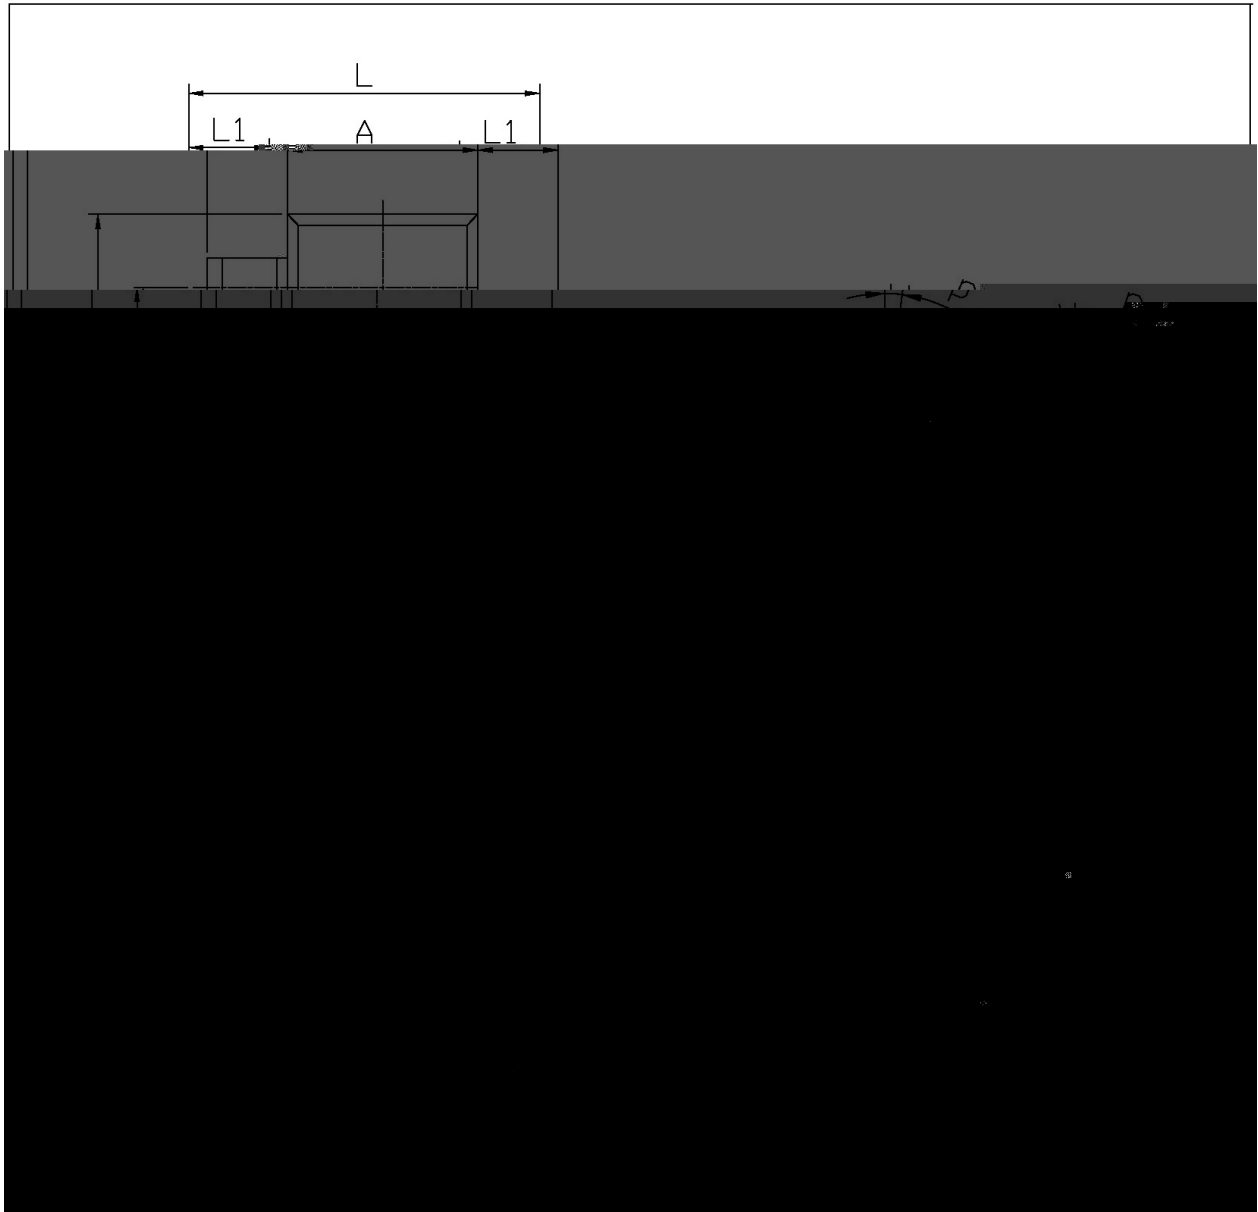

/ Marking Instructions

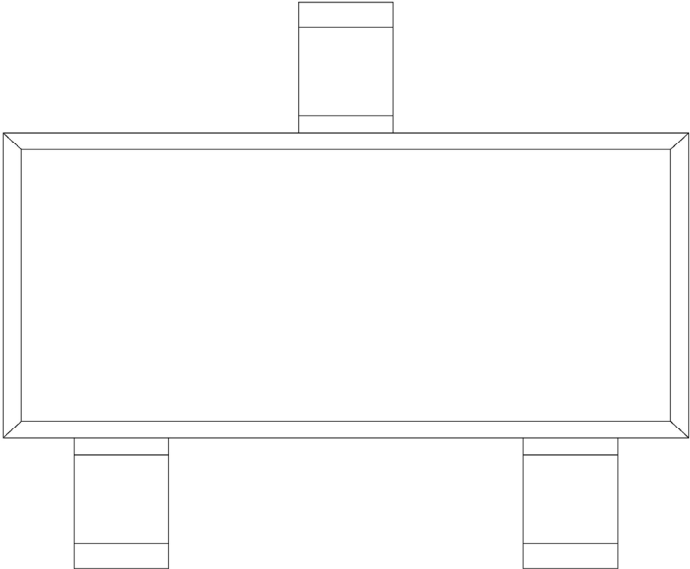

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

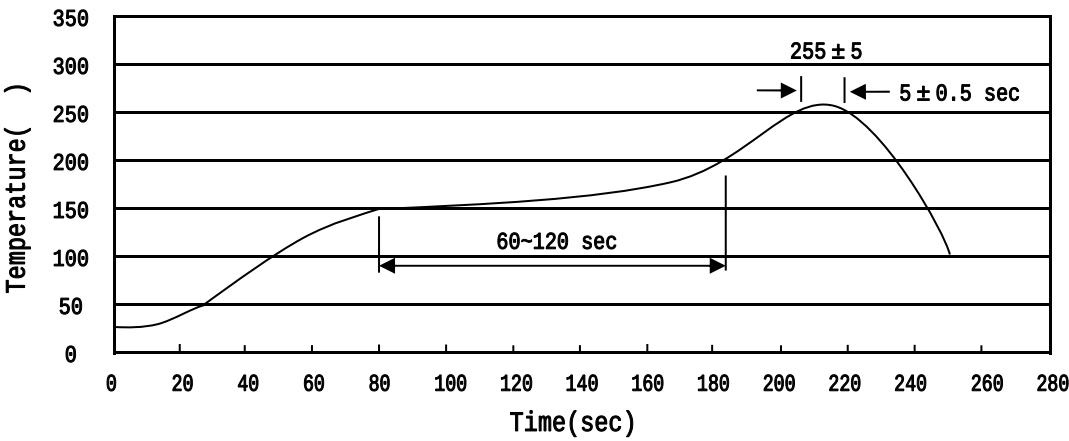

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

/ Notices