

DFN1006-2L

ESD

1ns

20KV



IEC61000-4-2

4




ESD

Ultra small package, Response Time is Typically<1ns, ESD>20kV per Human Body Model,IEC61000-4-2 Level 4 ESD Protection,HF Product.

MP3

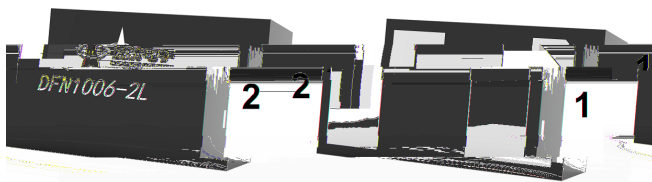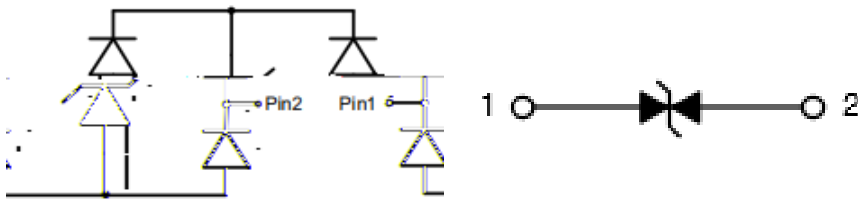


μ			
μ			
		$\pm$	
		$\pm$	

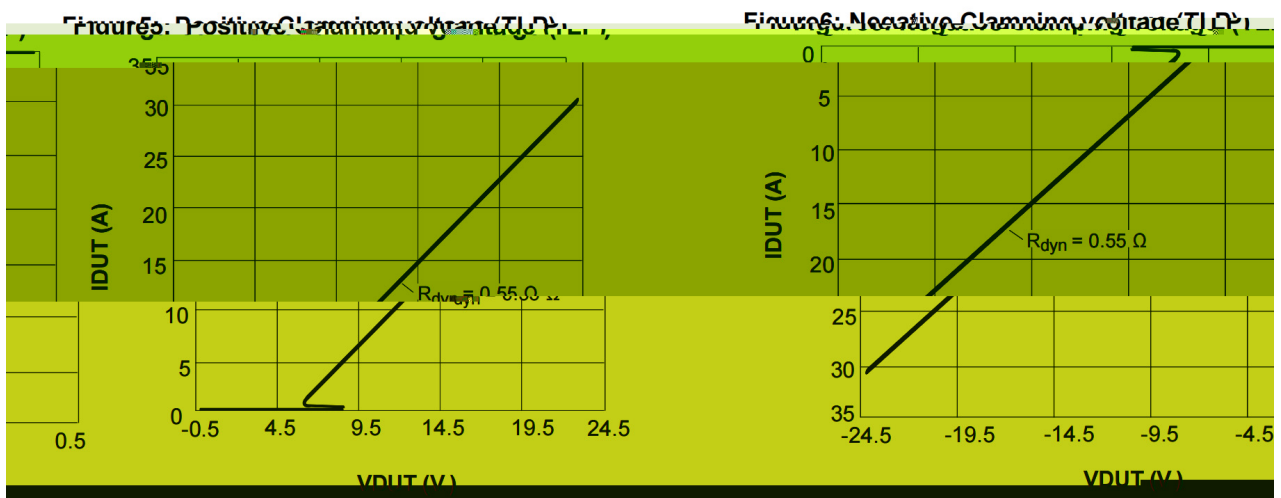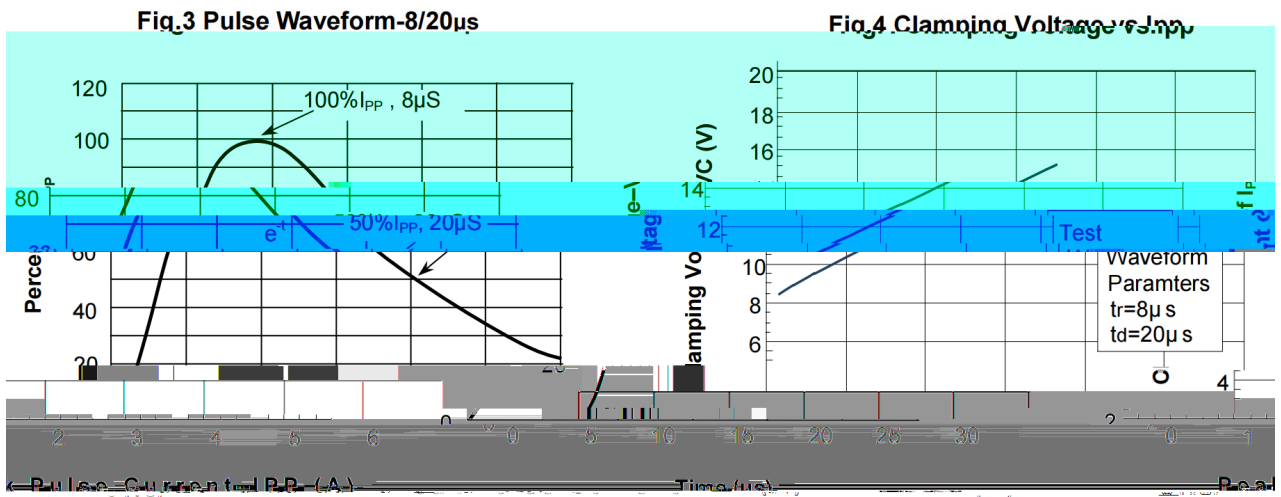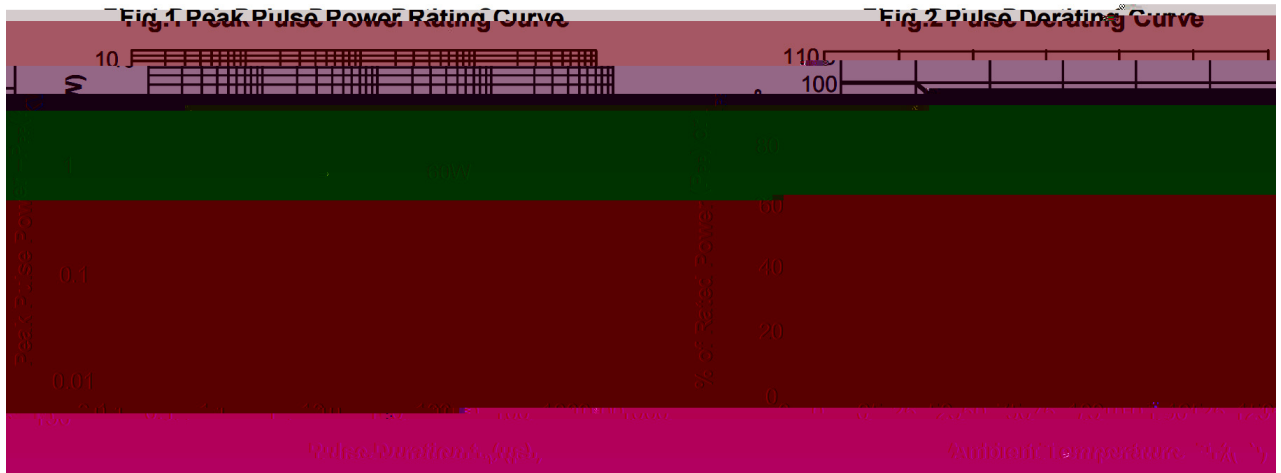

DFN1006-2L

Unit:mm

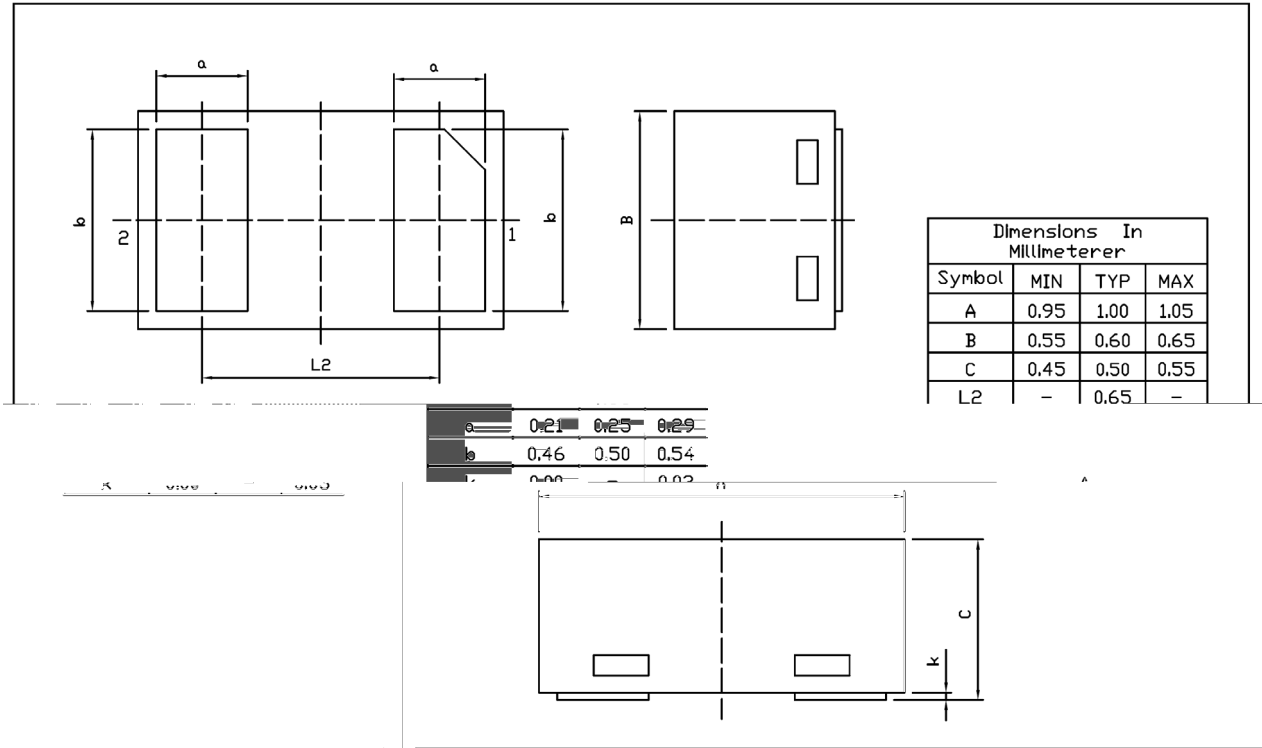


Doc:01-202100



3U

Temperature Profile for IR Reflow Soldering(Pb-Free)

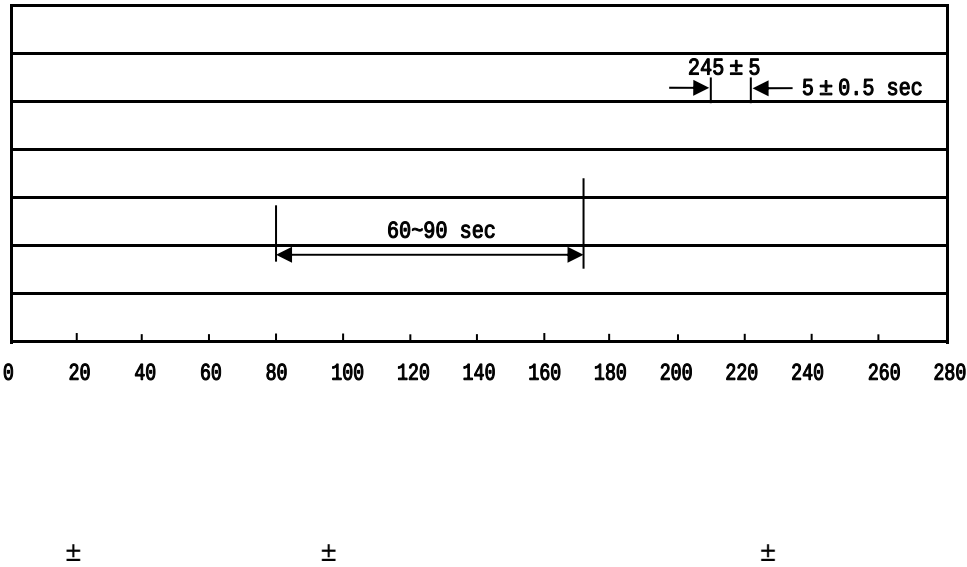

± ±

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
						"		