

ESD

/ Features

◆◆


 μ

◆◆◆◆◆

/ Applications

◆◆◆◆◆

/ Equivalent Circuit

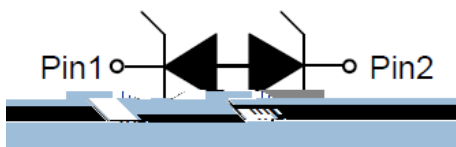

/ Pinning




/ Marking



/ Absolute Maximum Ratings(Ta=25)

μ			
μ			
		$\pm$	
		$\pm$	

Definitions of electrical characteristics




/ Electrical Characteristic Curve Ta=25 unless otherwise noted

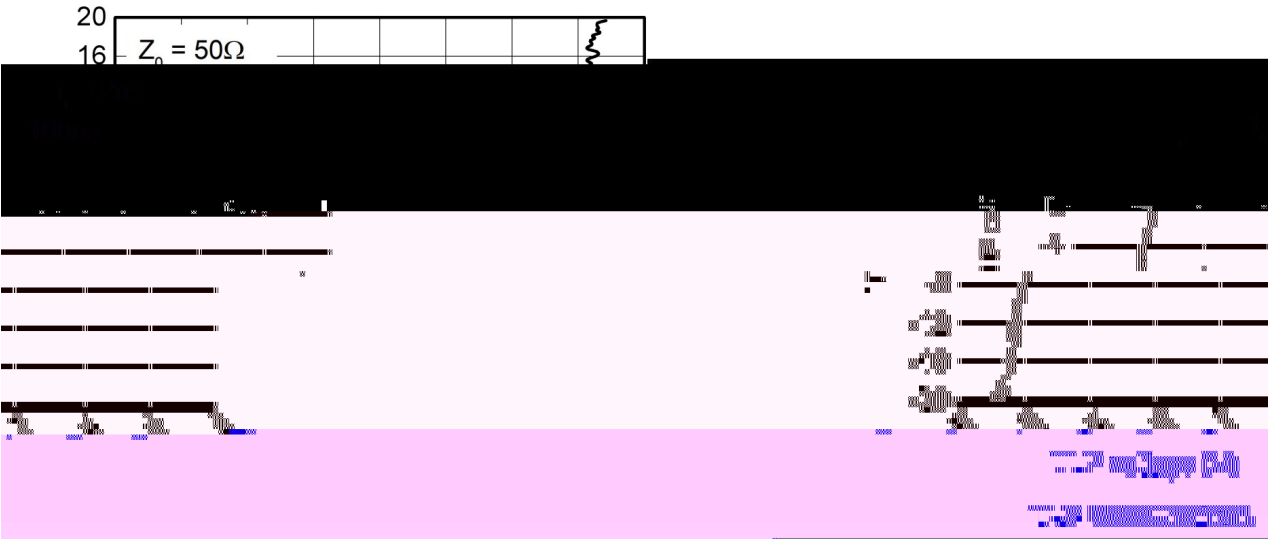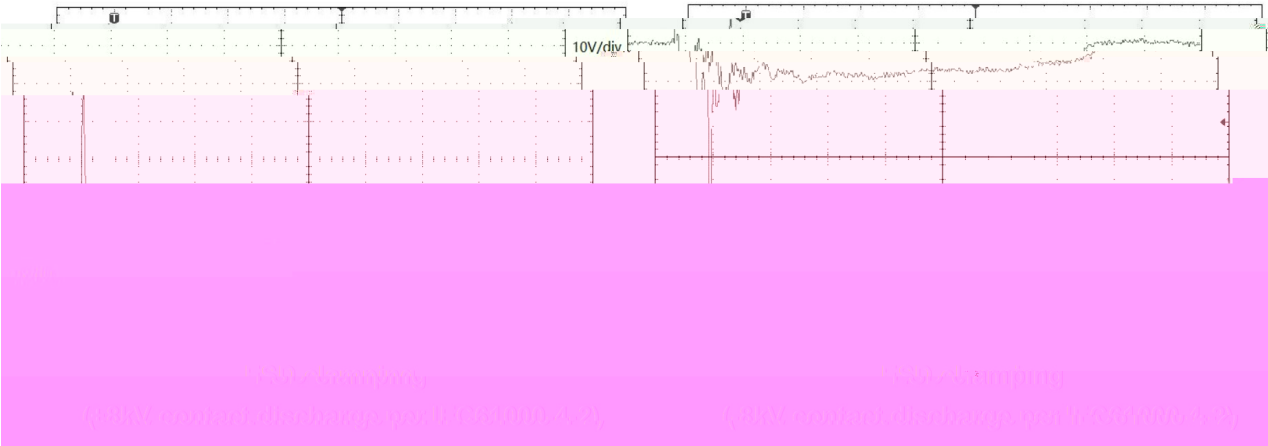

/ Package Dimensions




BRES4V5M1B2ZP



DATA SHEET



() / Temperature Profile for IR Reflow Soldering(Pb-Free)

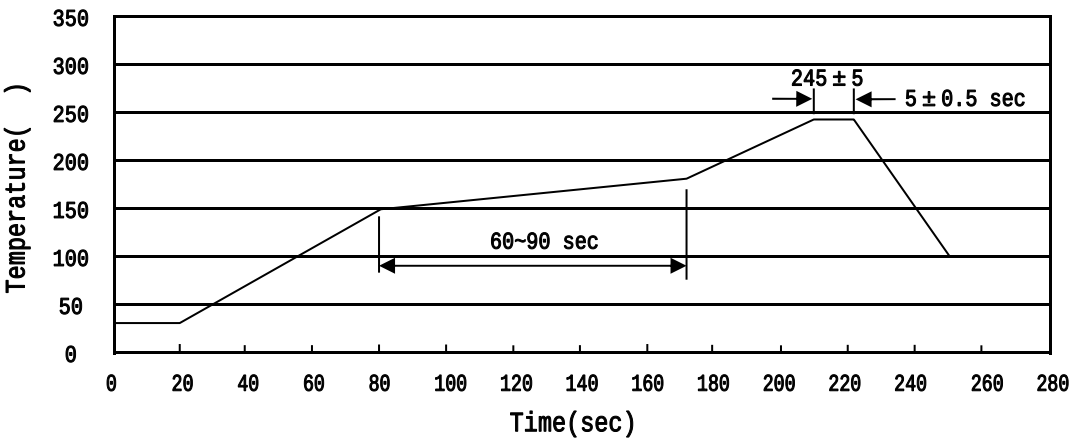

±

±

±

±

/ Resistance to Soldering Heat Test Conditions

±

±

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

/ Notices