


/ Descriptions

700V


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning

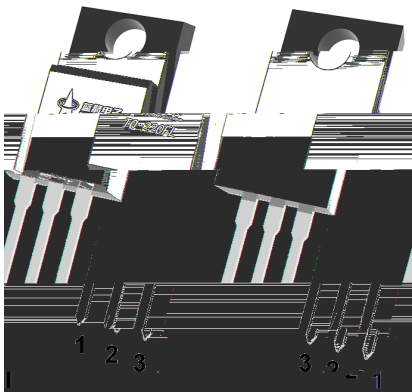

/ Marking

/ Absolute Maximum Ratings(Ta=25)

	θ		
	θ		




/ Electrical Characteristics(Ta=25)

		μ				
						μ
		μ				
						Ω
						Ω
		Ω				

/ Electrical Characteristics(Ta=25)

		μ				

/ Electrical Characteristic Curve

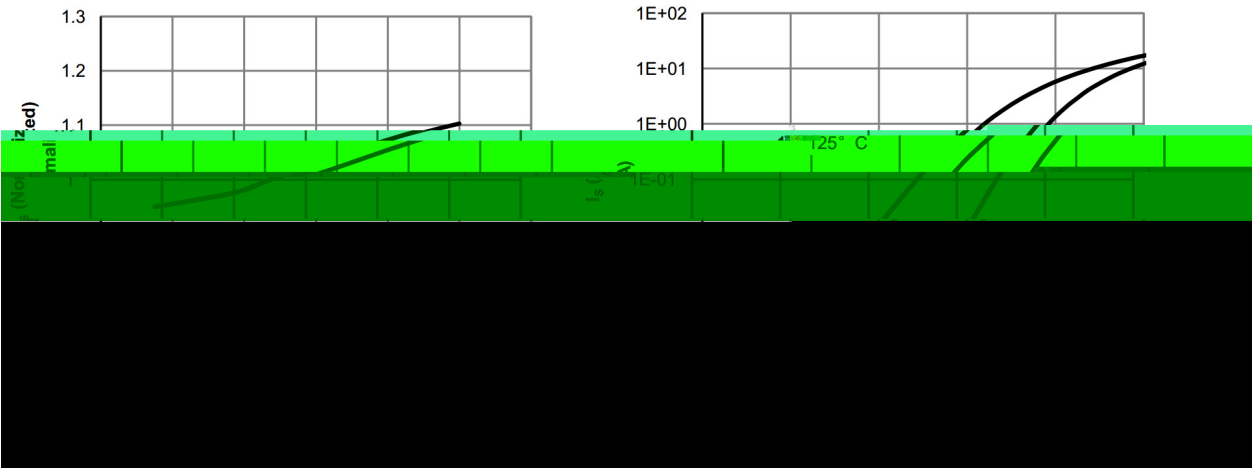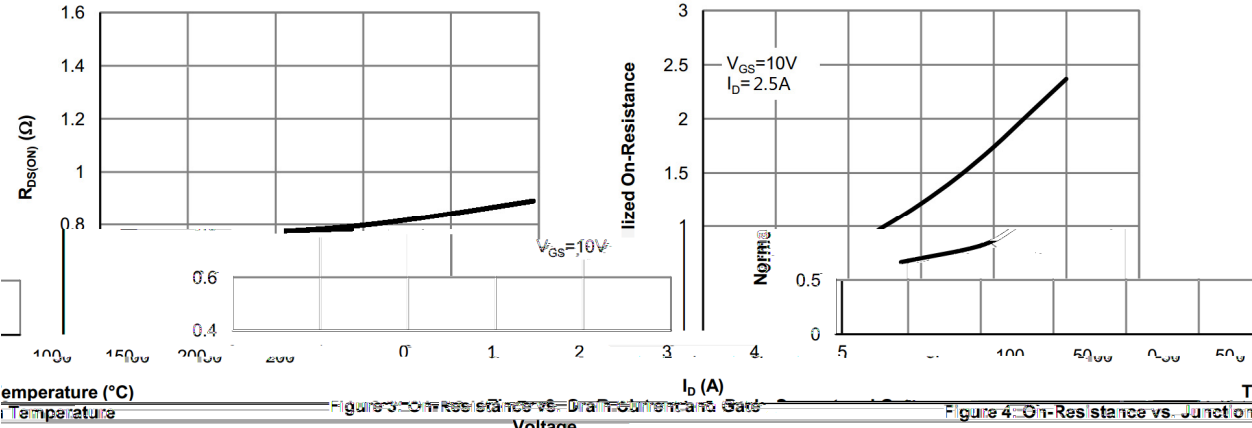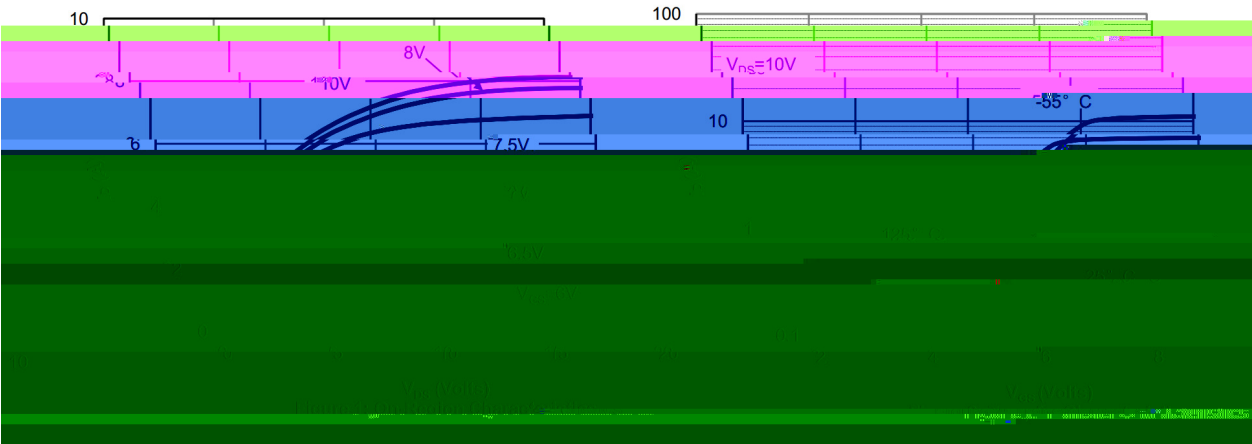

/ Electrical Characteristic Curve



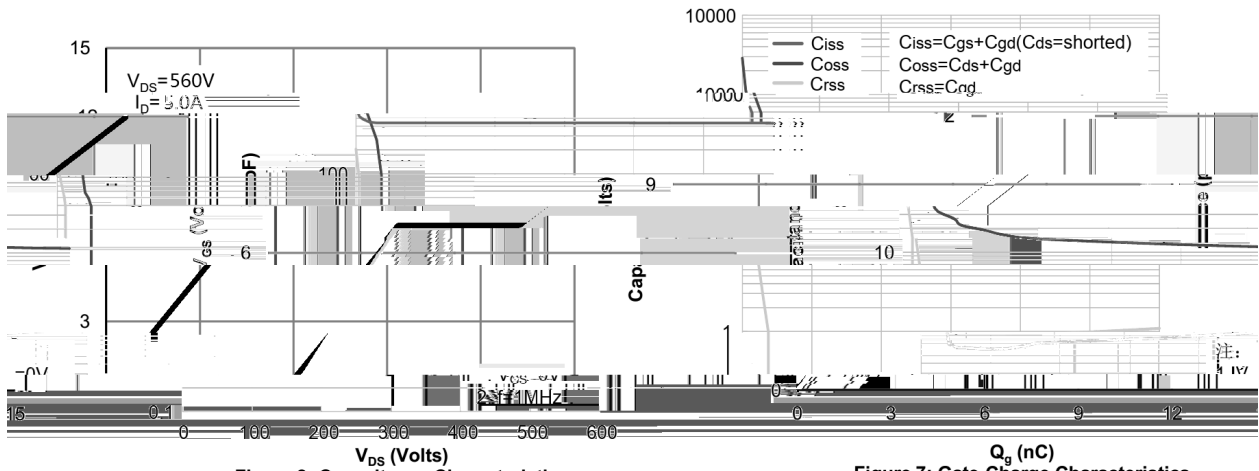



Figure 8: Capacitance Characteristics


Figure 7: Gate-Charge Characteristics

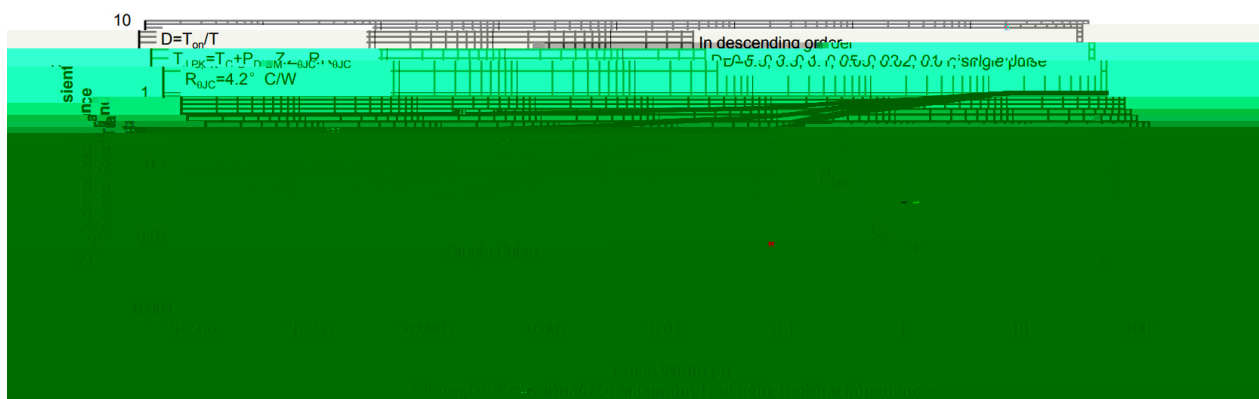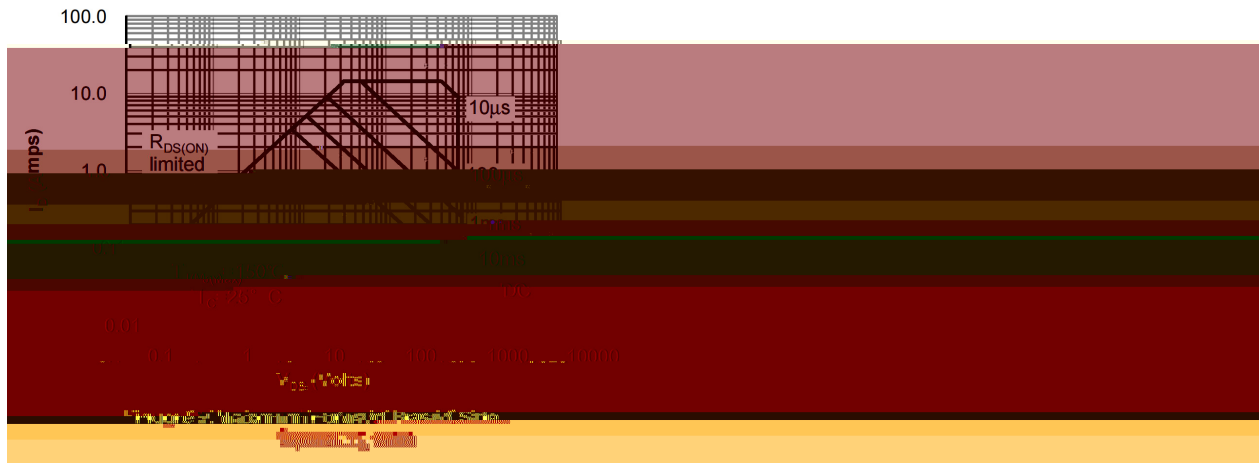

BRFL70R900C

/ Marking Instructions

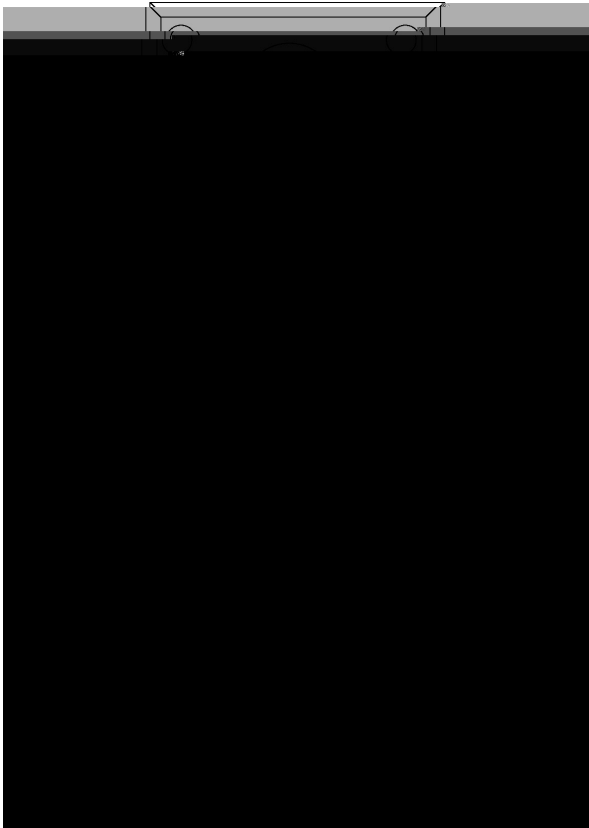

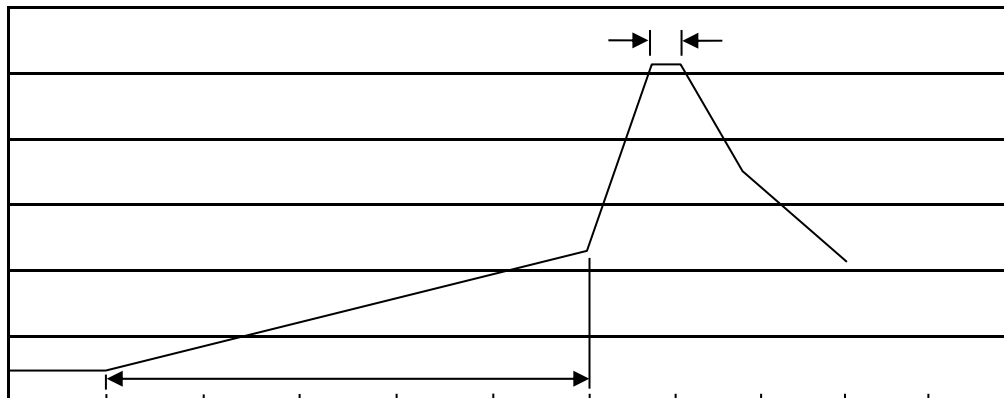 $\pm$ $\pm$

8 8