

/ Descriptions

/ Features


AEC-Q101

/ Applications

/ Equivalent Circuit





/ Pinning

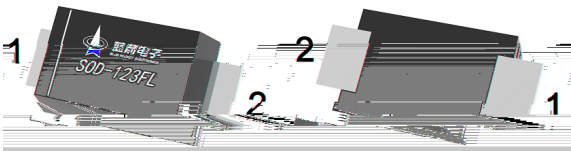


PIN	DESCRIPTION
1	Cathode
2	Anode

The recommended mounting pad size

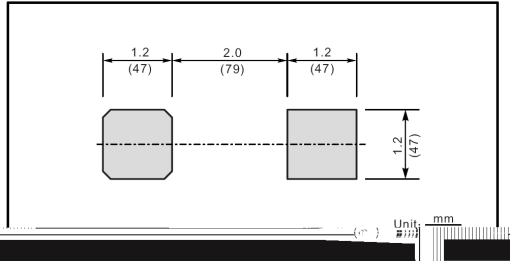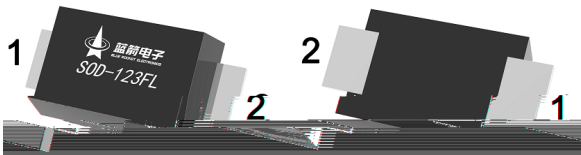

/ Marking




/ Absolute Maximum Ratings(Ta=25)

			±	
			±	
		θ		
		θ		
		θ		

[illegible]


[illegible]



/ Electrical Characteristics(Ta=25)


								μ		

/ Electrical Characteristic Curve

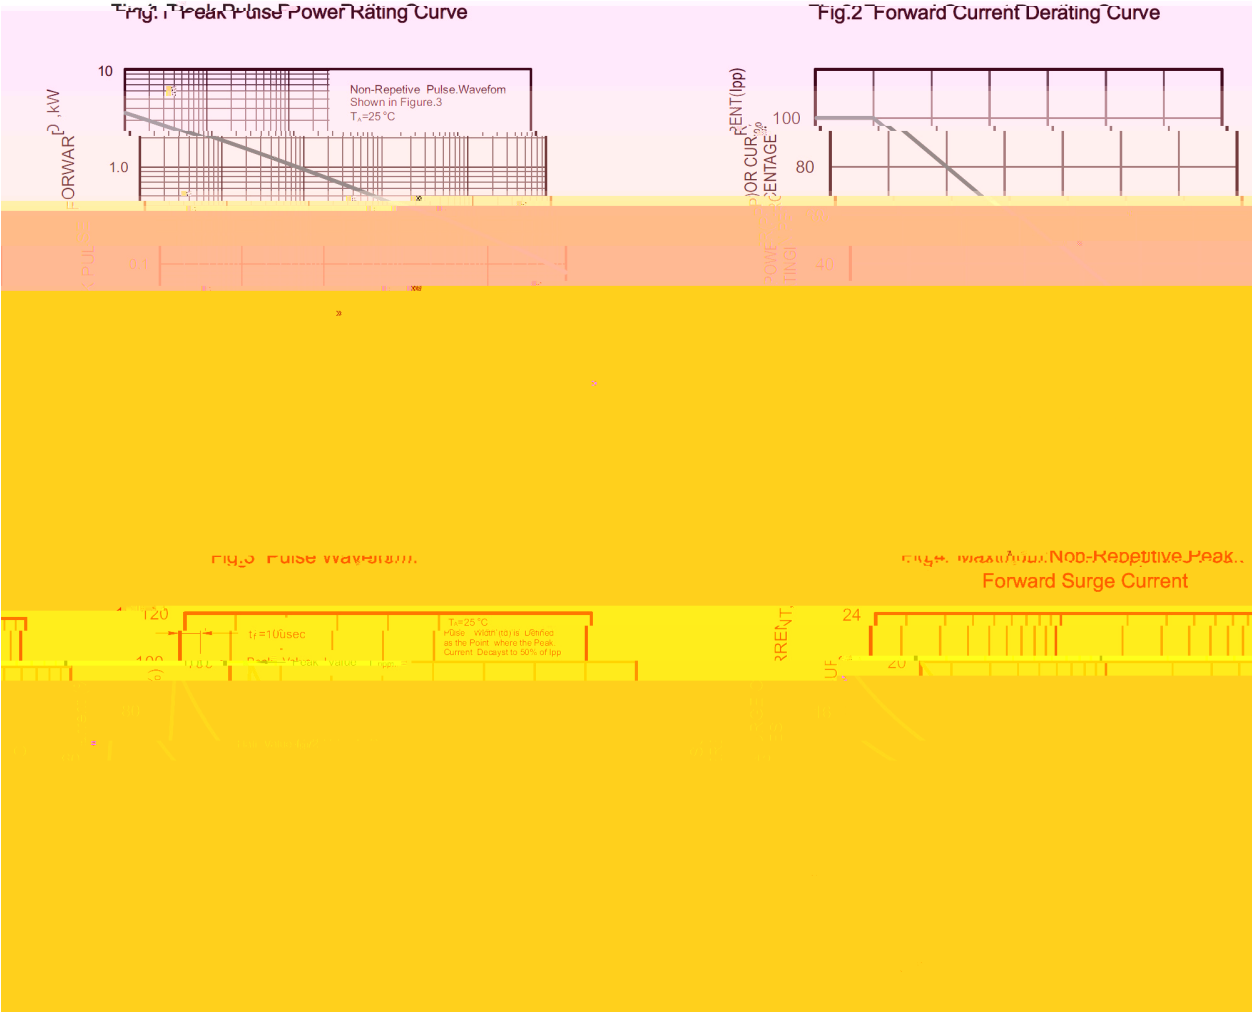


/ Package Dimensions

SOD-123FL

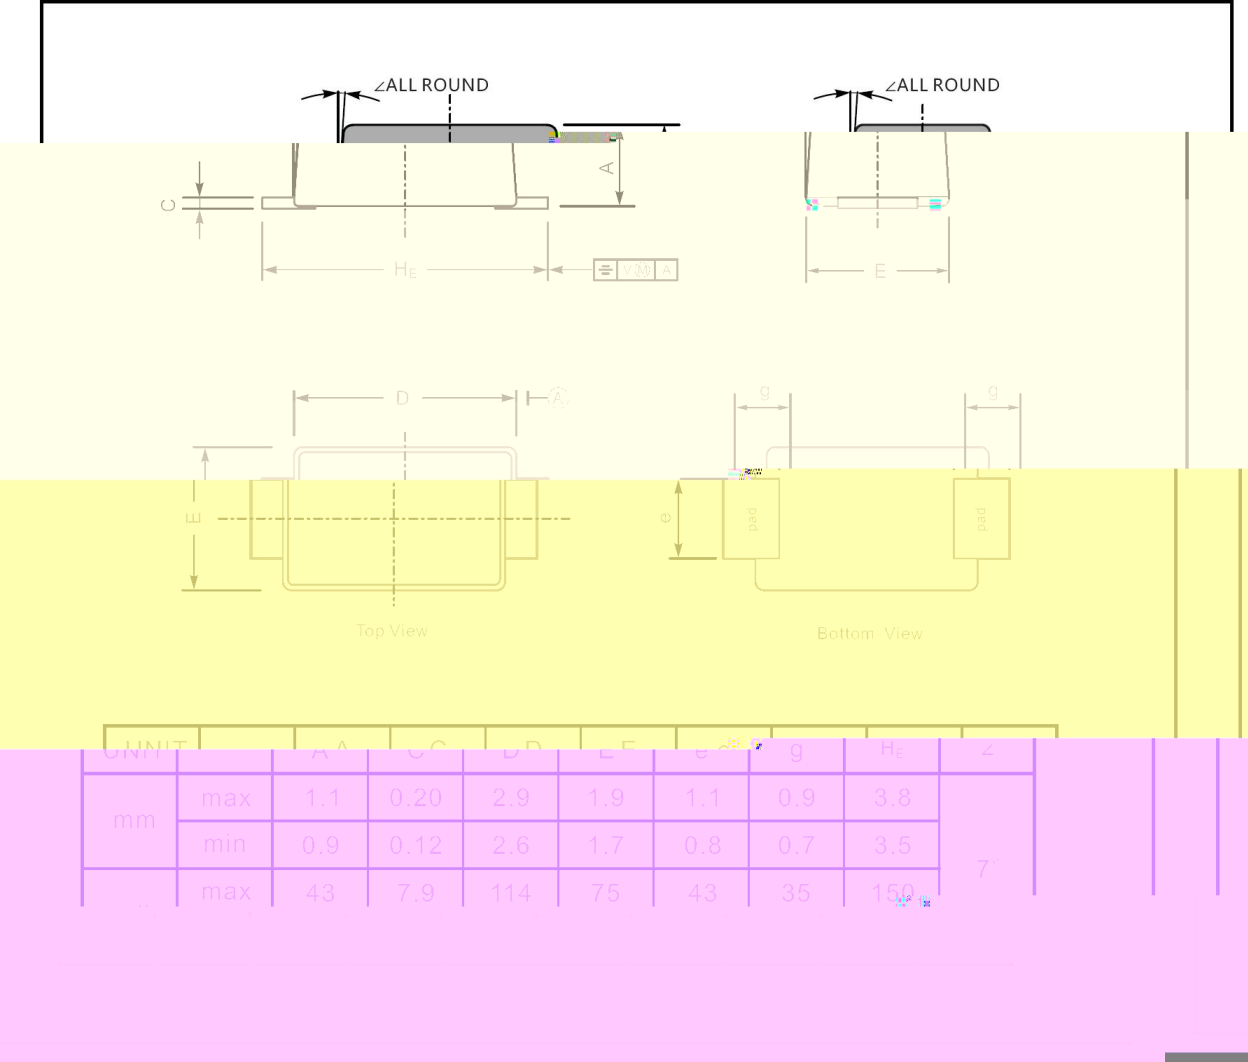


/ Marking Instructions

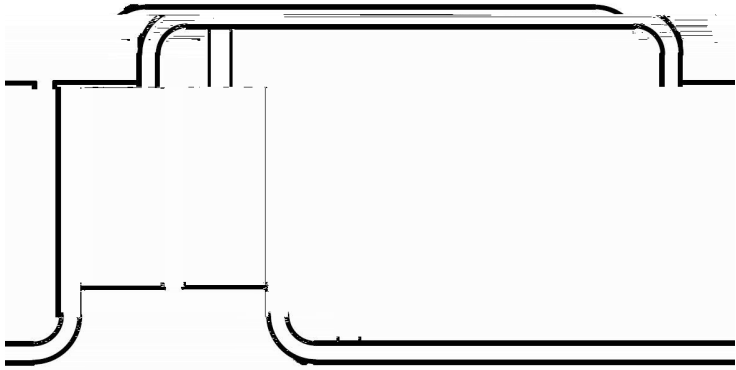

AE

Q

AE

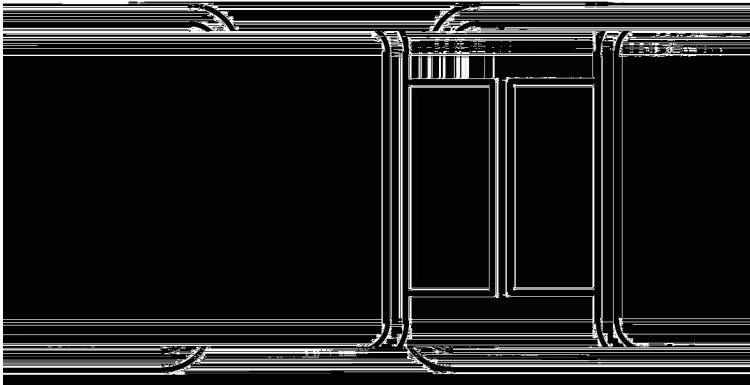


CAE

Q

CAE

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

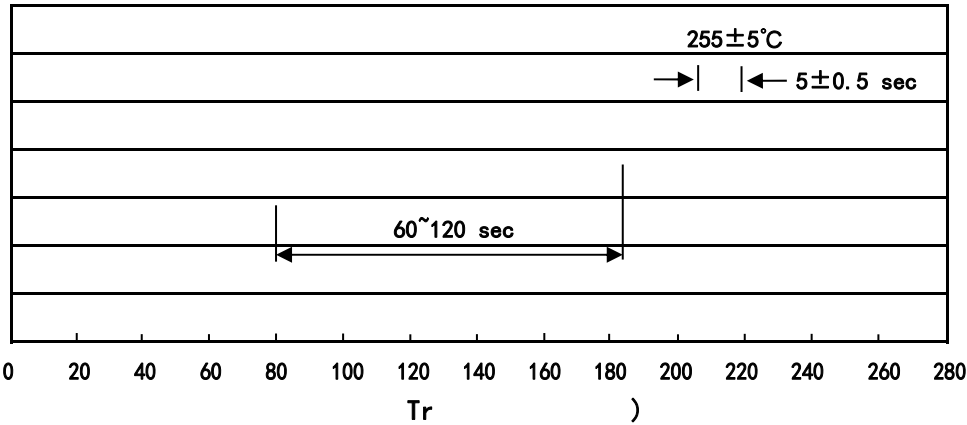

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

/ Notices