

Rev.A Apr.-2022



版本



Rev.A Apr.-2022

SOT-23 PNP Silicon PNP Digital transistor in a SOT-23 Plastic Package.

With built-in bias resistors, simplify circuit design, reduce a quantity of parts and manufacturing process,HF Product.

Switching applications, interface circuit and driver circuit applications.




PIN 1 IN PIN 2 GND PIN 3 OUT

Marking


HE32




Rev.A Apr.-2022

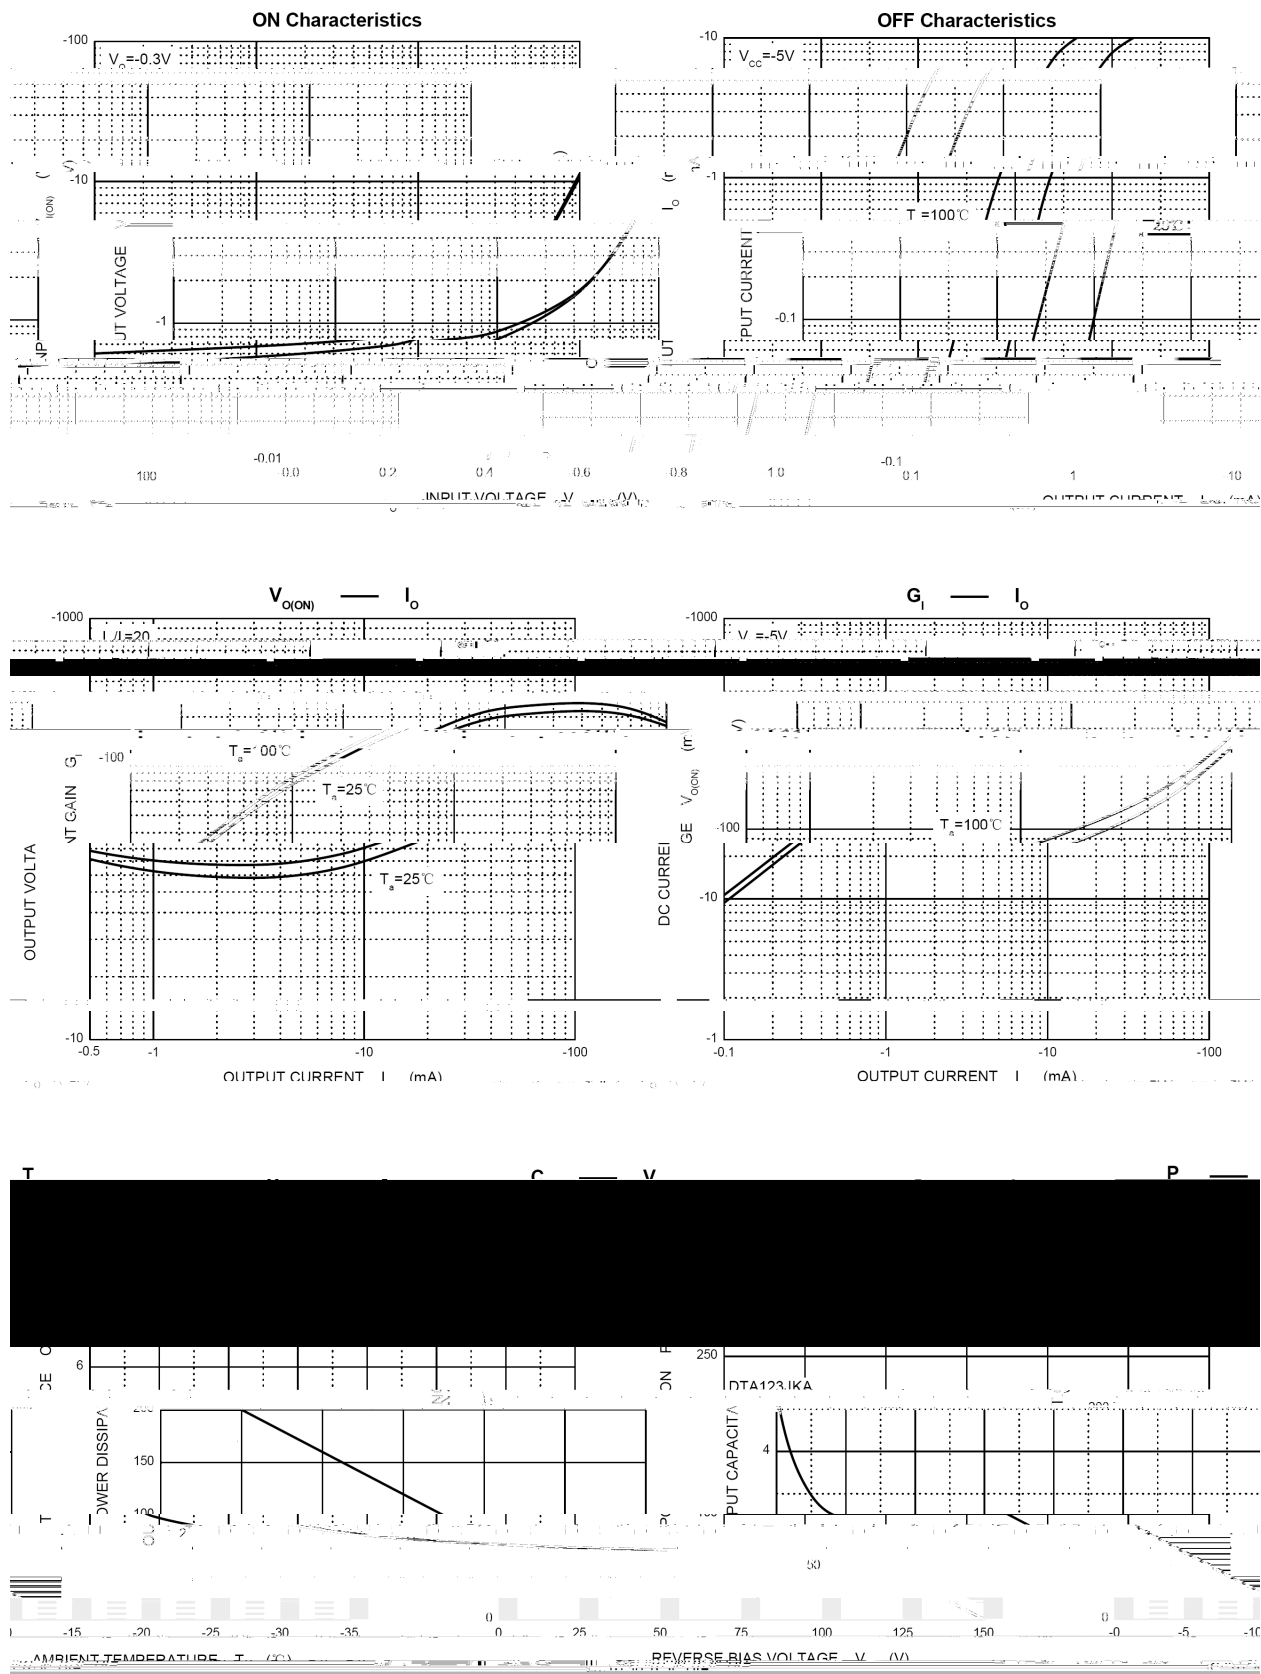


苗 株 100 株 100 株

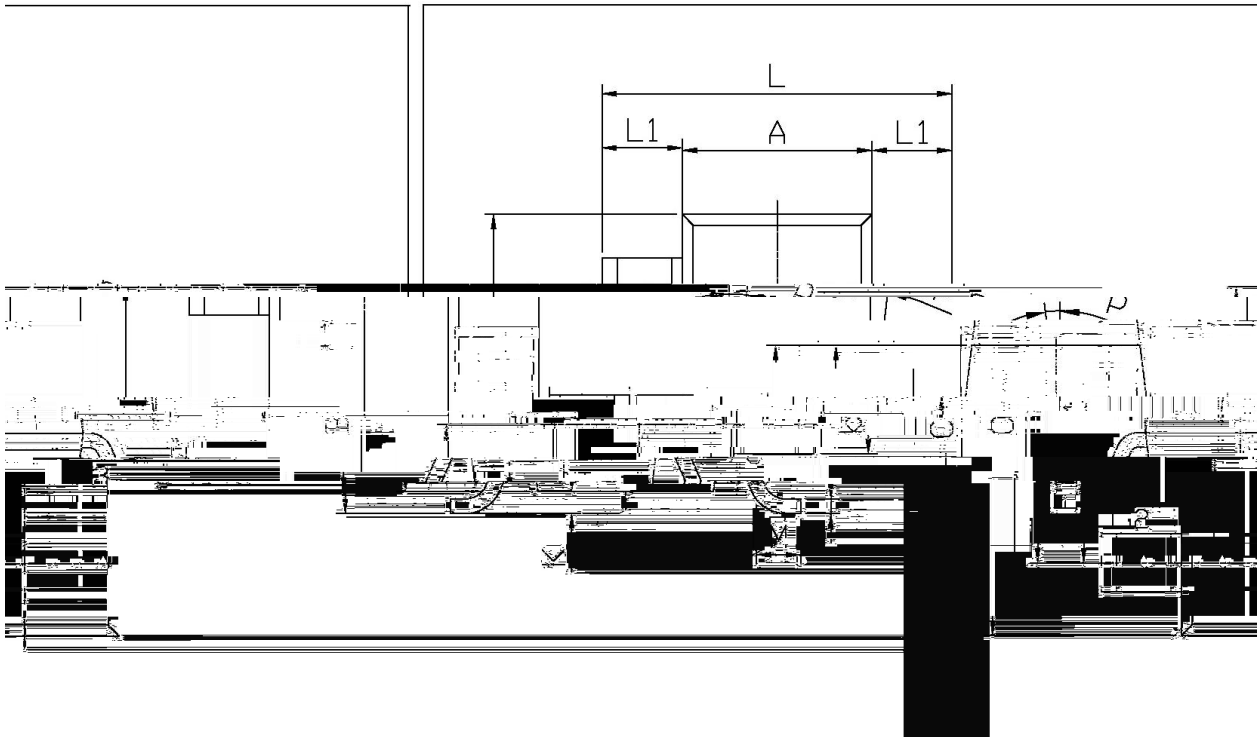

Symbol		Dimensions In Millimeters		Symbol		Dimensions In Millimeters	
		Min	Max			Min	Max
L		2.2	2.7	C		1.30Max	
1		0.45	0.65	2		0.92	1.20
A		1.15	1.50	c		0.05	0.20
B		2.70	3.10	K		0	0.10
E		0.10	0.20	P		0.20	MIN
E1		0.85	1.05	P		7°	
b		0.35	0.55	P			

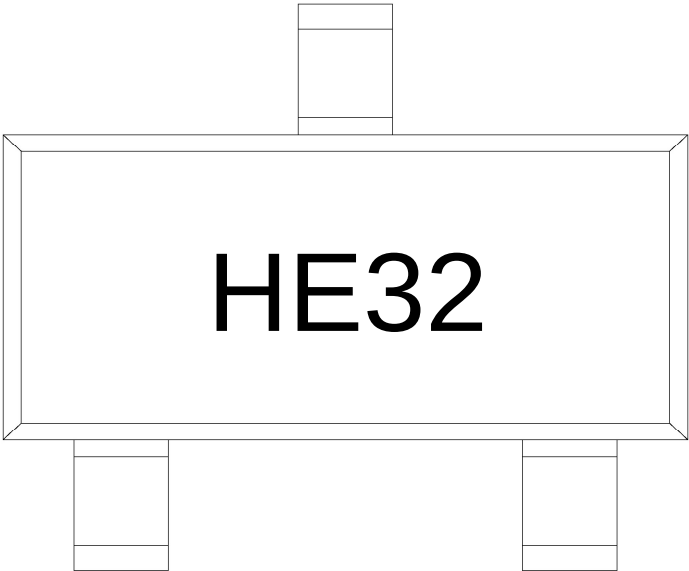

H
E32
Note:
H Company Code
E32 Product Type

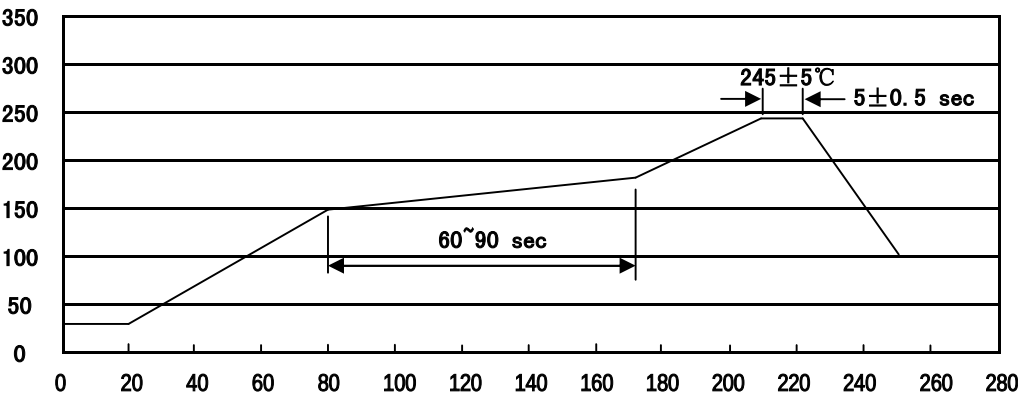

- Note:
- 1

150 180

60 90sec;

2

245±5

5±0.5sec;

3

2 10°C/sec.
- 1.Preheating:150~180°C, Time:60~90sec.

2.Peak Temp.:245±5°C, Duration:5±0.5sec.

3. Cooling Speed: 2~10°C/sec.

260±5°C

10±1 sec.

Temp.:260±5°C

Time:10±1 sec

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱
						"		