

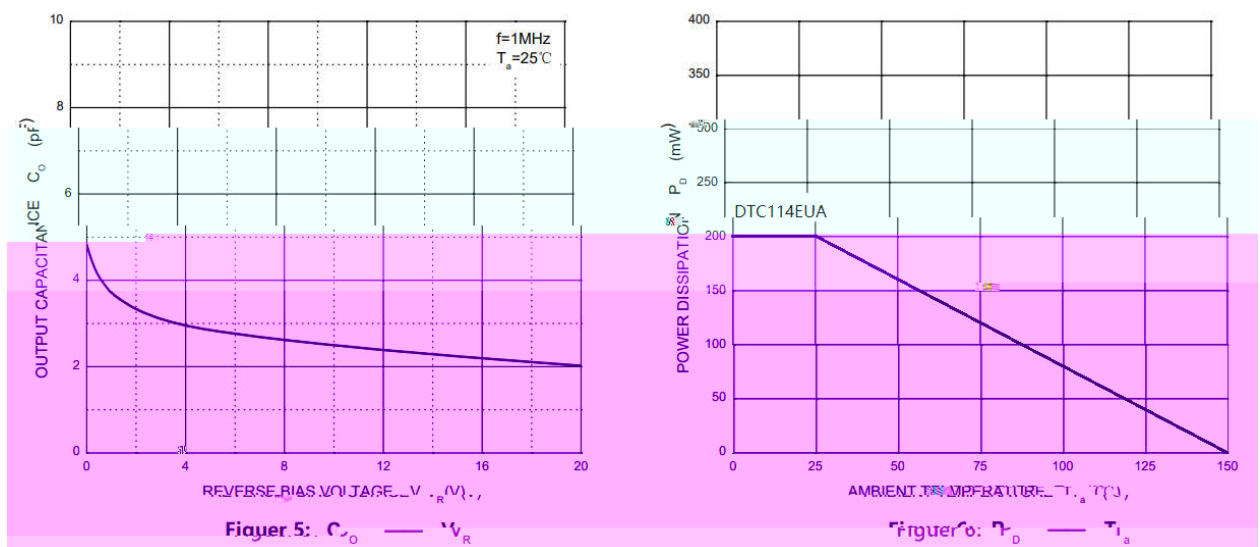
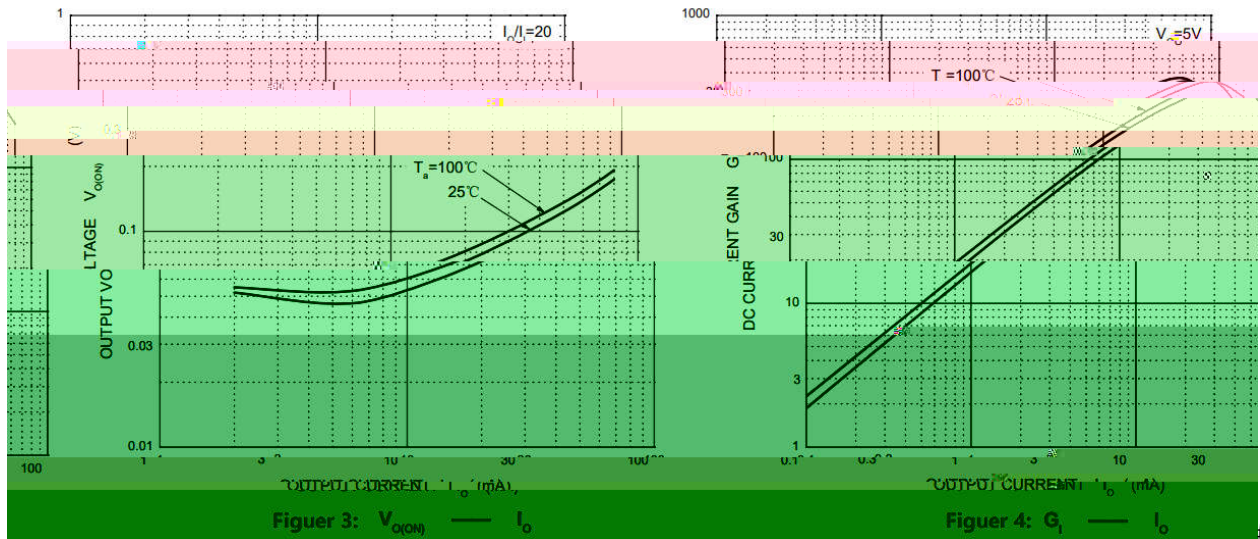


/ Electrical Characteristic Curve

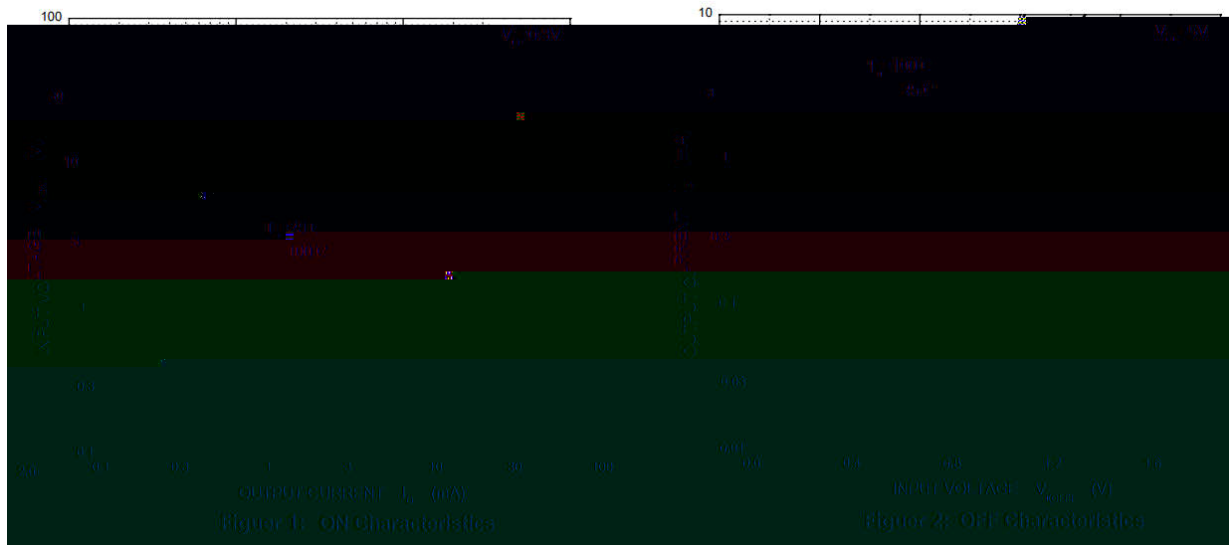

#

() /

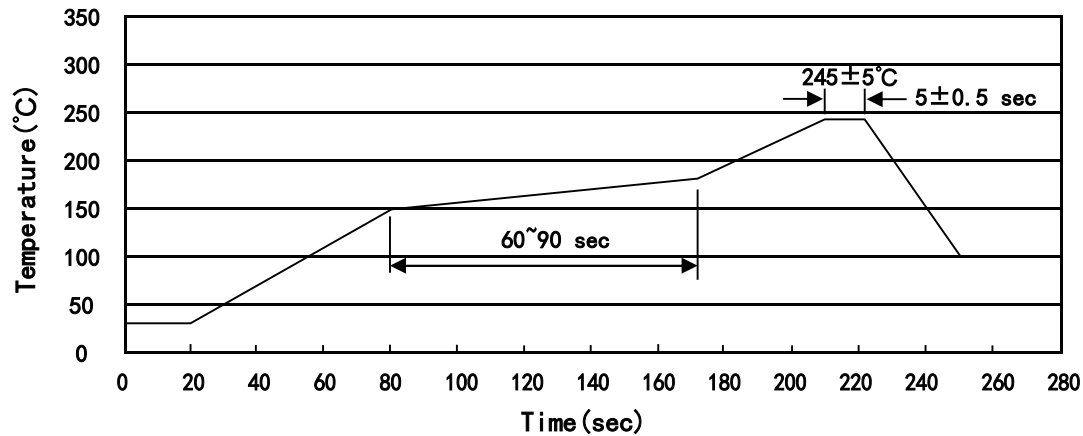

>. & 4#

N N*) NZ) `) a)7 %b# # # N! ?9 2 D&@1C4N\*)cNZ) H#<@ : 4`)ca)7 %!#
((R*±* *±)!*7 %b# # (!? DE#< : 3!4(R*±* H#BG9D&@.14*±)!*7 %!#
= (N) 57 %!# # # # =! P..A@1C#;3 J4#(cN) 57 %!#
#

/ Resistance to Soldering Heat Test Conditions

(`) $\pm^*$  # # N) $\pm$ N#7 %!# # # # < : 3!4(`)d * °C# # <@ : 4N)dN#7 %#

#

/ Packaging SPEC.

5## " "e#

?D%EDC #<13 # 封装形式#	S1#7 包装数量#					B: 17.1# 包装尺寸## -G1: : : 0#		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
; \$ < ' = (= #	=H))) #	N) #	=) H))) #	` #	(NZ) H))) #	] " f Z#	(NZ) f N () f NZ) #	=a) f = Z * f () * #

#

/ Notices

#