


DTC143EUA

VRW0656

QSQ

Vzlwfkqlj dssolfdwlrqv/ lqwhuidfh flufxlv dqg gulyhu flufxlv dssolfdwlrqv

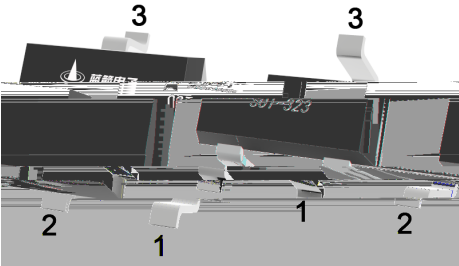


/ hFE Classifications & Marking

--	--

/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(Ta=25)


/ Electrical Characteristic Curve

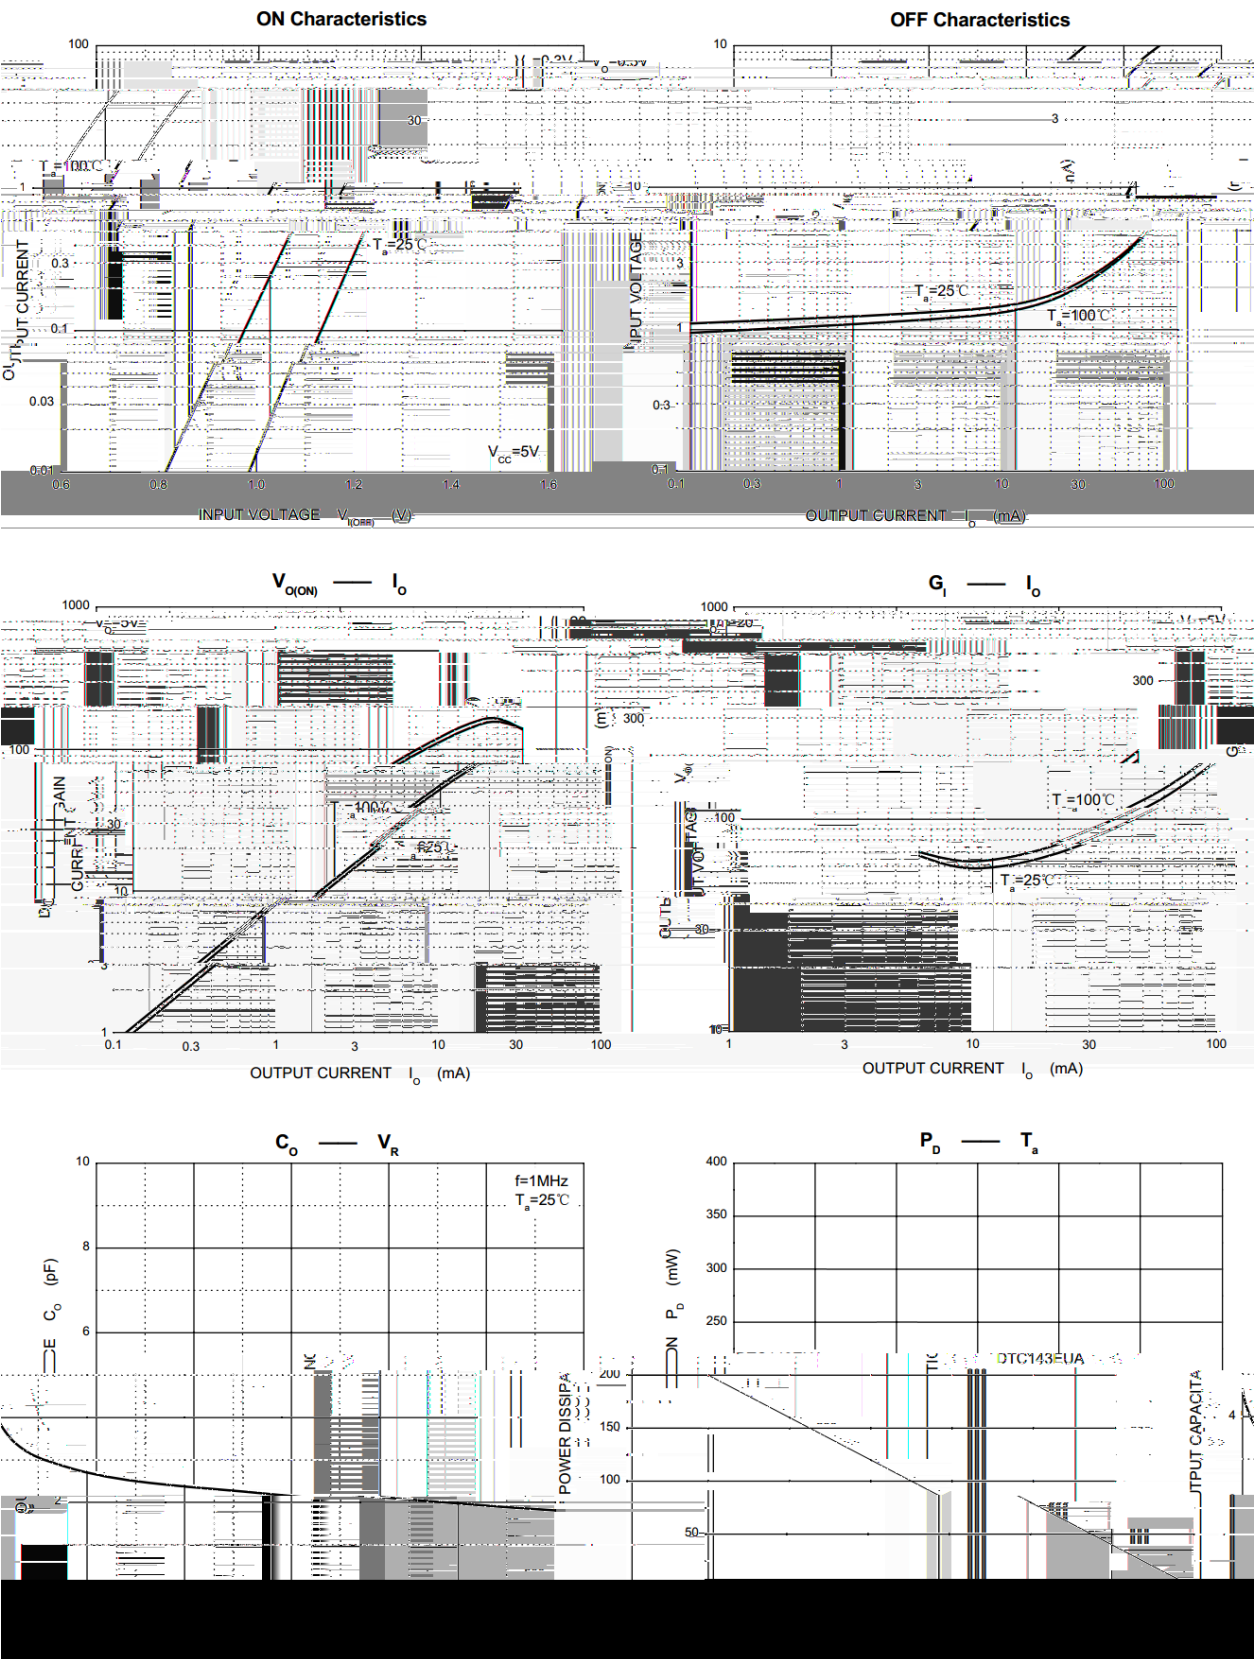

/ Package Dimensions


SOT-323

单位: mm

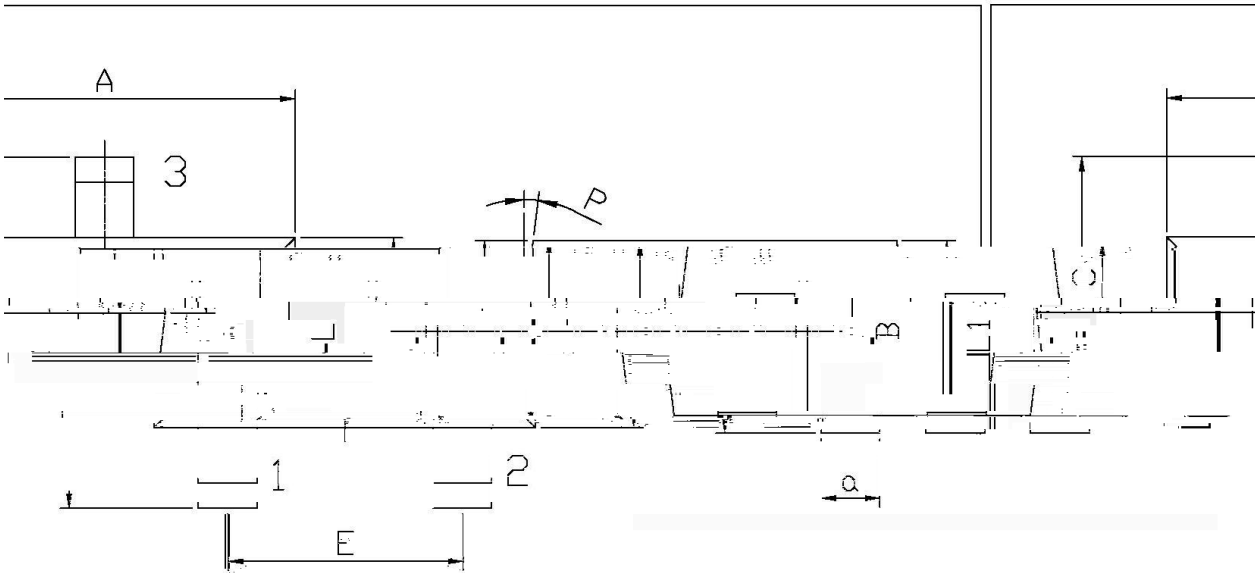

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
A	1.95	2.35	C	0.30	0.50
E	1.20	1.40	a	0.20	0.40
B	1.15	1.35	P	7°	

/ Marking Instructions

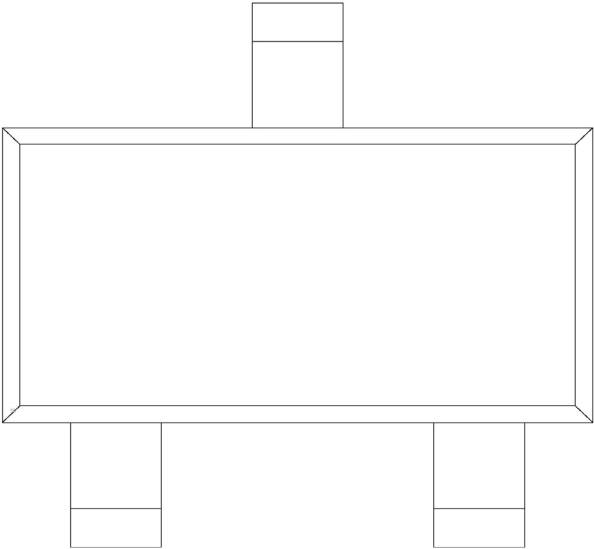

K

K

() / Temperature Profile for IR Reflow Soldering(Pb-Free)



$\frac{3}{8}$ $\frac{3}{8}$ $\frac{3}{8}$ $\frac{3}{8}$

2 $\frac{3}{8}$ 2 $\frac{3}{8}$ 2

/ Resistance to Soldering Heat Test Conditions

2 $\frac{3}{8}$ 2

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

/ Notices