


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit




/ Pinning



PIN	DESCRIPTION
1	Input Pin (~)
2	Input Pin (~)
3	Output Anode (+)
4	Output Cathode (-)

The recommended mounting pad size

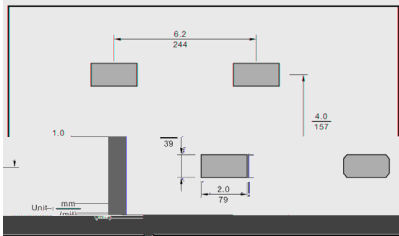

/ Marking

/ Absolute Maximum Ratings(Ta=25)


	θ		$^{\circ}\text{C}$
			$^{\circ}\text{C}$

×


/ Electrical Characteristics(Ta=25)

				μ
				μ

/ Electrical Characteristic Curve

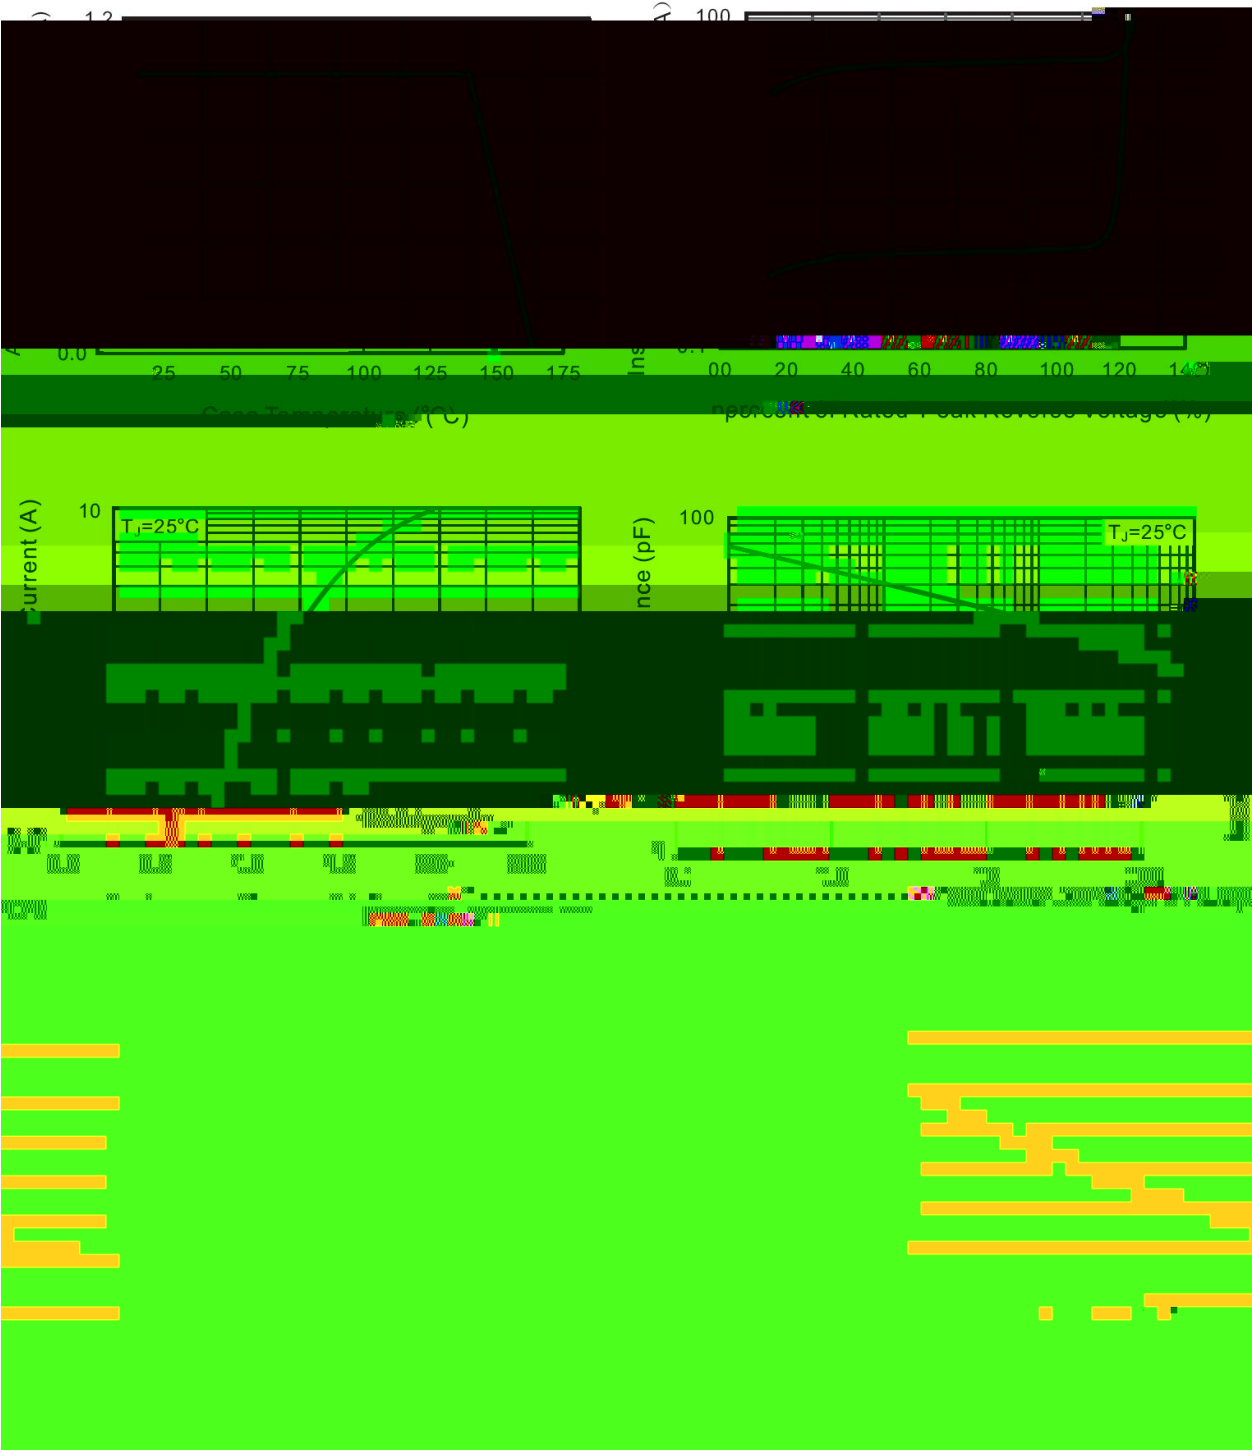


/ Package Dimensions

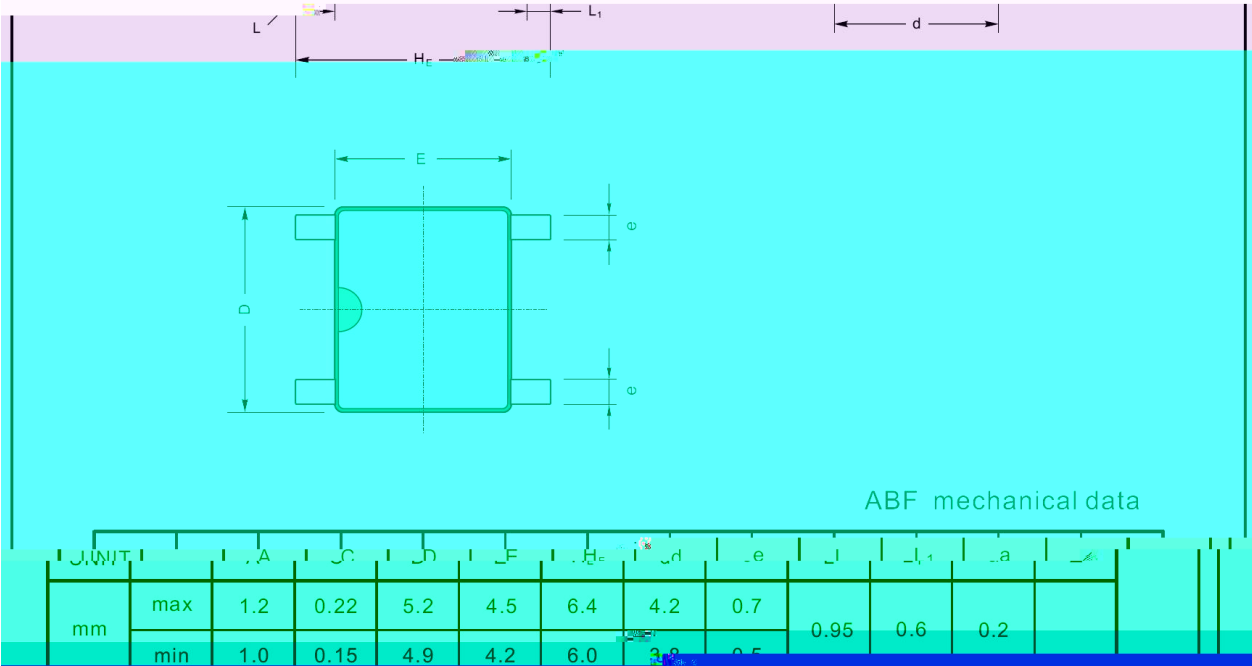


/ Marking Instructions

Marking

Type number	Marking code
FTB10F-10	F10F10
	


/ Marking Instructions

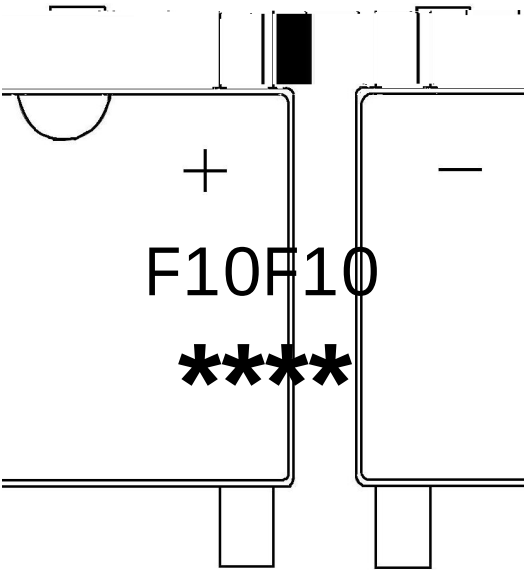

F10F10		
****	1	3

F10F10

() /

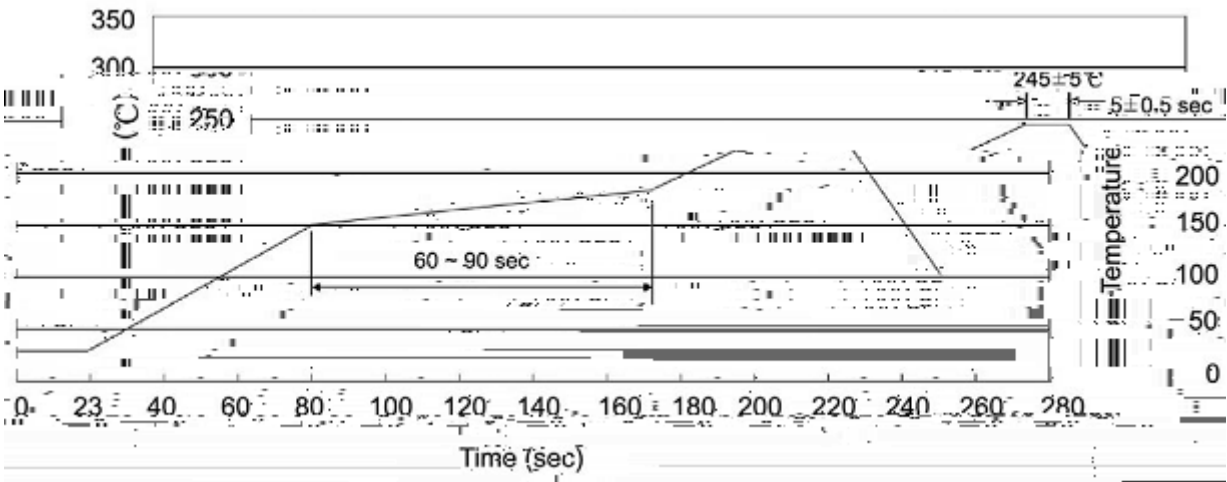

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± ± ±

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
ABF								

/ Notices