


TO-92LM NPN Silicon NPN transistor in a TO-92LM Plastic Package.







KSA928A
complementary pair with KSA928A.

Audio frequency amplifier applications.




PIN1 Base PIN 2 Collector PIN 3 Emitter


h_{FE} Classifications Symbol	O	Y
h_{FE} Range		

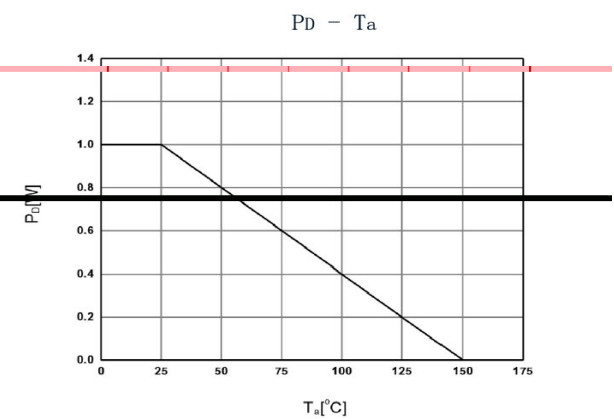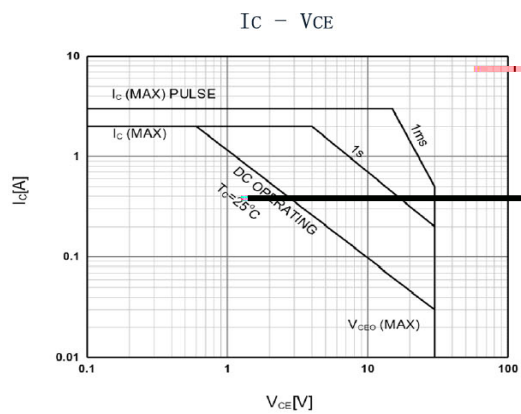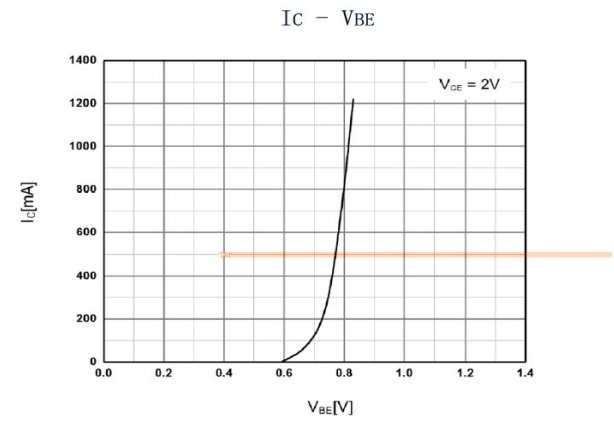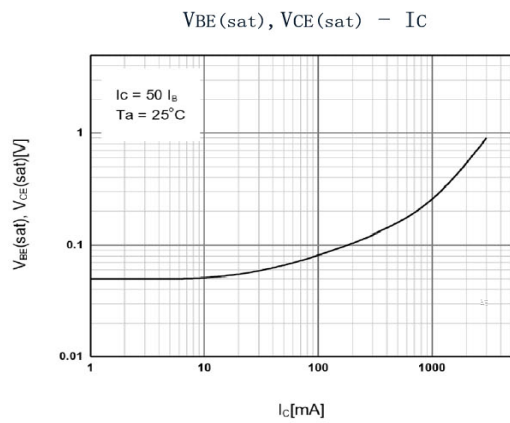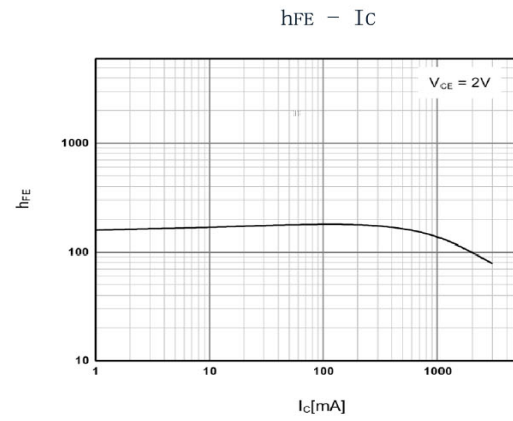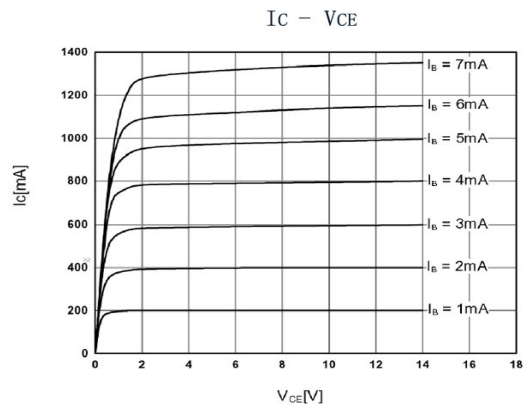

T0-92LM

Unit: mm

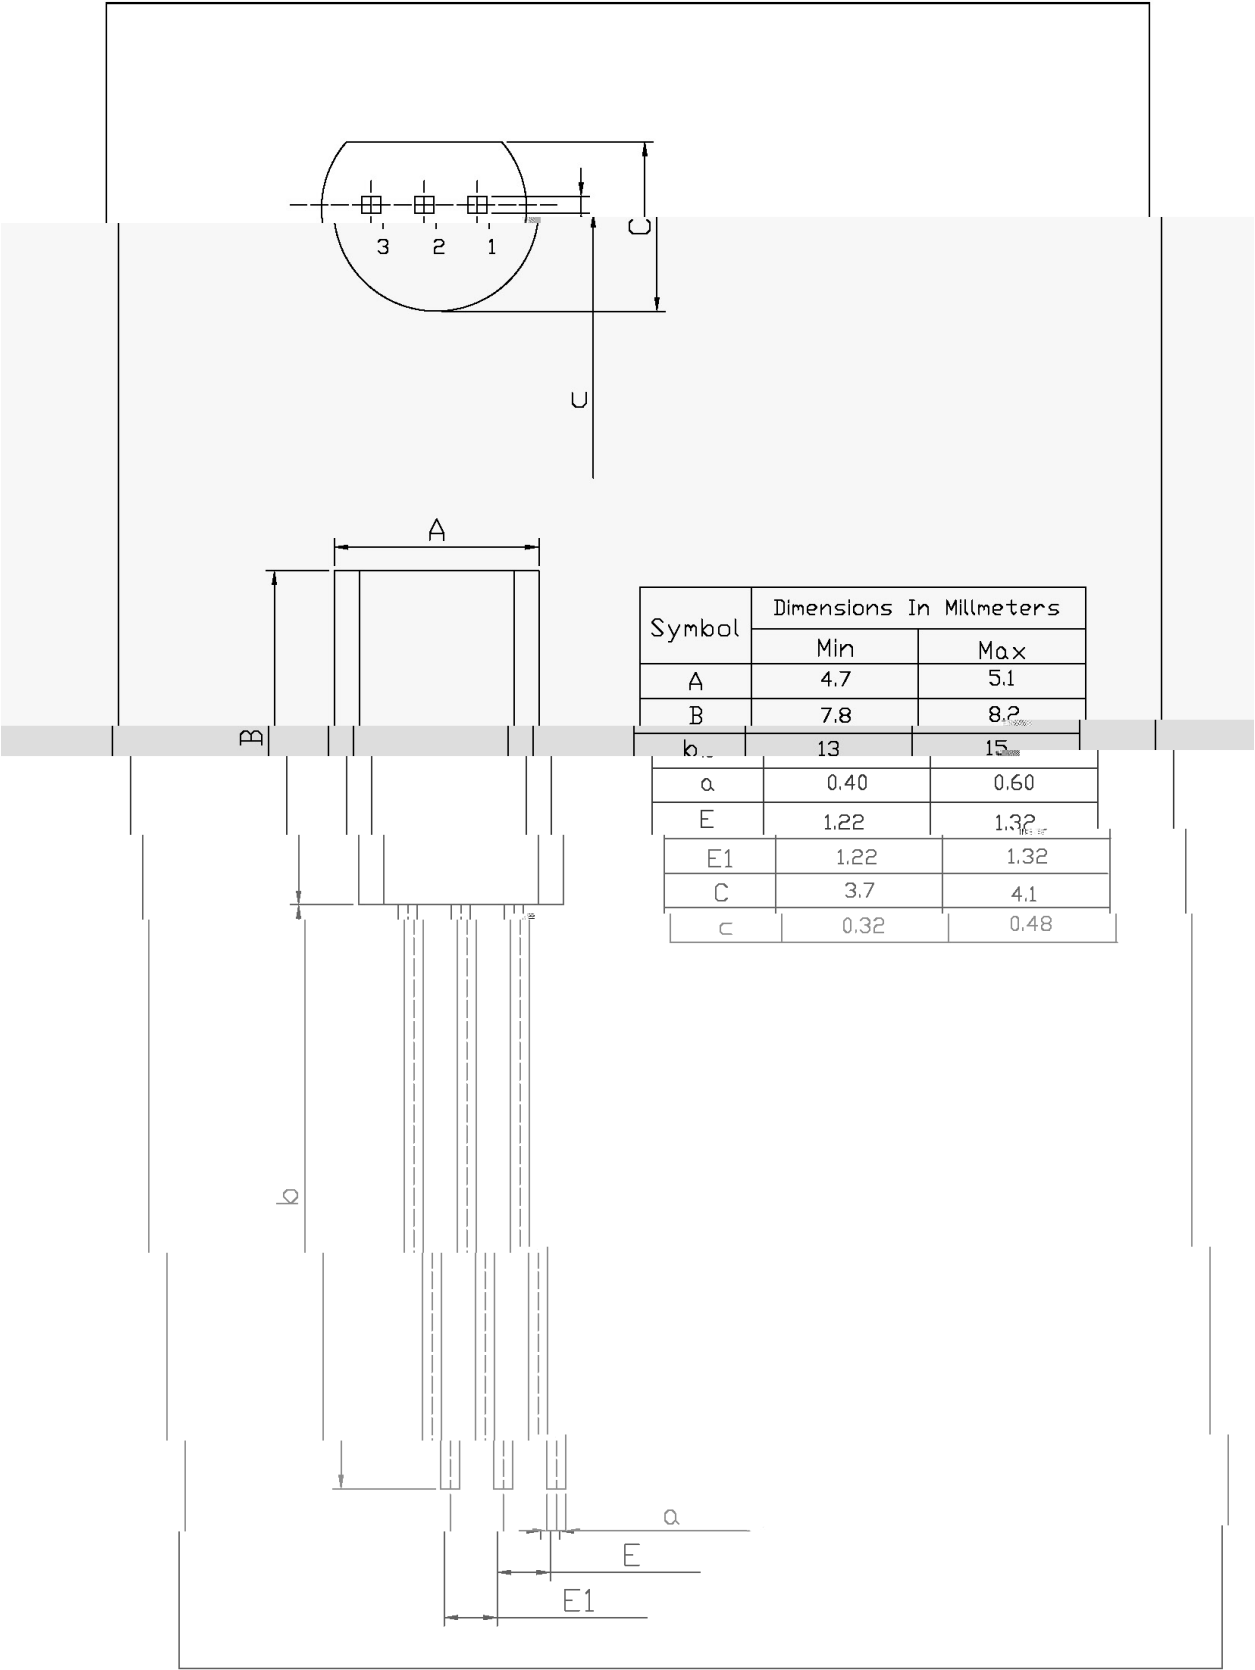



BR:

C2328A

O: h_{FE}

Note:

BR: Company Code.

C2328A: Product Type.

O: h_{FE} Classifications Symbol

****: Lot No. Code, code change with Lot No.



- 1

25 150

60 90sec;
- 2

255±5

5±0.5sec;
- 3

2 10

/sec.
- Note:

1.Preheating:25~150 , Time:60~90sec.

2.Peak Temp.:255±5 , Duration:5±0.5sec.

3. Cooling Speed: 2~10 /sec.

270±5

10±1 sec.

Temp.:270±5

Time:10±1 sec

/ BULK

Package Type	Units					Dimension		(unit mm3)

/ AMMO

Package Type	Units					Dimension		(unit mm3)