


KTC3209

TO-92LM                      NPN

，                      ，    KTA1281



|                                                                                           |  |  |  |  |  |  |  |  |  |
|-------------------------------------------------------------------------------------------|--|--|--|--|--|--|--|--|--|
| / $h_{FE}$ C(10.5 62.94 354ms.)JT04Tc0.7(10)10.5.16 343.363.7h)1404 Tc0.82 0.945 rg554 28 |  |  |  |  |  |  |  |  |  |
|-------------------------------------------------------------------------------------------|--|--|--|--|--|--|--|--|--|


/ Absolute Maximum Ratings(Ta=25 )

|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |

/ Electrical Characteristics(Ta=25 )

|  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |


## / Electrical Characteristic Curve

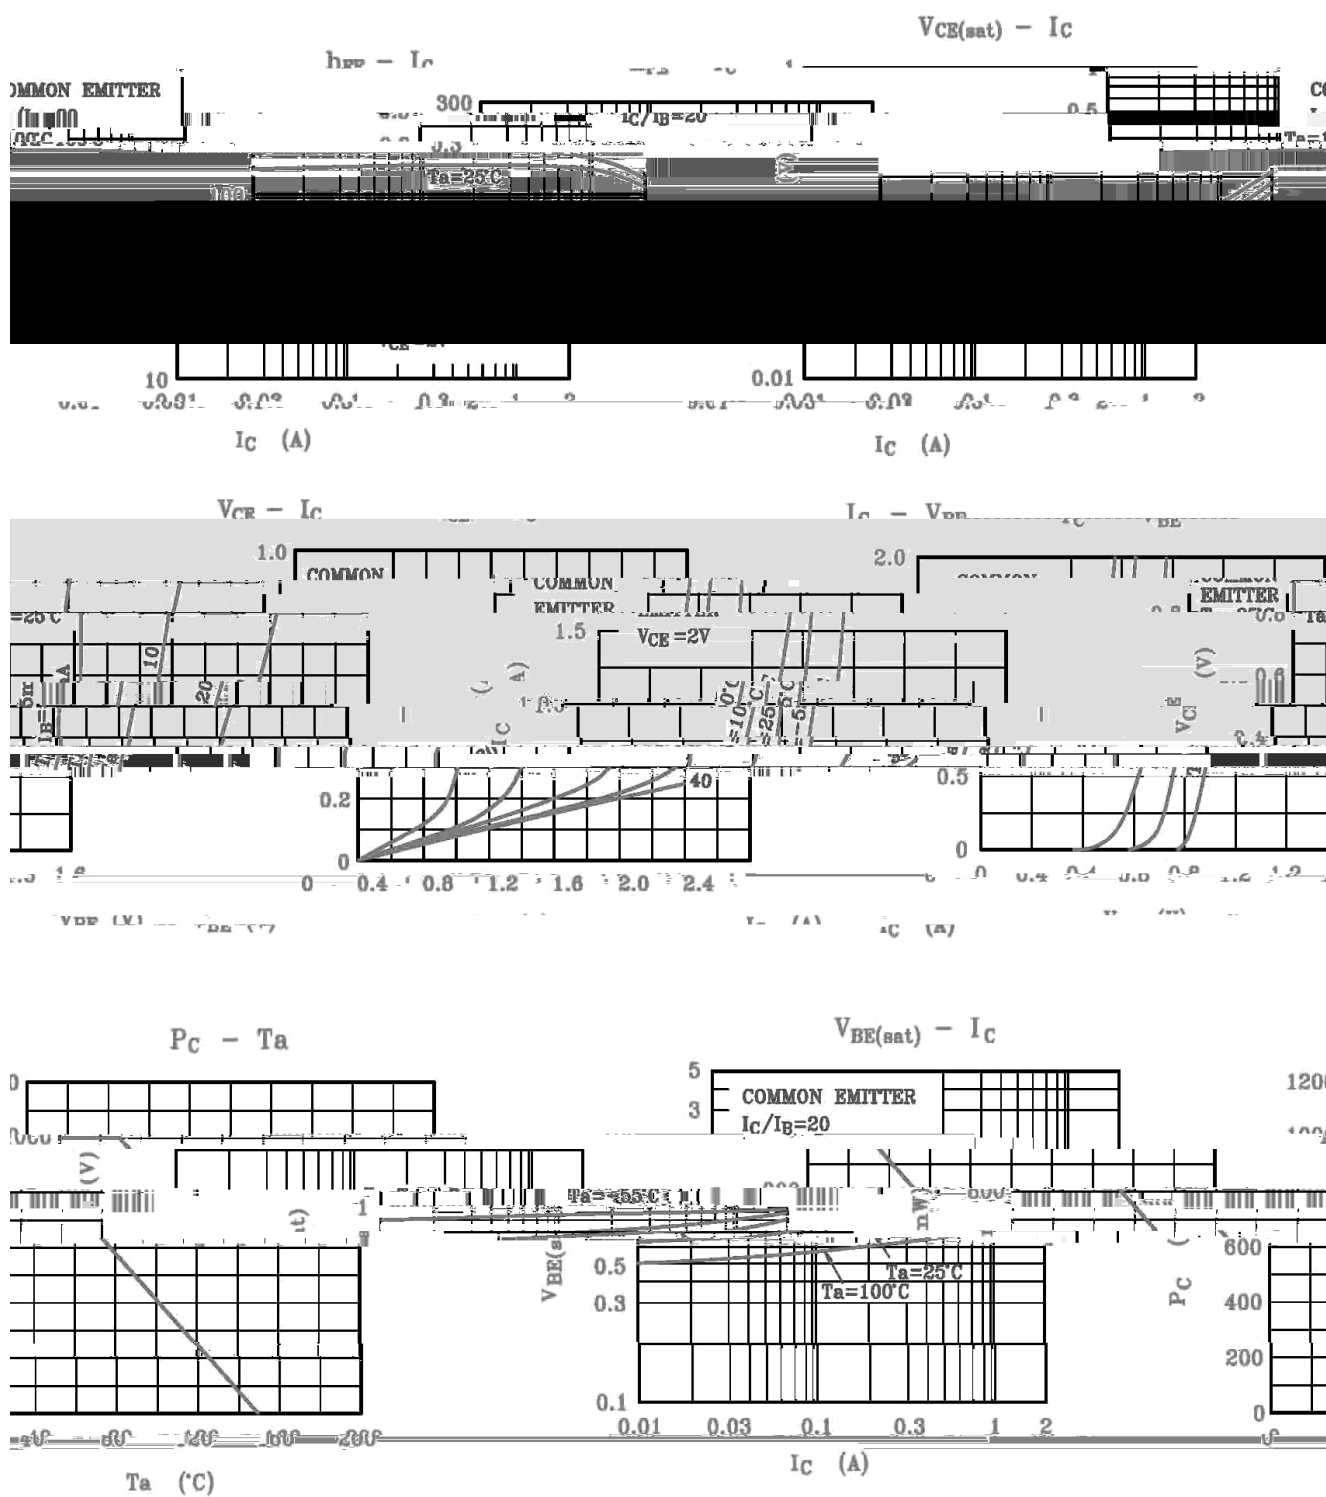


/ Package Dimensions

T0-92LM

Unit: mm

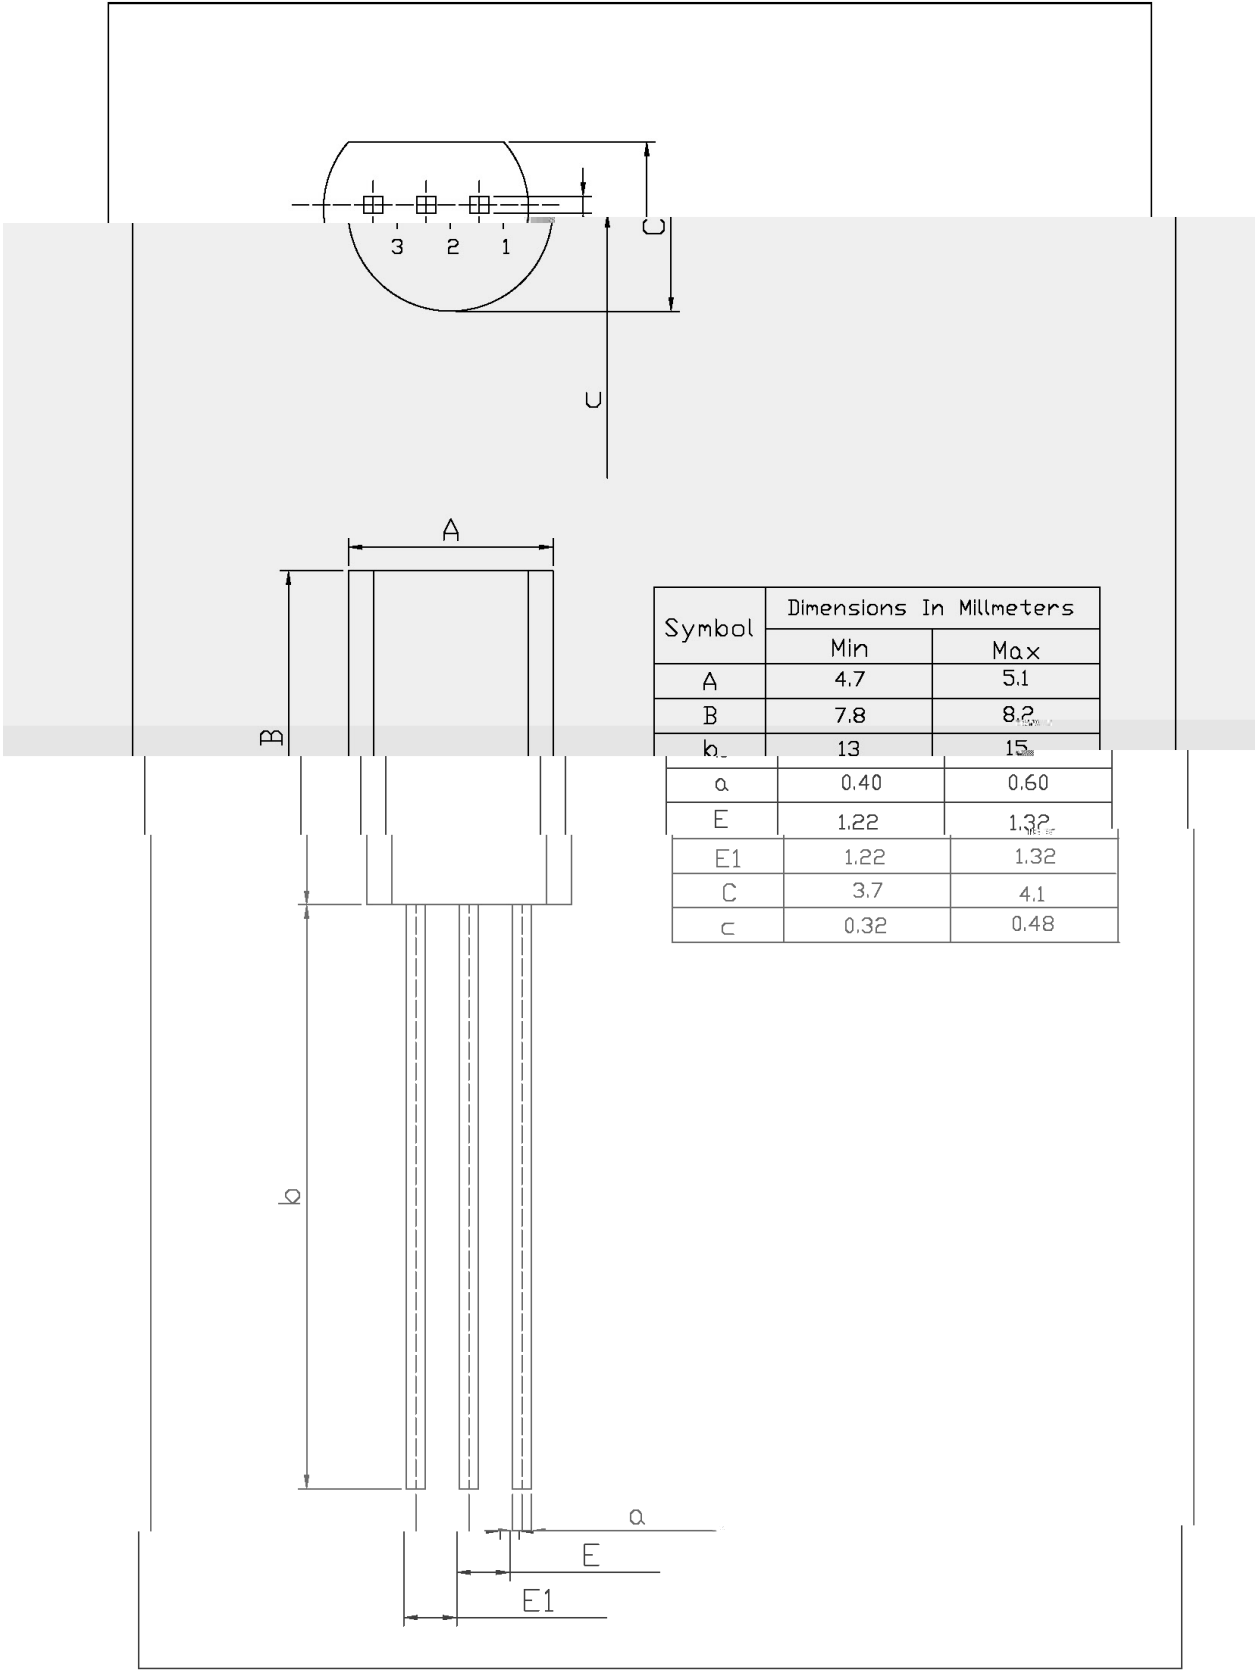


/ Marking Instructions

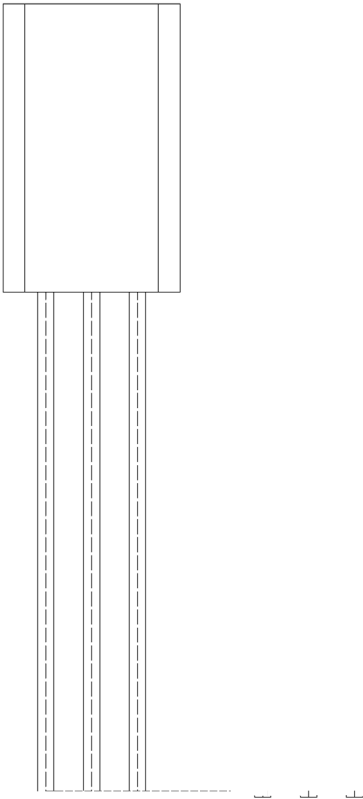

BR:  
C3209:  
O:  $h_{FE}$   
\*\*\*\*

( ) / Temperature Profile for Dip Soldering(Pb-Free)

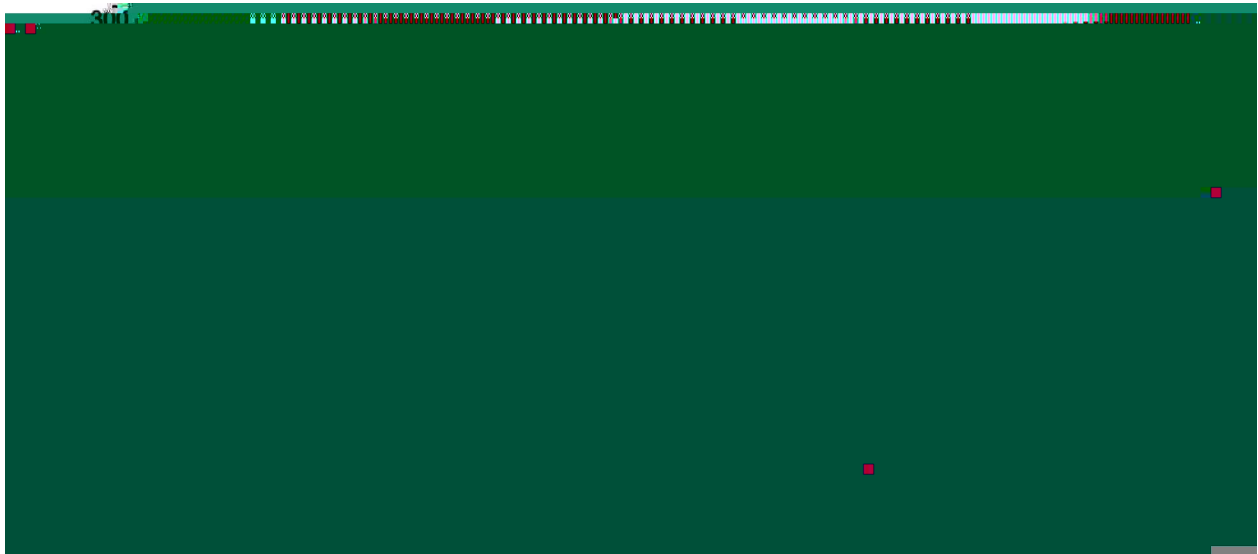 $\pm$  $\pm$  $\pm$  $\pm$ 

### / Resistance to Soldering Heat Test Conditions

 $\pm$  $\pm$  $\pm$  $\pm$ 

## / Packaging SPEC.

| 封装形式    | 包装数量             |                       |                        |                              |                        | 包装尺寸    |             |             |
|---------|------------------|-----------------------|------------------------|------------------------------|------------------------|---------|-------------|-------------|
|         | Units/Bag<br>只/袋 | Bags/Inner Box<br>袋/盒 | Units/Inner Box<br>只/盒 | Inner Boxes/Outer Box<br>盒/箱 | Units/Outer Box<br>只/箱 | Bag 袋   | Inner Box 盒 | Outer Box 箱 |
| TO-92LM | 1,000            | 8                     | 8,000                  | 5                            | 40,000                 | 135×190 | 237×172×102 | 560×245×195 |

| 封装形式    | 包装数量               |                        |                         |                              |                        | 包装尺寸        |                                  |
|---------|--------------------|------------------------|-------------------------|------------------------------|------------------------|-------------|----------------------------------|
|         | Units/tape<br>只/纸带 | Tape/Inner Box<br>纸带/盒 | Rows/Inner Box<br>纸带层/盒 | Inner Boxes/Outer Box<br>盒/箱 | Units/Outer Box<br>只/箱 | Inner Box 盒 | Outer Box 箱                      |
| TO-92LM | 2,500              | 1                      | 100                     | 10                           | 25,000                 | 328×230×42  | 小箱 480×346×235<br>大箱 547×407×268 |

## / Notices