

/ Descriptions

TO-220F

Schottky Diode in a TO-220F Plastic Package.

/ Features

Low forward voltage drop, low power losses, High efficiency operation.


/ Applications

OR-ing

DC-DC

For use in high frequency inverters, switching power supplies, freewheeling diodes, OR-ing diode, dc-to-dc converters and reverse battery protection.

/ Equivalent Circuit



/ Pinning



PIN1 Anode PIN 2 Cathode PIN 3 Anode

/ h_{FE} Classifications & Marking

See Marking Instructions.

LV20100FCT


Rev.F Apr.-2018




DATA SHEET

Parameter	Symbol	Rating	Unit
Peak Repetitive Reverse Voltage	V_{RM}	100	V
Working Peak Reverse Voltage	V_{RSM}		
DC Blocking Voltage	V_{DC}		

/ Package Dimensions

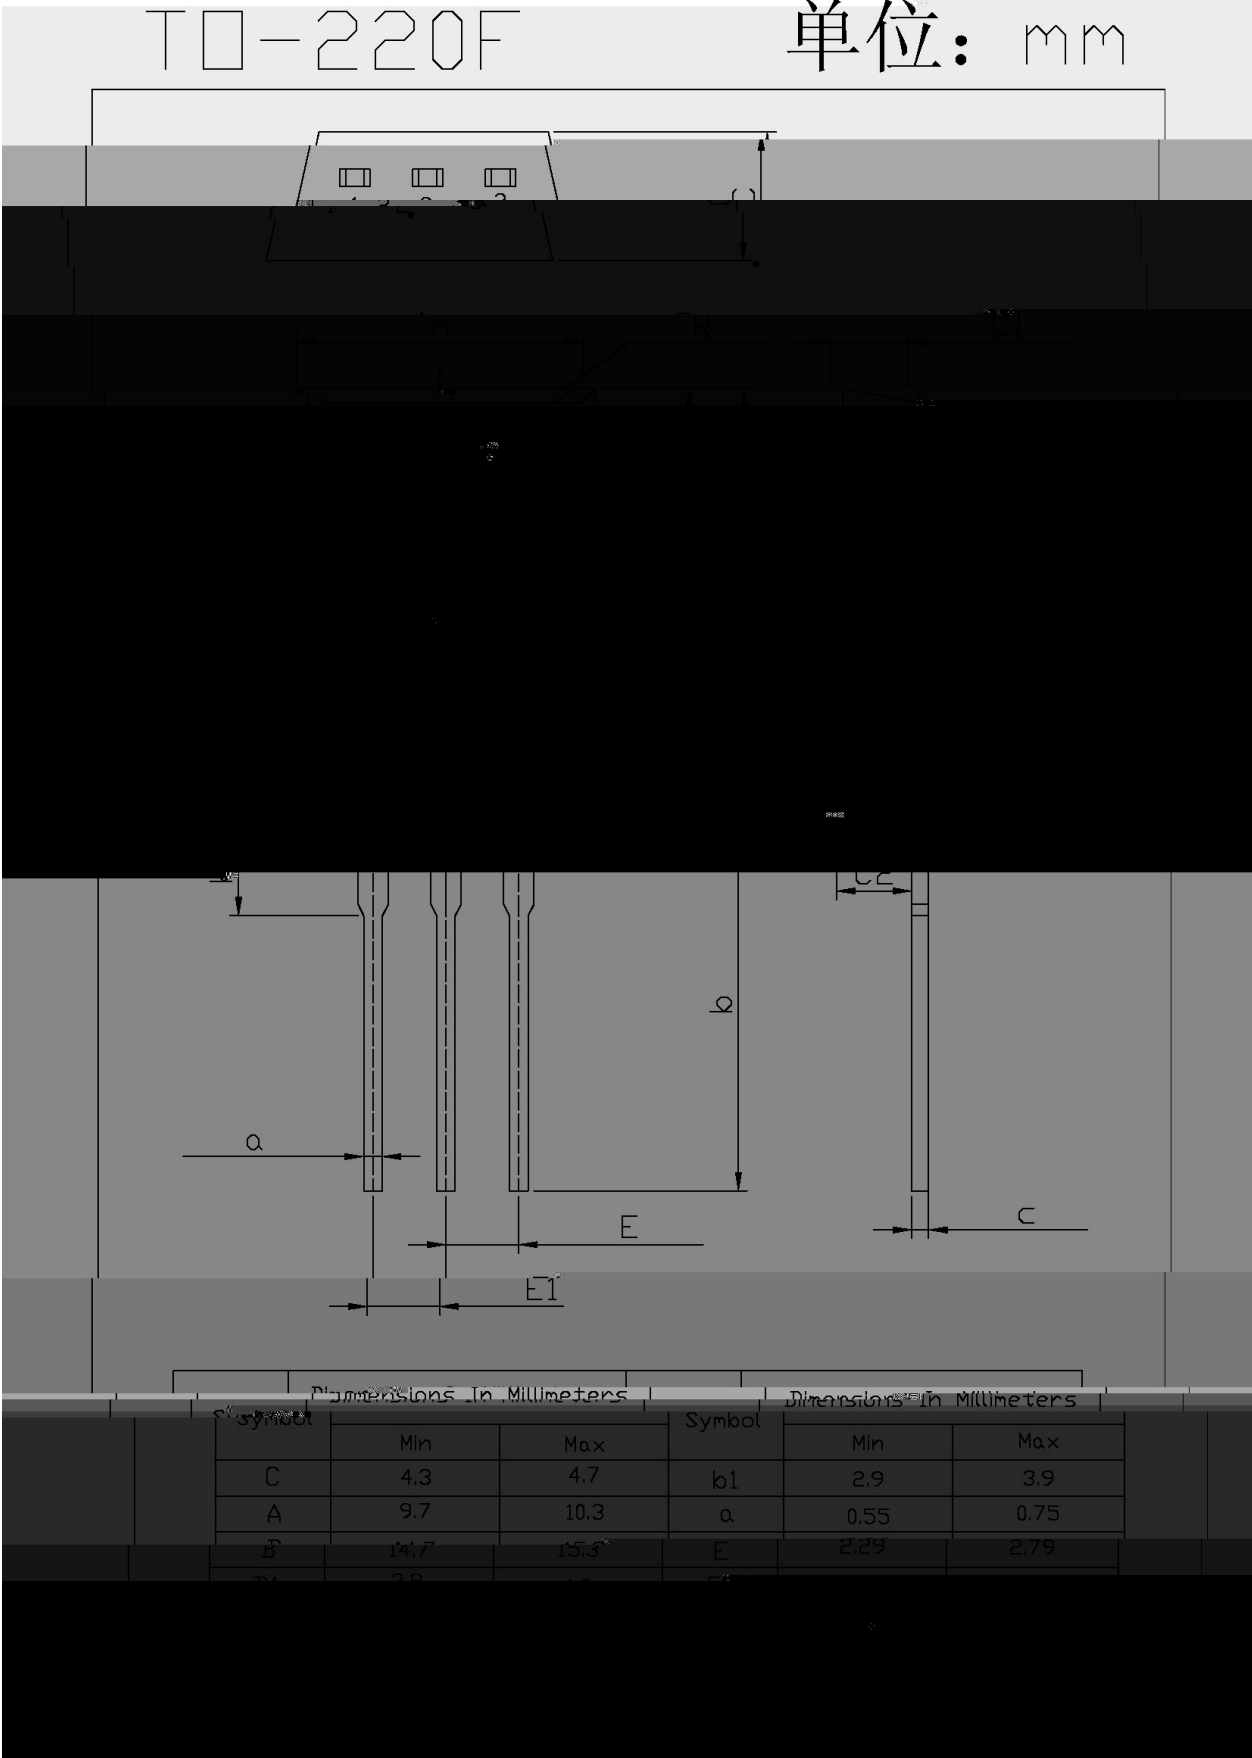

/ Marking Instructions

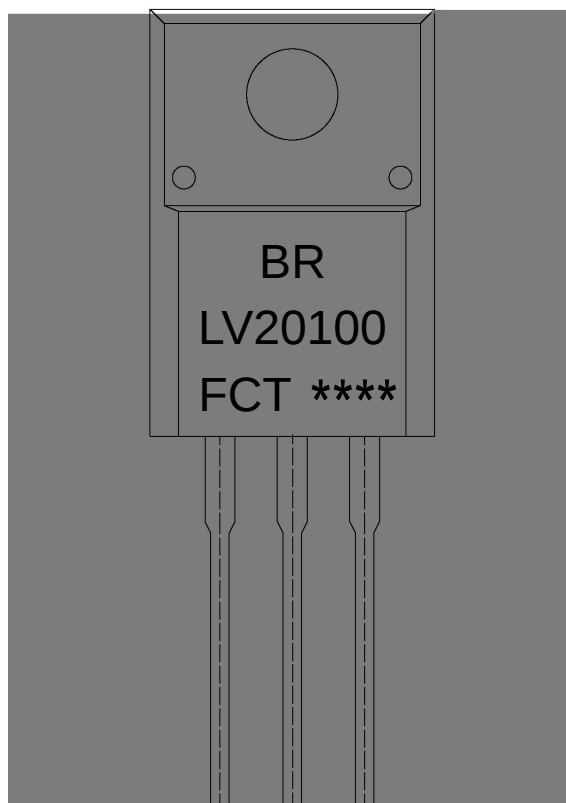

BR

LV10100

F:

CT:

Note:

BR: Company Code


LV10100: Product Type Code.

F Package Code

CT: Internal Structure

****: Lot No. Code, code change with Lot No.

() / Temperature Profile for Dip Soldering(Pb-Free)

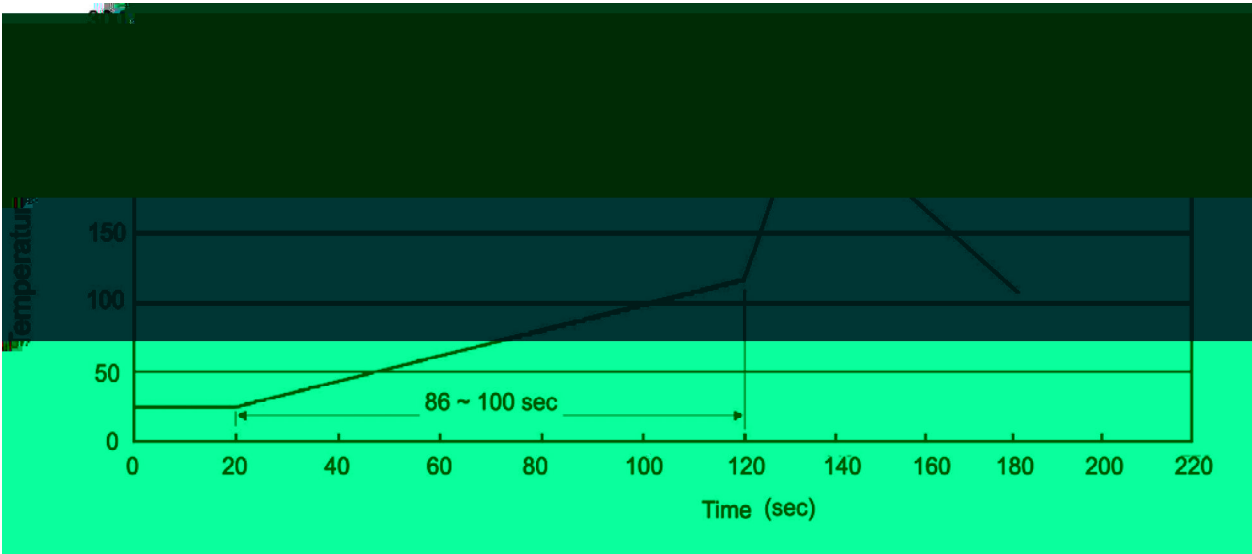

Note:

- 1

25 150

60 90sec;
- 2

255±5

5±0.5sec;
- 3

2 10 /sec.
- 1.Preheating:25~150

, Time:60~90sec.
- 2.Peak Temp.:255±5

, Duration:5±0.5sec.
3. Cooling Speed: 2~10

/sec.

/ Resistance to Soldering Heat Test Conditions

270±5 10±1 sec. Temp.:270±5℃ Time:10±1 sec

/ Packaging SPEC.

/ BULK

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Bag 只/袋	Bags/Inner Box 袋/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Bag 袋	Inner Box 盒	Outer Box 箱
TO-220/F	200	10	2,000	5	10,000	135×190	237×172×102	560×245×195