


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning



/ Marking


/ Absolute Maximum Ratings(Ta=25 –)

			℃
			℃


/ Electrical Characteristics(Ta=25 –)

		μ				
		μ				
						μ
						μ


/ Electrical Characteristic Curve

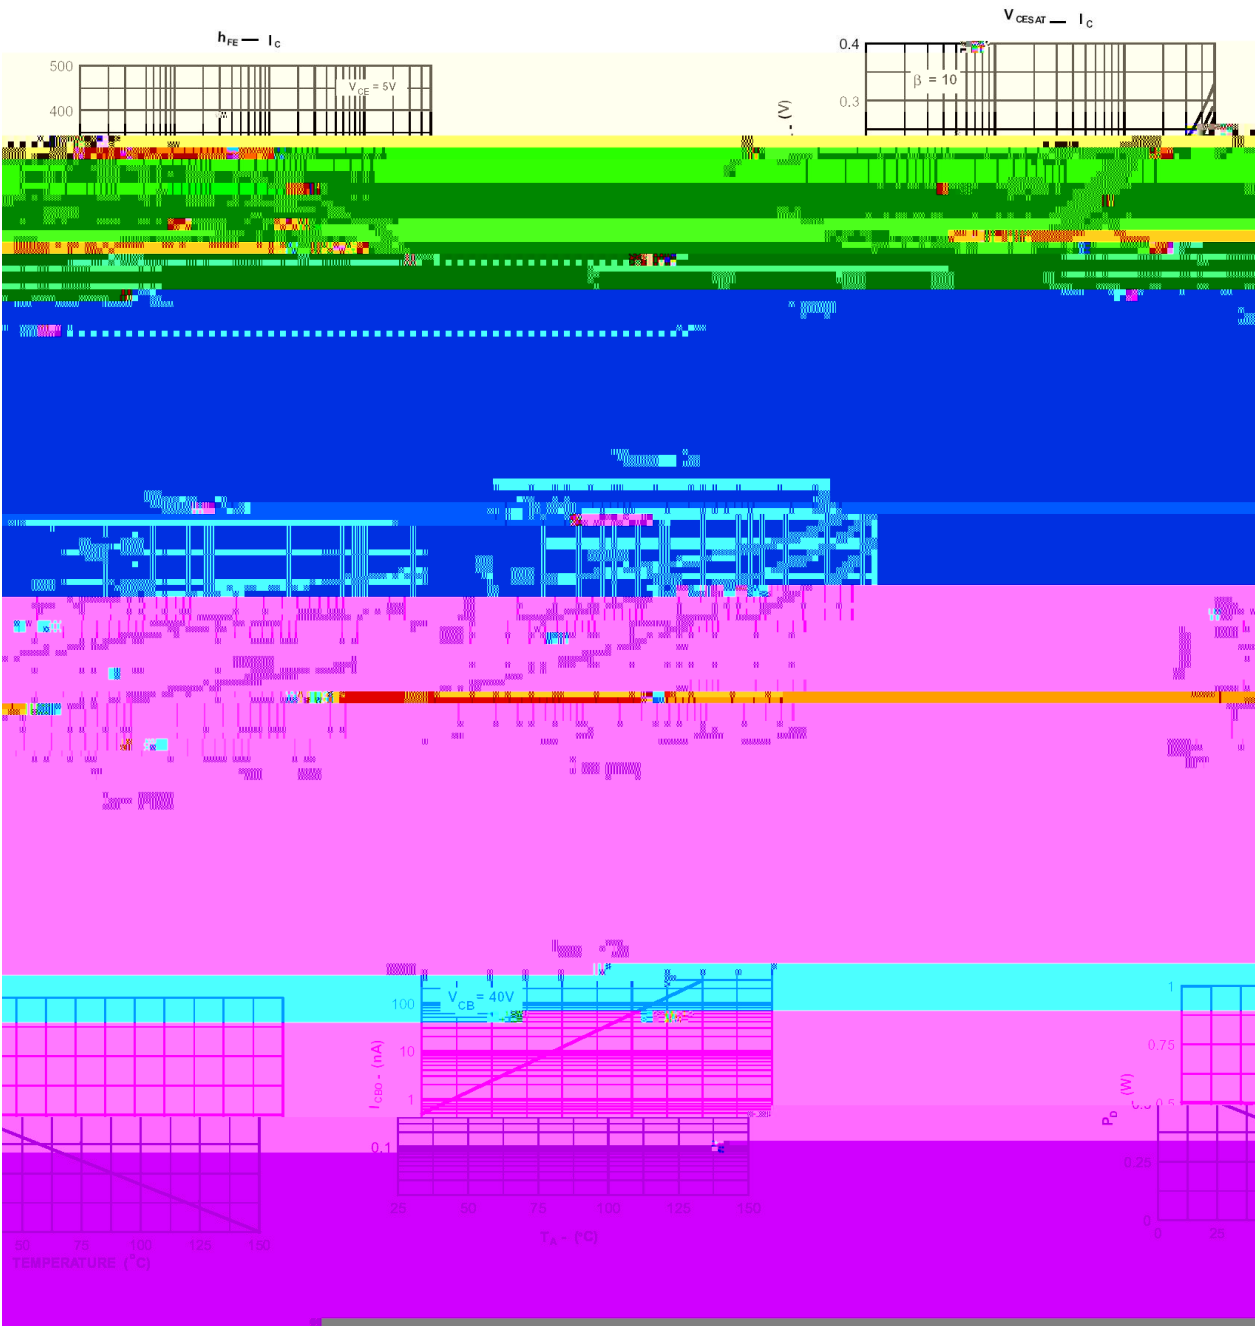

/ Marking Instructions

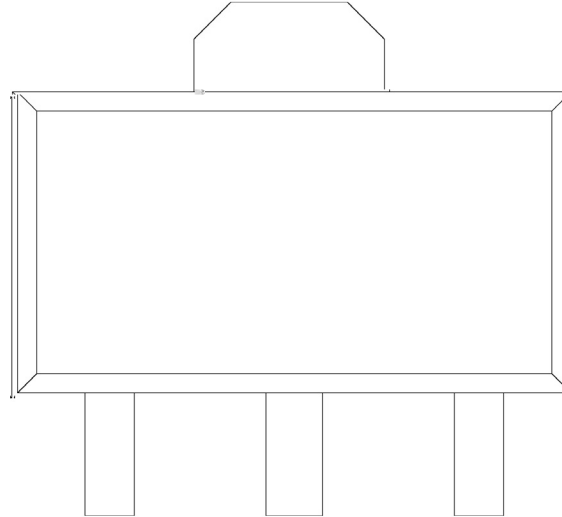

() / Whp shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0luhh,

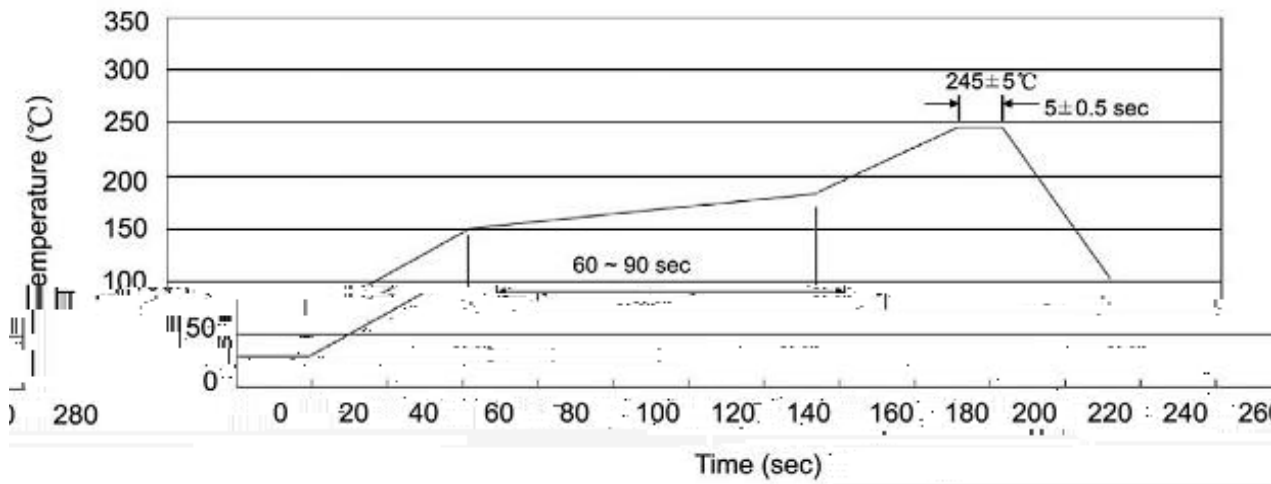

/ Resistance to Soldering Heat Test Conditions

°C

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-89	1,000	7	7,000	8	56,000	7 ×12	180×120×180	385×257×392

/ Notices