

MMBT3906W

Rev.F Dec.-2024

/ Descriptions

SOT-323 PNP Silicon PNP transistor in a SOT-323 Plastic Package.


/ Features

Low current, Low voltage, HF Product.


/ Applications

General purpose amplifier and switching.

/ Equivalent Circuit



/ Pinning

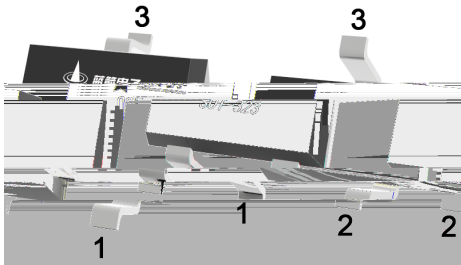

PIN1 Base PIN 2 Emitter PIN 3 Collector

/ h_{FE} Classifications & Marking

Marking	H2A
---------	-----



Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-40	V
Collector to Emitter Voltage	V_{CEO}	-40	V
Emitter to Base Voltage	V_{EBO}	-5.0	V
Collector Current - Continuous	I_C	-200	mA
Collector Power Dissipation	P_C	200	mW
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 150	

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector to Base Breakdown Voltage	V_{CBO}	$I_C = -10\mu A$ $I_E = 0$	-40			V
Collector to Emitter Breakdown Voltage	V_{CEO}	$I_C = -1.0mA$ $I_B = 0$	-40			V
Emitter to Base Breakdown Voltage	V_{EBO}	$I_E = -10\mu A$ $I_C = 0$	-5.0			V
Collector Cut-Off Current	I_{CBO}	$V_{CB} = -30V$ $I_E = 0$			-0.05	μA
Emitter to Base Current	I_{EBO}	$V_{EB} = -3.0V$ $I_C = 0$			-0.05	μA
DC Current Gain	$h_{FE(1)}$	$V_{CE} = -1.0V$ $I_C = -10mA$	100		300	
	$h_{FE(2)}$	$V_{CE} = -1.0V$ $I_C = -100mA$	30			
	$h_{FE(3)}$	$V_{CE} = -1.0V$ $I_C = -50mA$	60			
	$h_{FE(4)}$	$V_{CE} = -1.0V$ $I_C = -1.0mA$	80			
	$h_{FE(5)}$	$V_{CE} = -1.0V$ $I_C = -0.1mA$	60			
Collector to Emitter Saturation Voltage	$V_{CE(sat) (1)}$	$I_C = -10mA$ $I_B = -1.0mA$			-0.25	V
	$V_{CE(sat) (2)}$	I_C				


/ Electrical Characteristics(Ta=25)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Transition Frequency	f_T	$I_C = -10\text{mA}$ $V_{CE} = -20\text{V}$ $f = 100\text{MHz}$	250			MHz
Collector output capacitance	C_{ob}	$V_{CB} = -5.0\text{V}$ $f = 1.0\text{MHz}$			4.5	pF
Storage Time	t_{stg}	$V_{CC} = -3.0\text{V}$ $I_C = -10\text{mA}$ $I_{B1} = -I_{B2} = -1.0\text{mA}$			225	ns
Fall Time	t_f	$V_{CC} = -3.0\text{V}$ $I_C = -10\text{mA}$ $I_{B1} = -I_{B2} = -1.0\text{mA}$			75	ns
Delay Time	t_d	$V_{CC} = -3.0\text{V}$ $V_{BE} = -0.5\text{V}$ $I_C = -10\text{mA}$ $I_{B1} = -1.0\text{mA}$			35	ns
Rise Time	t_r	$V_{CC} = -3.0\text{V}$ $V_{BE} = -0.5\text{V}$ $I_C = -10\text{mA}$ $I_{B1} = -1.0\text{mA}$			35	ns
Input Capacitance	C_{ib}	$V_{EB} = -0.5\text{V}$ $f = 1.0\text{MHz}$			10	pF


/ Electrical Characteristic Curve

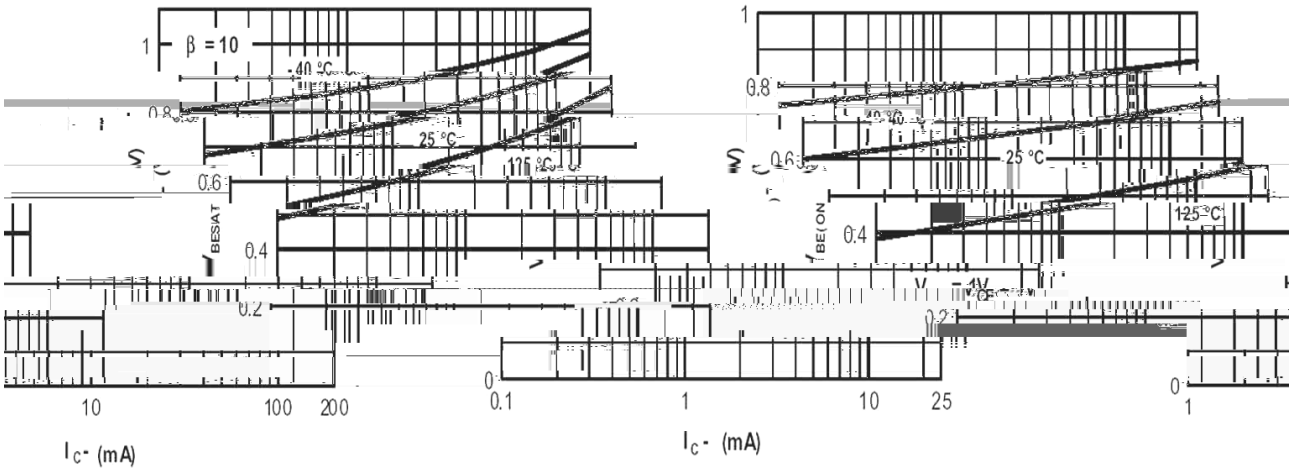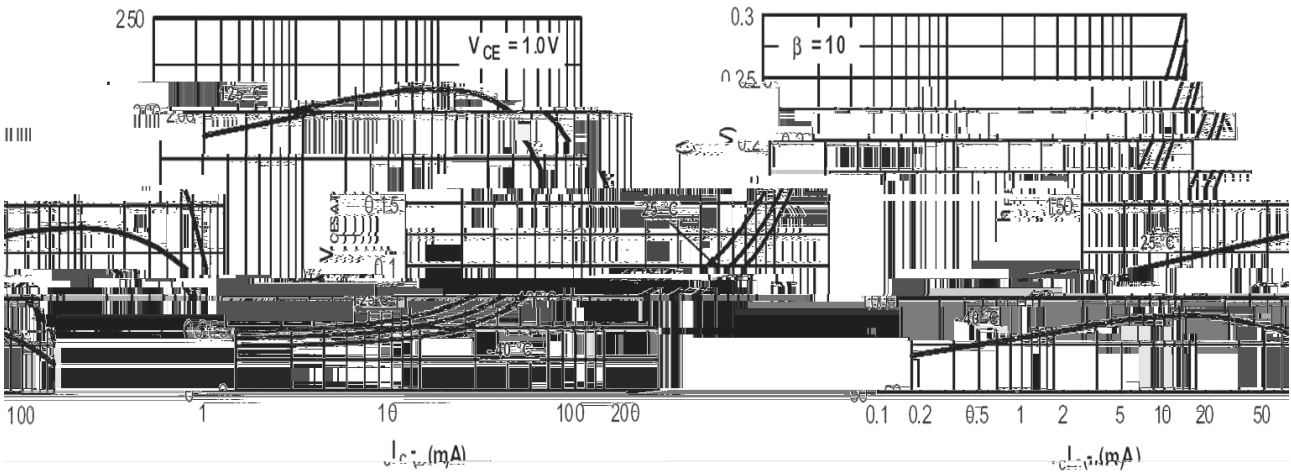

/ Package Dimensions

SOT-323


单位: mm

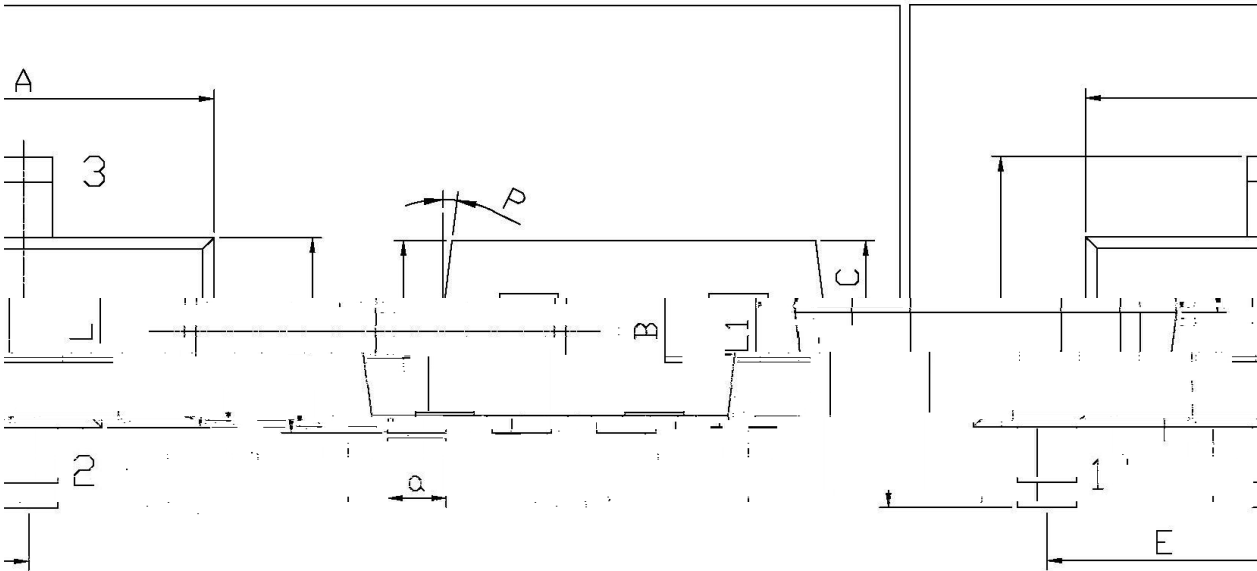

Symbol		Dimensions In Millimeters		Symbol		Dimensions In Millimeters	
Min	Max	Min	Max	Min	Max	Min	Max
1.95	2.35	0	0.30	0.50			
2.00	2.20	0.85	0.95				
1.20	1.40	a	0.20	0.40			
1.15	1.35	p	7°				

E	
B	

/ Marking Instructions

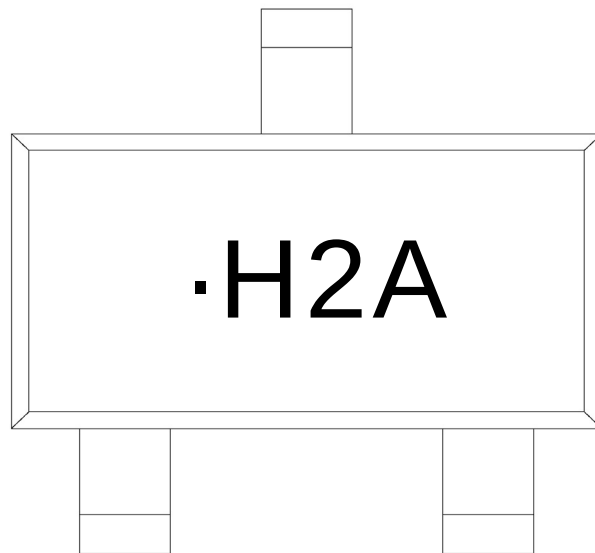

·

H

2A

Note:


·

Identify

H: Company Code

2A: Product Type Code

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

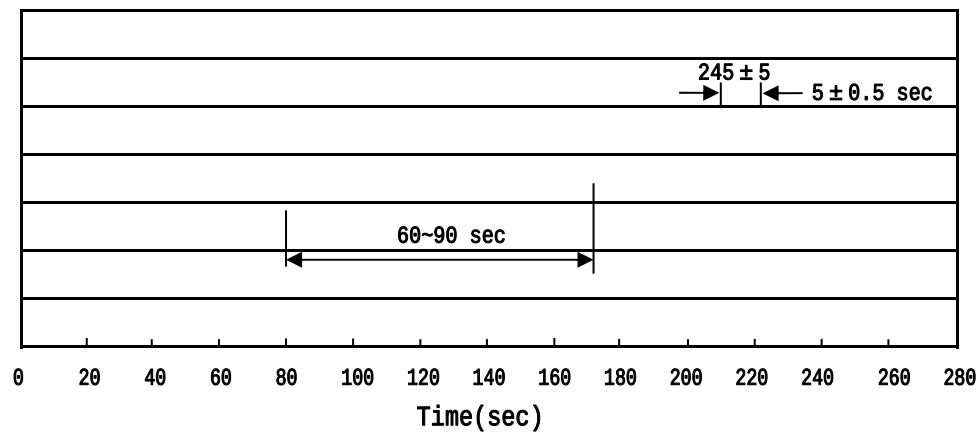

Note:

- 1

150 180

60 90sec;

1.Preheating:150~180 , Time:60~90sec.
- 2

245±5

5±0.5sec;

2.Peak Temp.:245±5 , Duration:5±0.5sec.
- 3

2 10 /sec.

3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
SOT-323	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205

/ Notices