


[illegible]

SOT-23 NPN

1 ESD 4kV, 400V

Ic 500mA






/ h_{FE} Classifications & Marking

	~

			°C
		~	°C



/ Electrical Characteristic Curve

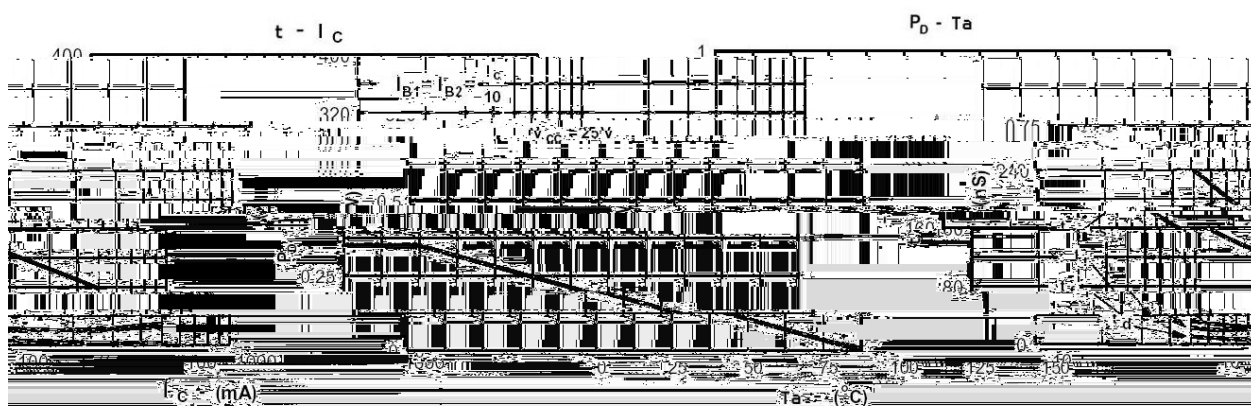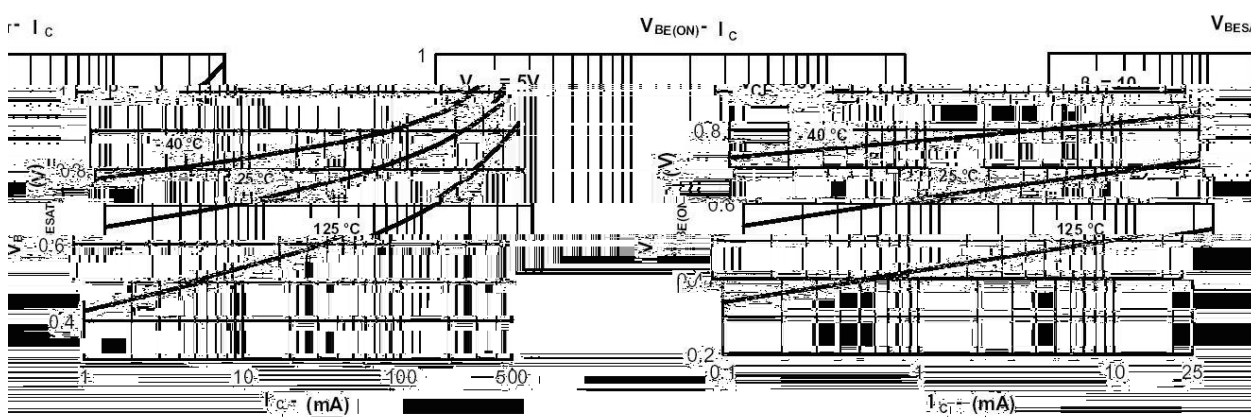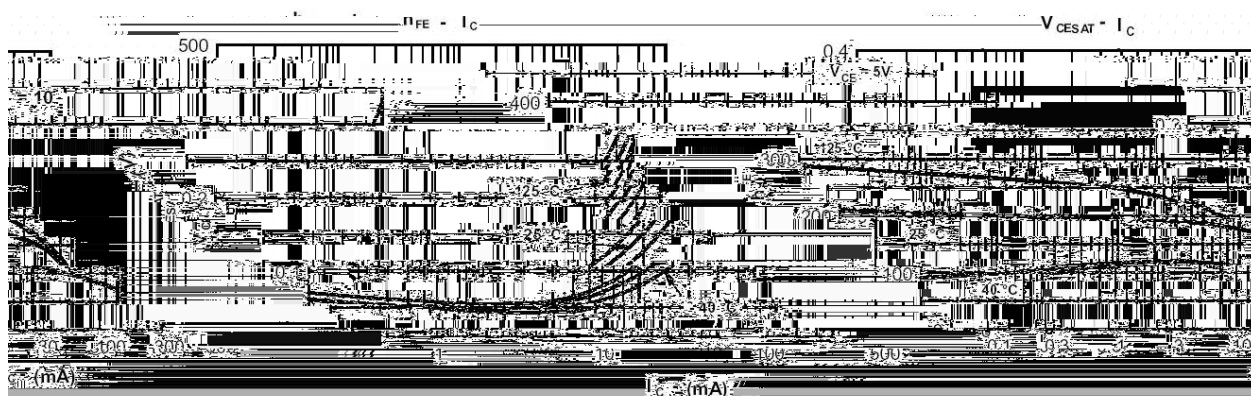

/ Package Dimensions


SOT-23

单位

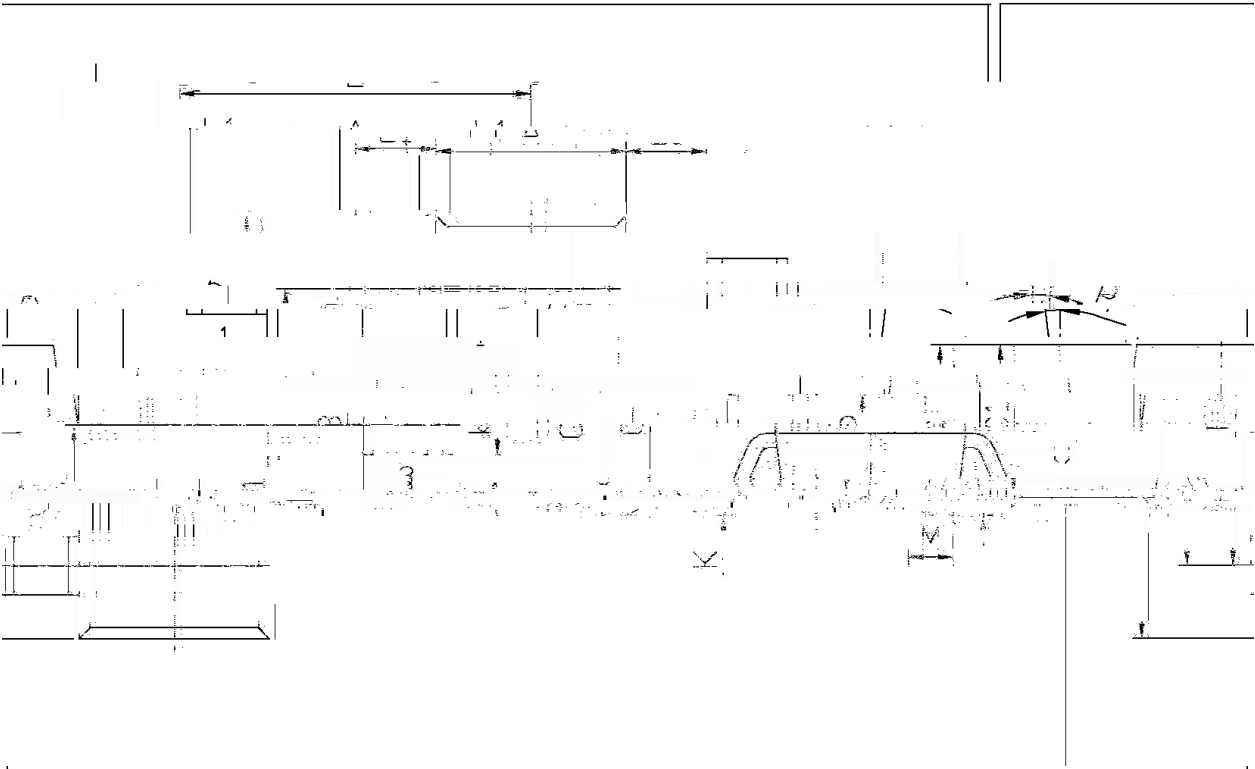

In Millimeters		Dimensions In Millimeters		Dimensions	
Symbol	Max	Min	Max	Symbol	Min
L	3.0Max	2.2	2.7	C	1.0
a	0.80	0.40	0.60	b	0.80
e	0.95	0.50	0.60	d	0.30
f	0.20Min	0.10	0.20	M	0.35

/ Marking Instructions

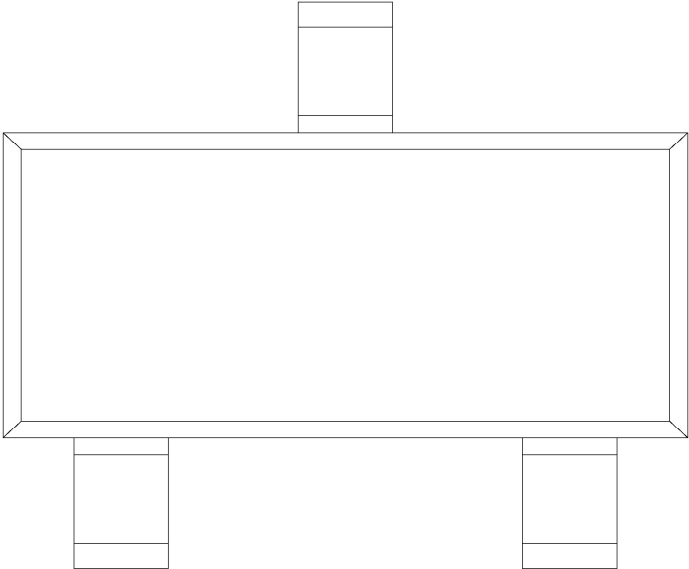

H

H

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

±

°C

±

°C

±

°C

±

°C

/ Resistance to Soldering Heat Test Conditions

± °C

±

°C

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱
						"		